





# SHAPING BEAUTY, PERFECTING SPACES

OUR MISSION IS TO SHAPE THE BEAUTY OF NATURE INTO TILES THAT ENHANCE THE
AESTHETIC OF EVERY ROOM. WITH A FOCUS ON PRECISION, SUSTAINABILITY, AND
LASTING QUALITY, WE STRIVE TO CREATE TILES THAT ARE NOT JUST FUNCTIONAL, BUT
WORKS OF ART THAT LEAVE A LASTING IMPRESSION.


AT YOUR CERAMICA, WE ARE DEDICATED TO REDEFINING HOW SPACES ARE DESIGNED, ENSURING EACH TILE WE CRAFT BECOMES A PIECE OF ART THAT STANDS

THE TEST OF TIME.

AT YOUR CERAMICA, WE BELIEVE THAT EVERY TILE WE CREATE IS MORE THAN JUST A

PRODUCT – IT'S A MASTERPIECE. WITH A COMMITMENT TO QUALITY AND
INNOVATION, WE DRAW INSPIRATION FROM THE BEAUTY AND DIVERSITY OF THE
NATURAL WORLD. OUR TILES ECHO THE TEXTURES, COLORS, AND PATTERNS OF
NATURE, BLENDING ARTISTRY WITH ADVANCED TECHNOLOGY.




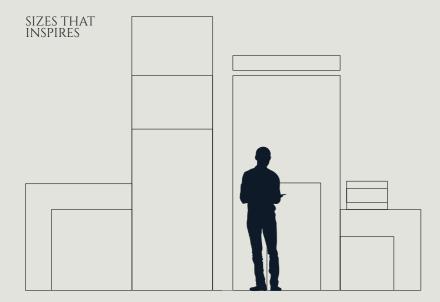

NATURE'S SERENE LANDSCAPES SERVE AS OUR MUSE. FROM THE CALMING HUES
OF TRANQUIL WATERS TO THE GENTLE TEXTURES OF WEATHERED STONE, OUR
DESIGNS ARE INSPIRED BY THE WORLD'S MOST PEACEFUL AND CAPTIVATING
ENVIRONMENTS. EACH TILE CAPTURES THE ESSENCE OF NATURE'S CALM AND
INTEGRATES IT SEAMLESSLY INTO YOUR LIVING SPACES.

OUR TILES ARE CRAFTED WITH PRECISION, REFLECTING THE SUBTLE ELEGANCE AND ENDURING STRENGTH FOUND IN NATURE. BY COMBINING THESE NATURAL ELEMENTS WITH INNOVATIVE TECHNOLOGY AND ECO-FRIENDLY PRACTICES, WE ENSURE THAT EVERY TILE FROM YOUR CERAMICA ENHANCES THE SERENITY OF YOUR SURROUNDINGS WHILE OFFERING SUPERIOR DURABILITY AND PERFORMANCE.

WWW.YOURCERAMICA.COM

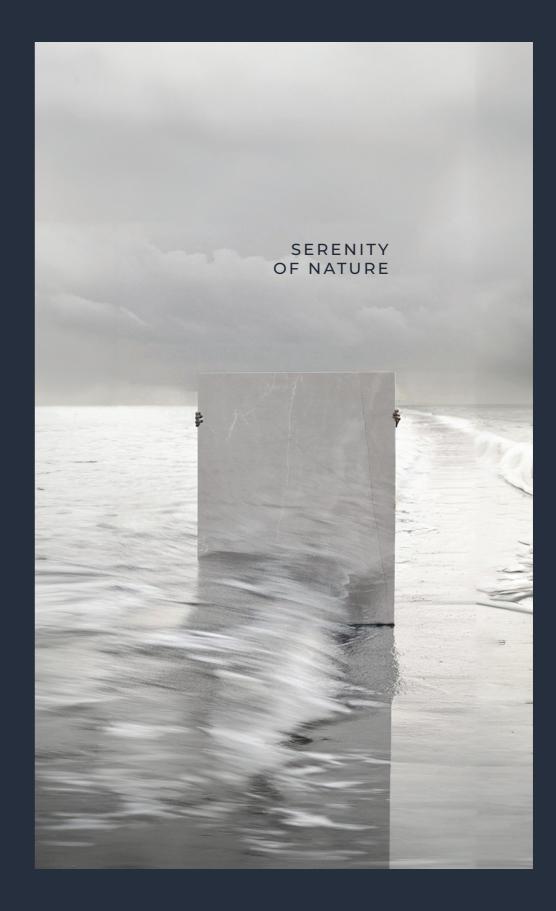





### UNMATCHED QUALITY & PERFORMANCE

AT YOUR CERAMICA, WE CREATE STYLISH AND PRACTICAL TILES THAT

ARE EASY TO MAINTAIN AND 100% WATERPROOF. OUR TILES OFFER

SUPERIOR CHEMICAL RESISTANCE, ARE SCRATCH AND WEAR RESISTANT,

AND MADE WITH ECO-FRIENDLY MATERIALS. THEY ARE PERFECT FOR

ANY SPACE, PROVIDING A BLEND OF STUNNING DESIGN AND

EXCEPTIONAL FUNCTIONALITY.



### ELEVATE EVERY SPACE

IMAGINE A KITCHEN THAT BLENDS ELEGANCE WITH PRACTICALITY, OR A BATHROOM THAT EXUDES TRANQUILITY AND MODERNITY. OUR DIVERSE RANGE OF TILES IS DESIGNED TO ENHANCE EVERY ROOM, TURNING ORDINARY SPACES INTO EXTRAORDINARY EXPERIENCES.


















Airport




Cozy House




Hospital

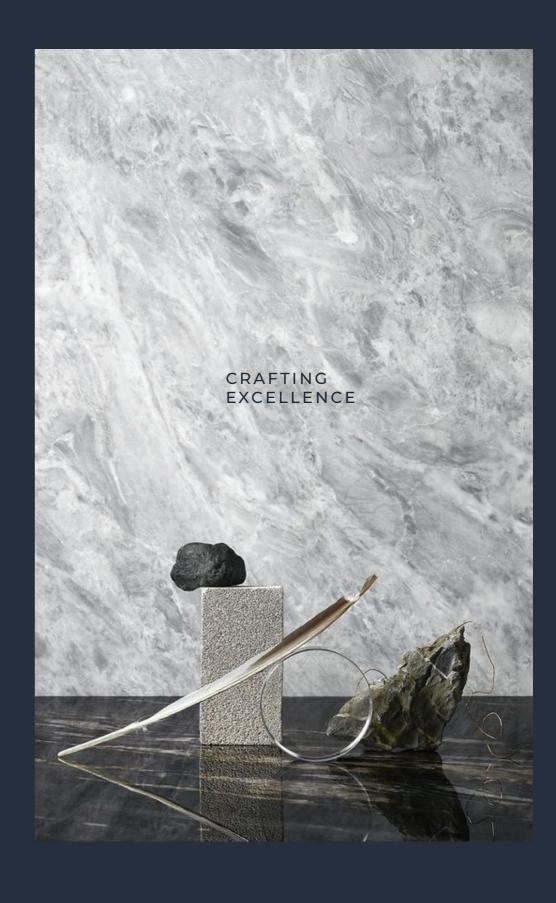


### **BRAZILIAN BLACK**

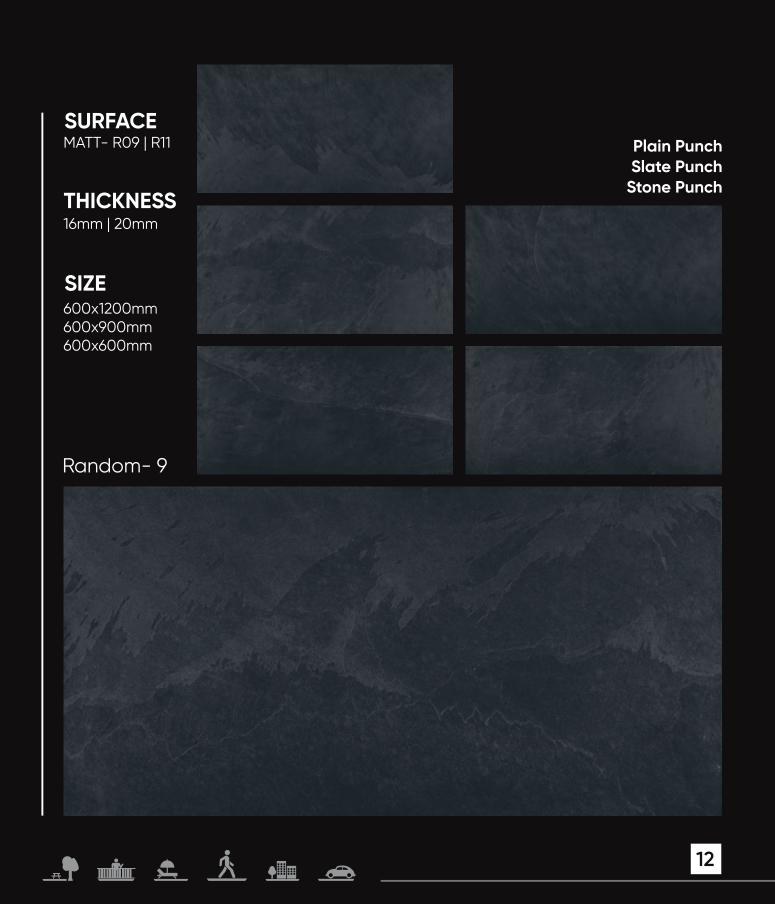


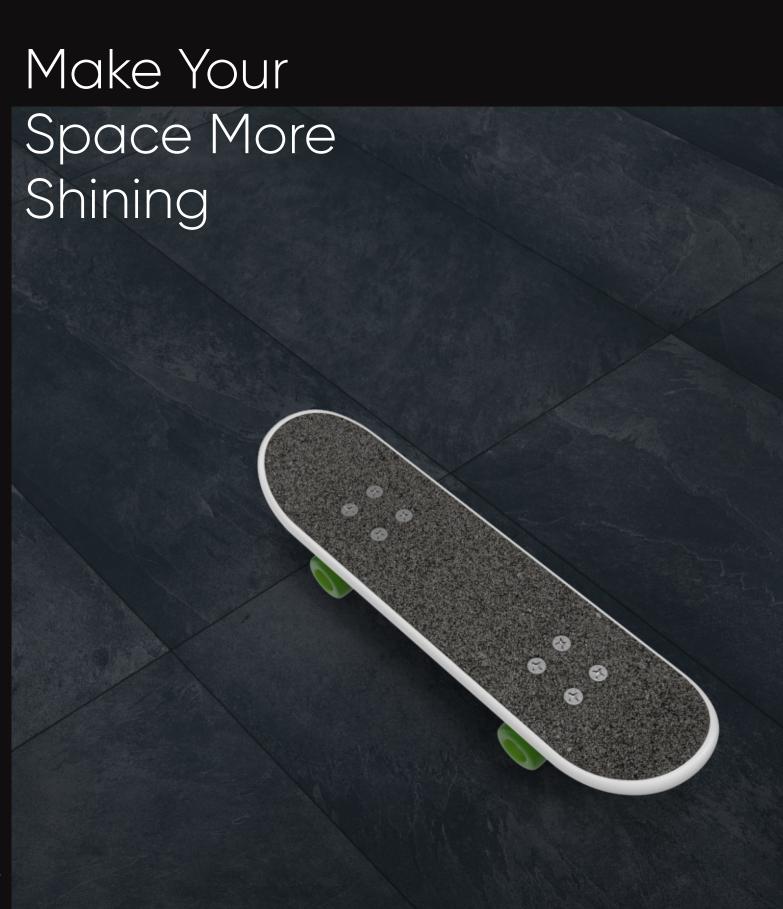




### **BRAZILIAN GREY**

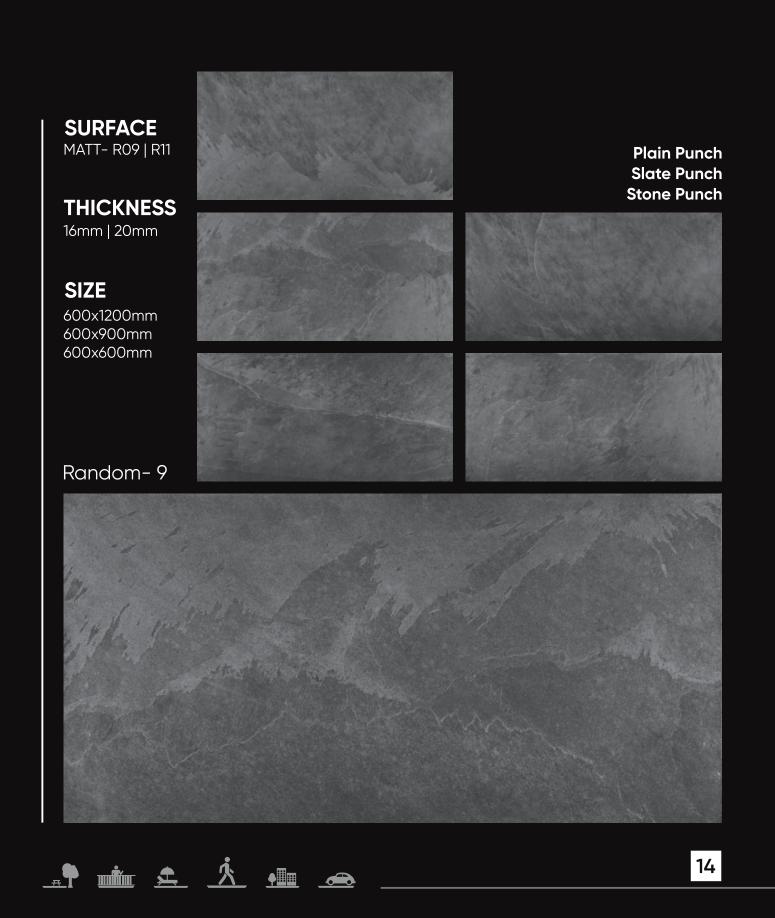


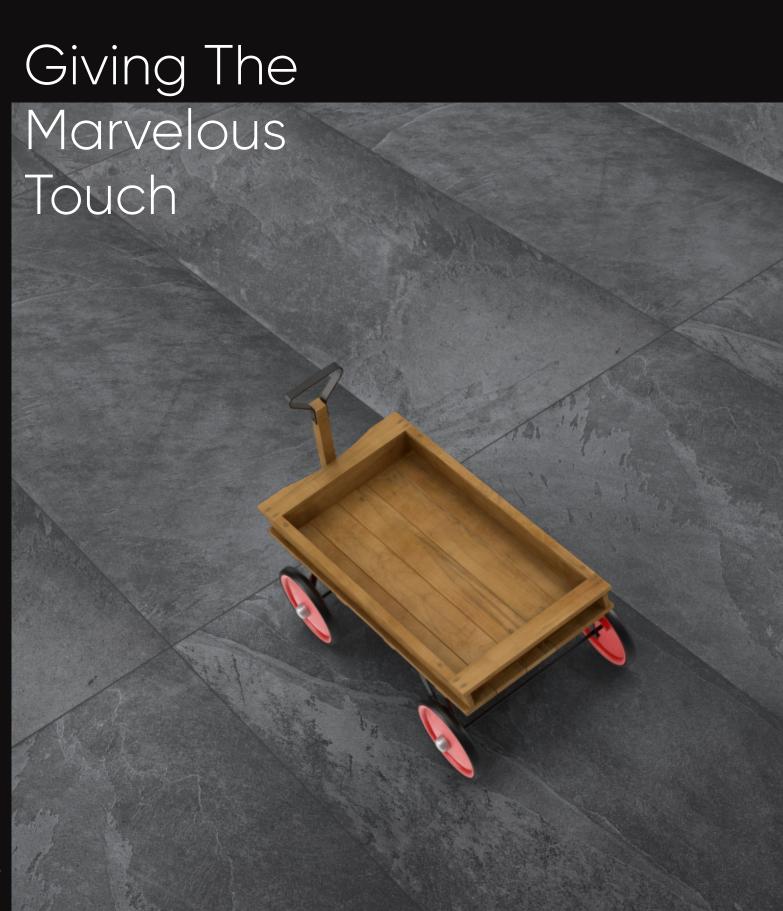



### **CASPIAN IRON**

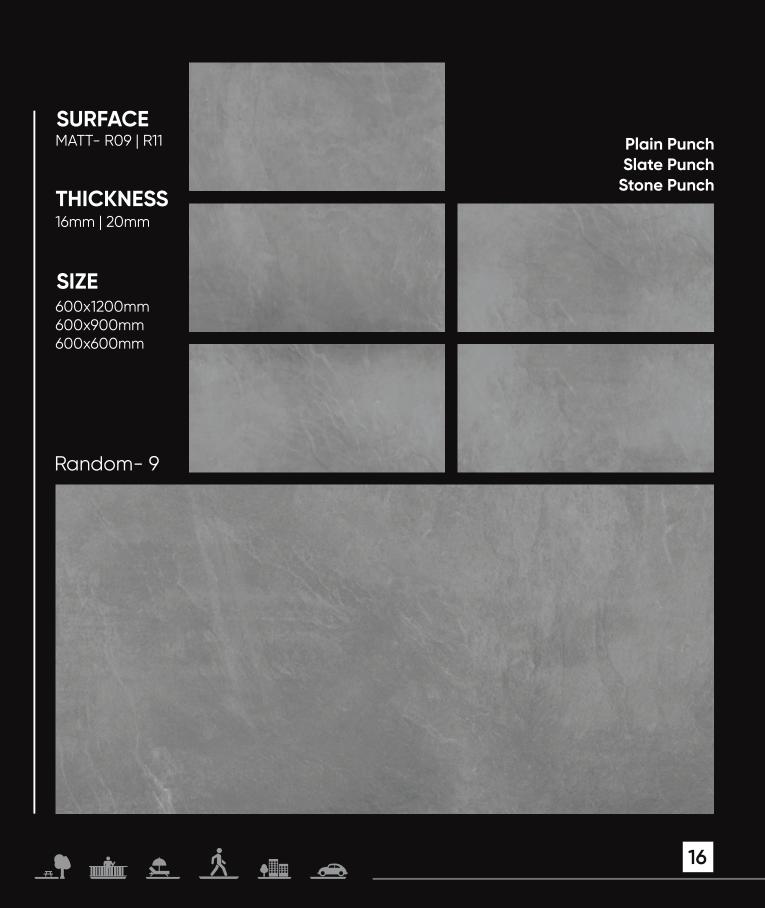

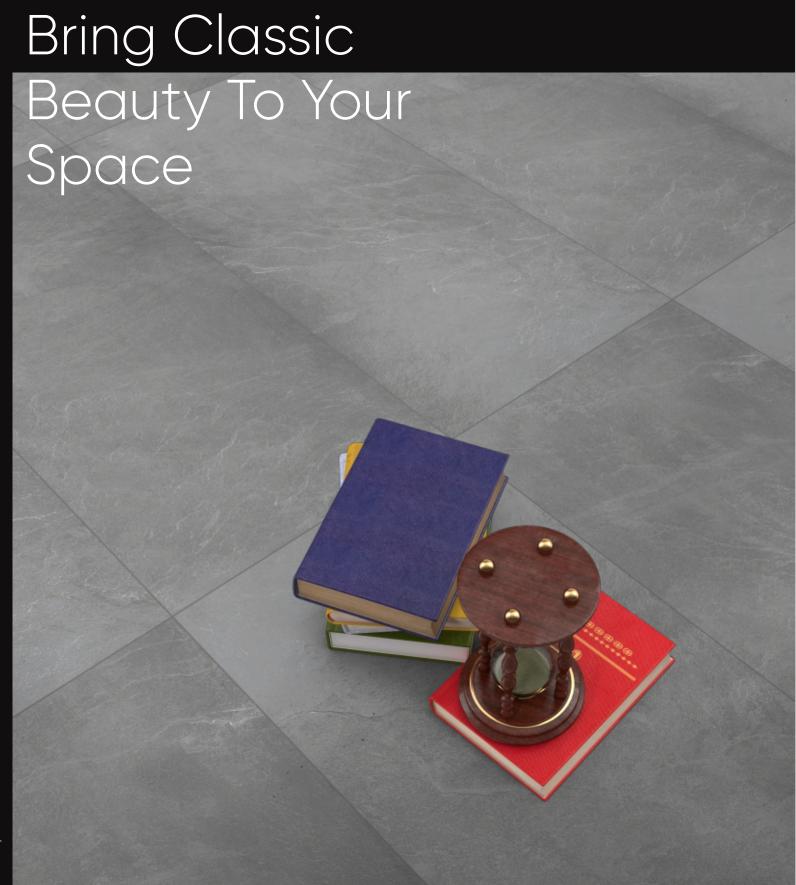




### **CASPIAN PEARL**



# The Impact

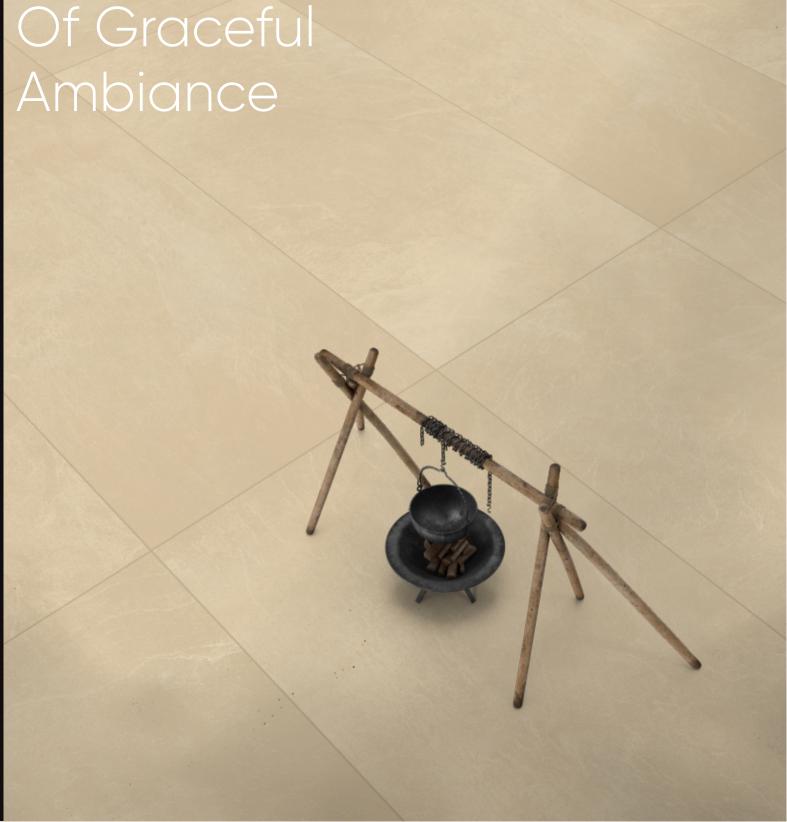



### **CASPIAN WHITE**




# Unmatched






### **COUNTRY ANTHRACITE**



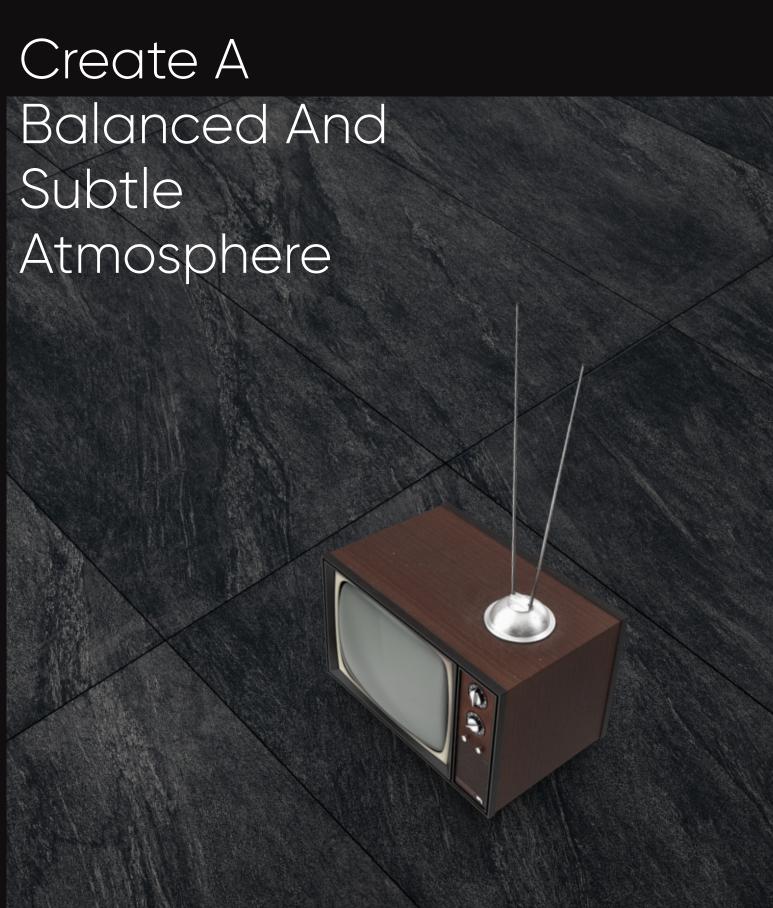



### **COUNTRY CREMA**

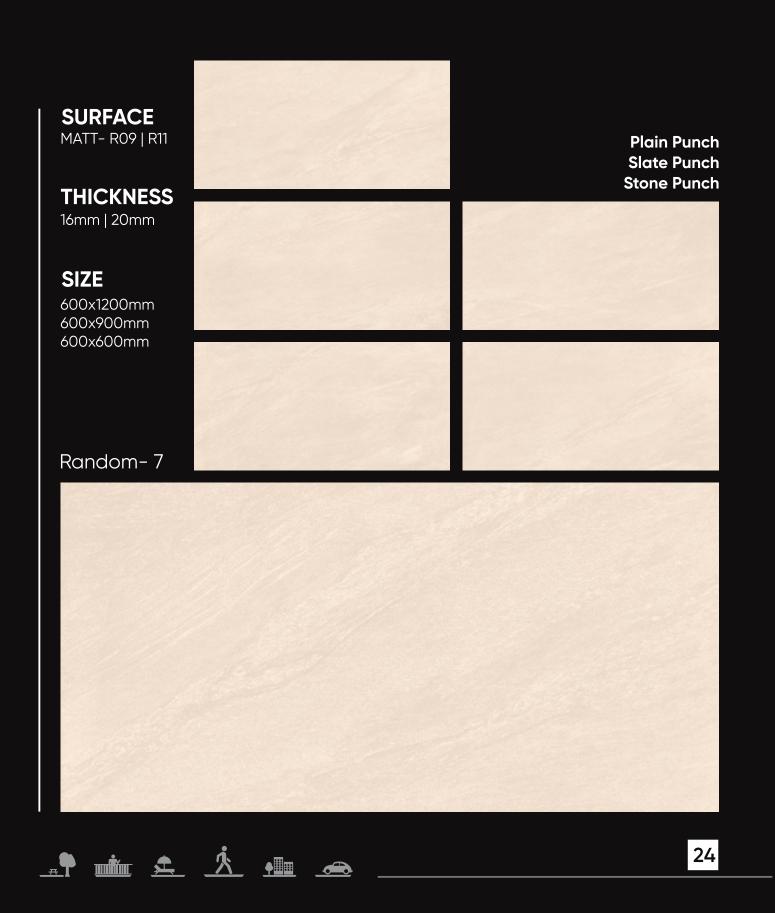

# Creates

Balanced And Minimal Spaces






### **COUNTRY GRIS**




# Aesthetic Charm To The Space



### **COUNTRY LGY**

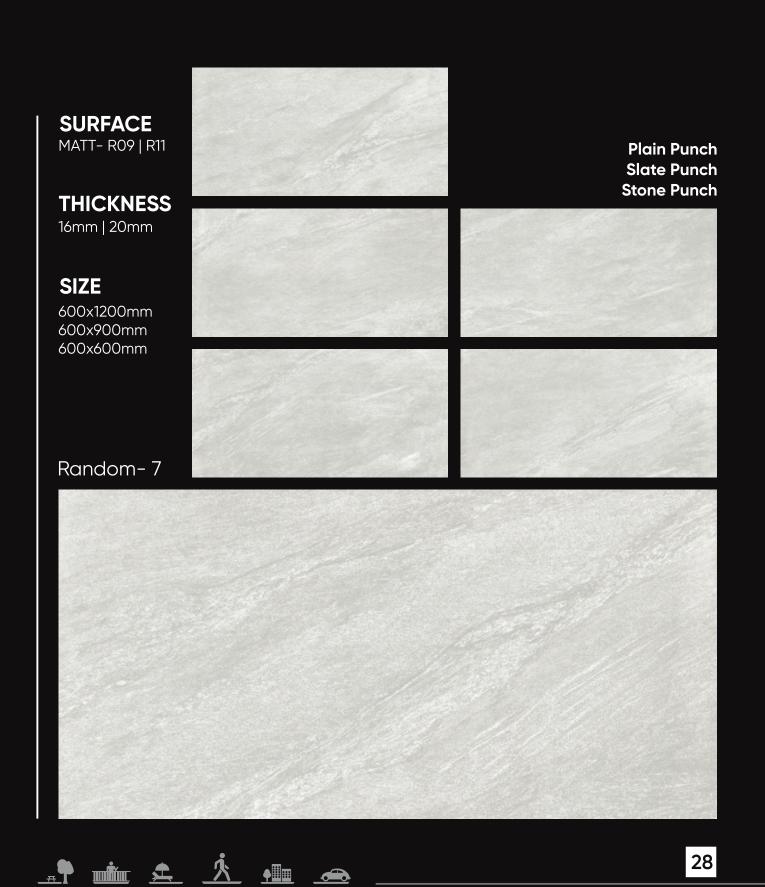


# Give Your

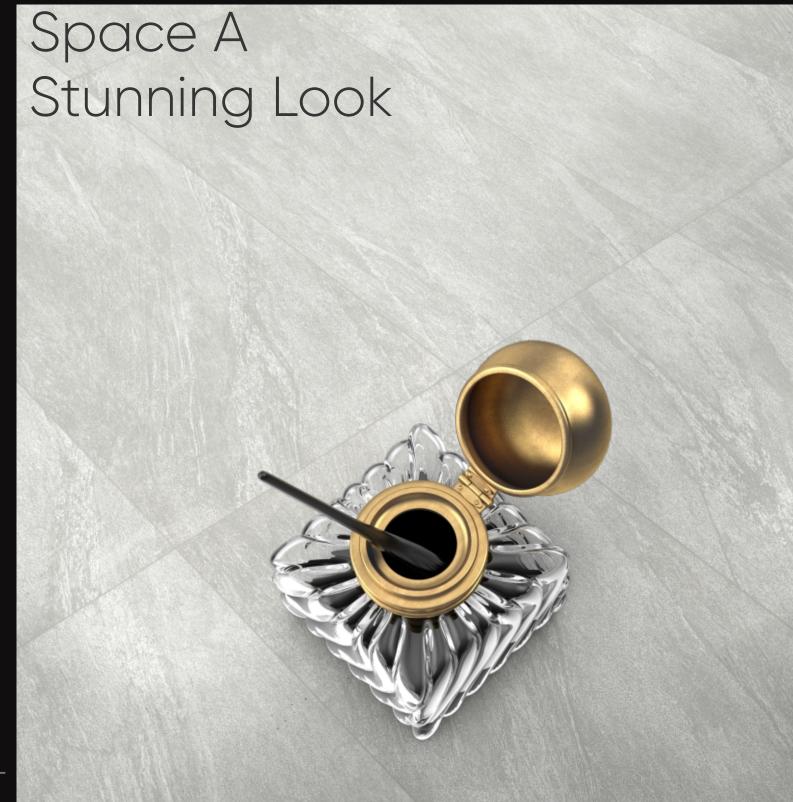



### DEAD SEA



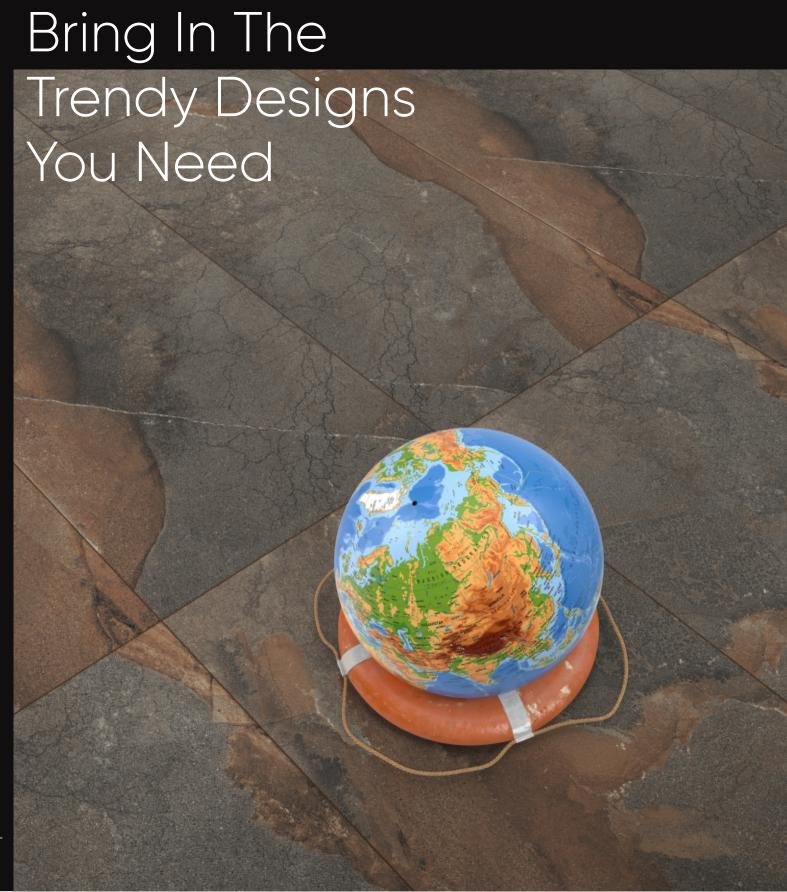




### **ELBRUS**



# Enhance The

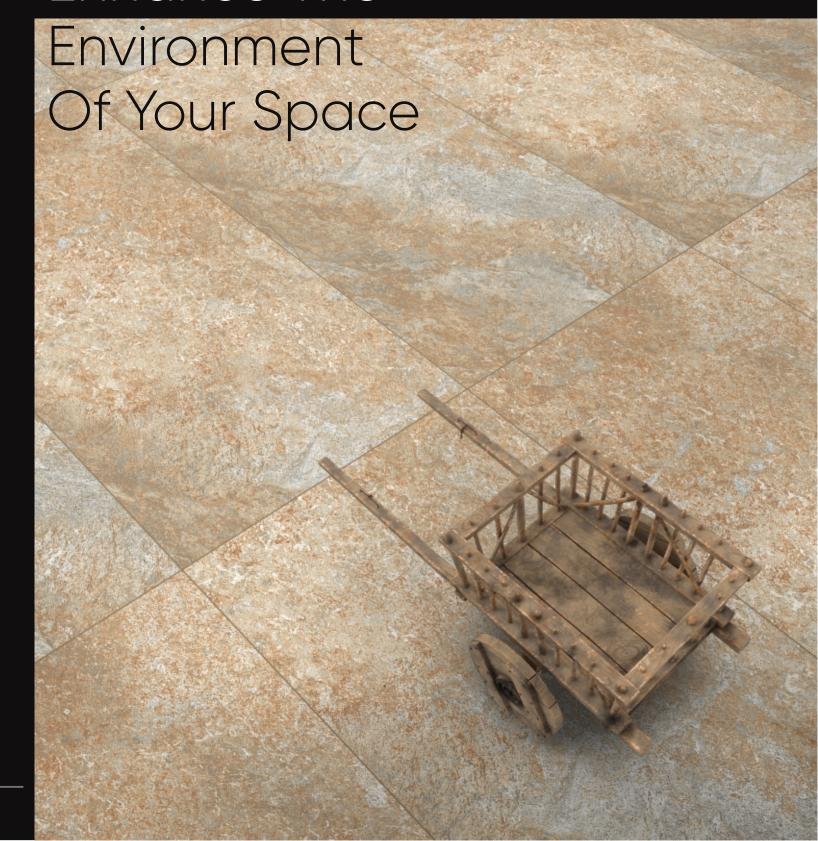







### **ENRICH GREY**



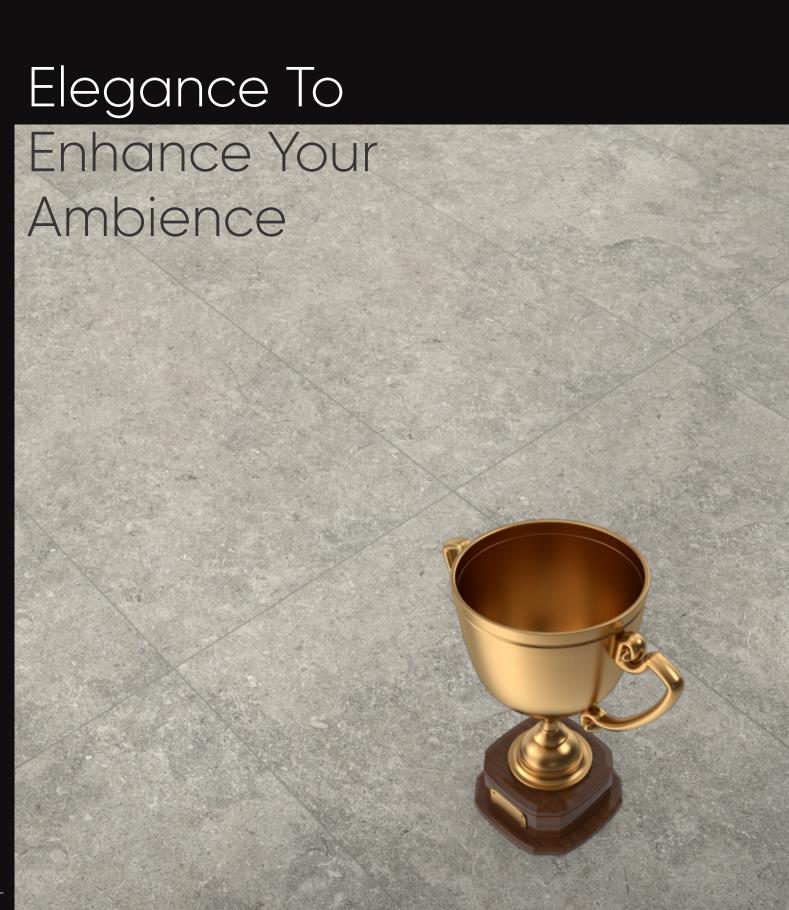



### **FOSSIL MINT**

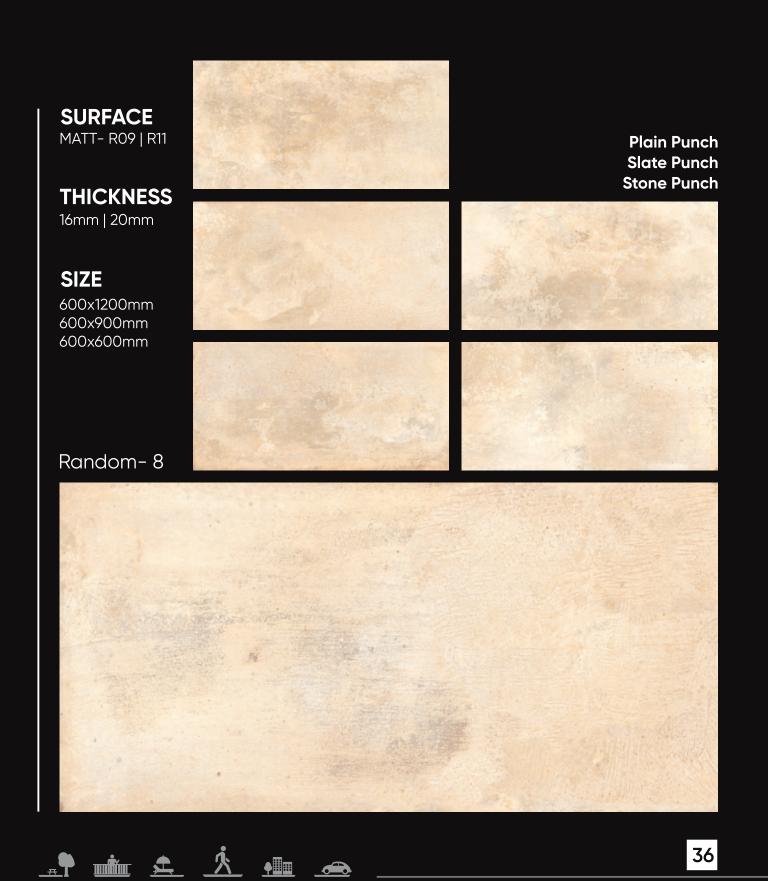


# Explore





### KANDLA GREY

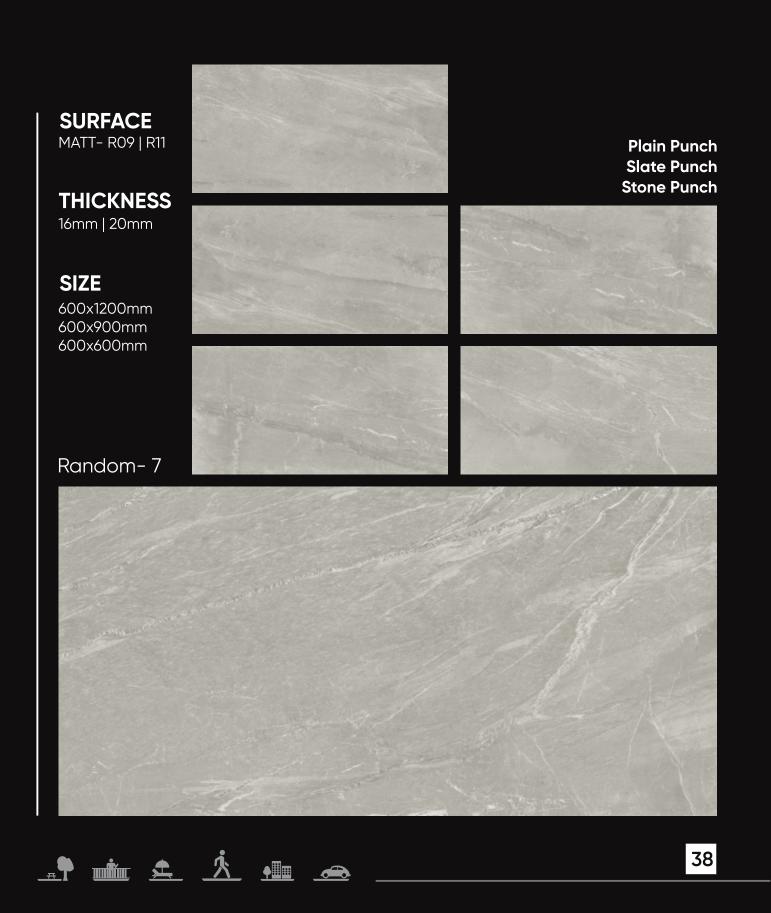


# Precious






## **LI RIVER**

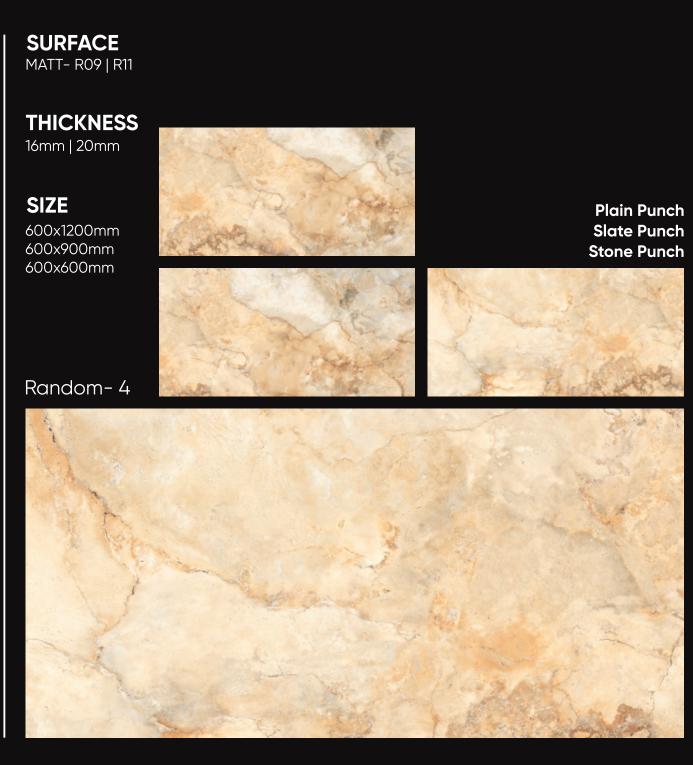

# Make Your

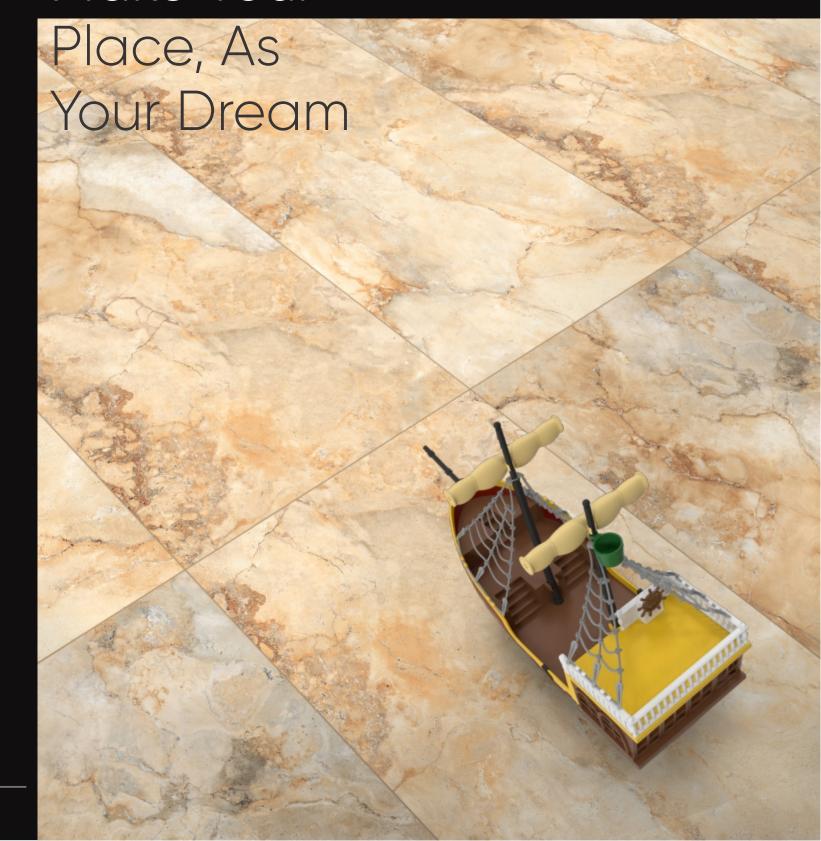




















### MARVEL BIANCO



# Achieve Brilliant

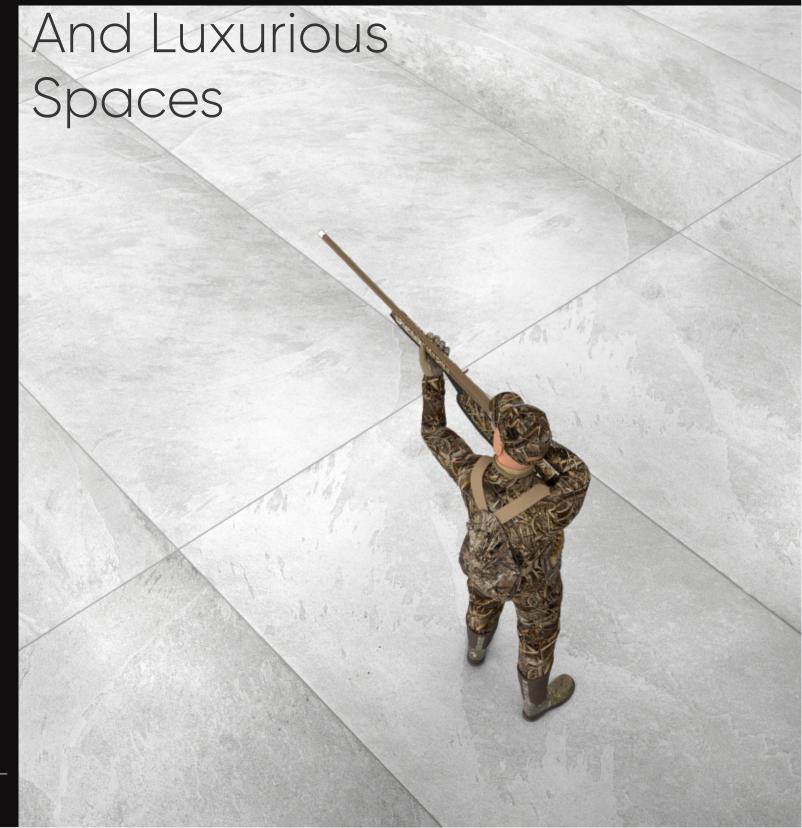



#### MARVEL GREY



# Extraordinary








#### **MARVEL NERO**




# Accentuate The Accents In Your Living Spaces

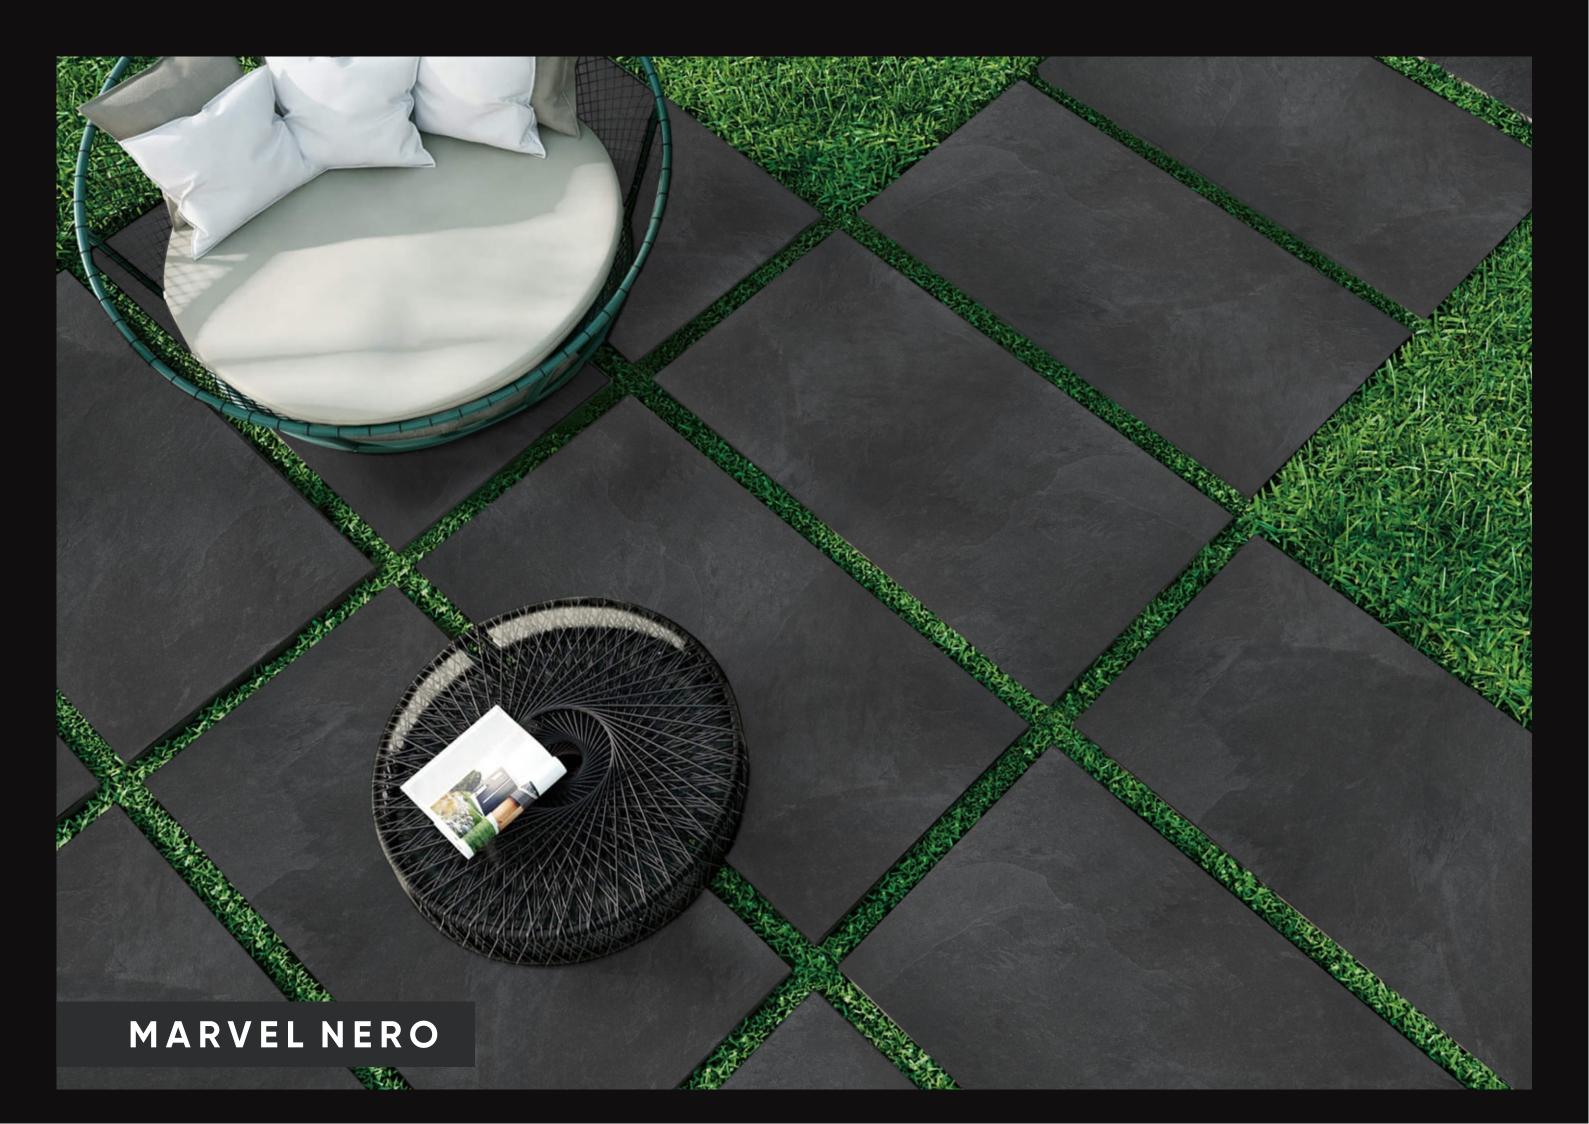

#### MATIRA SNOW



# Carve Your

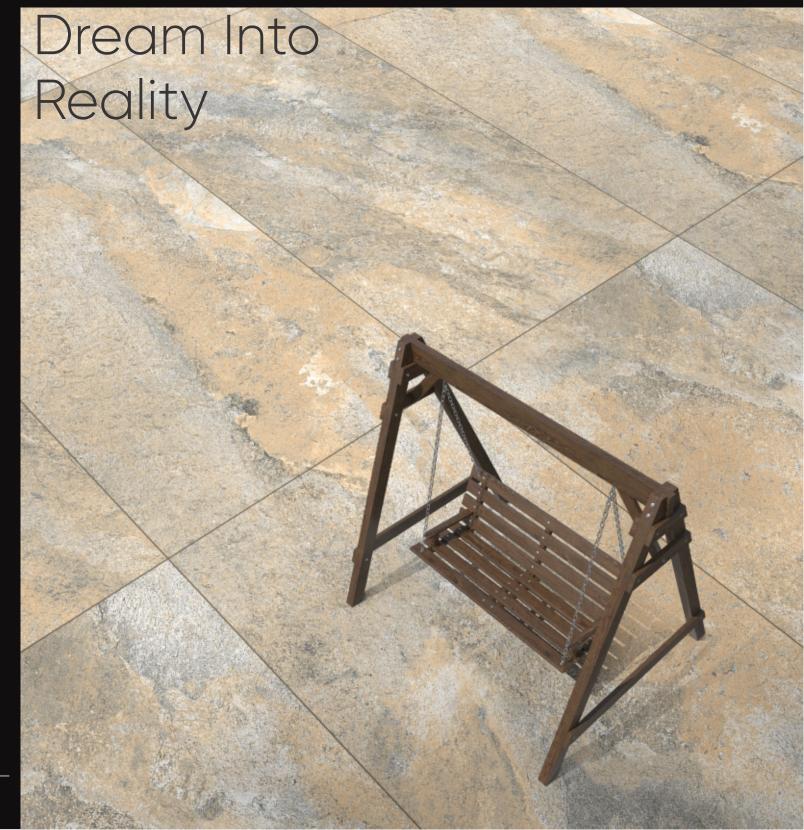





#### **MOUNT KOYA**




# Shades Give

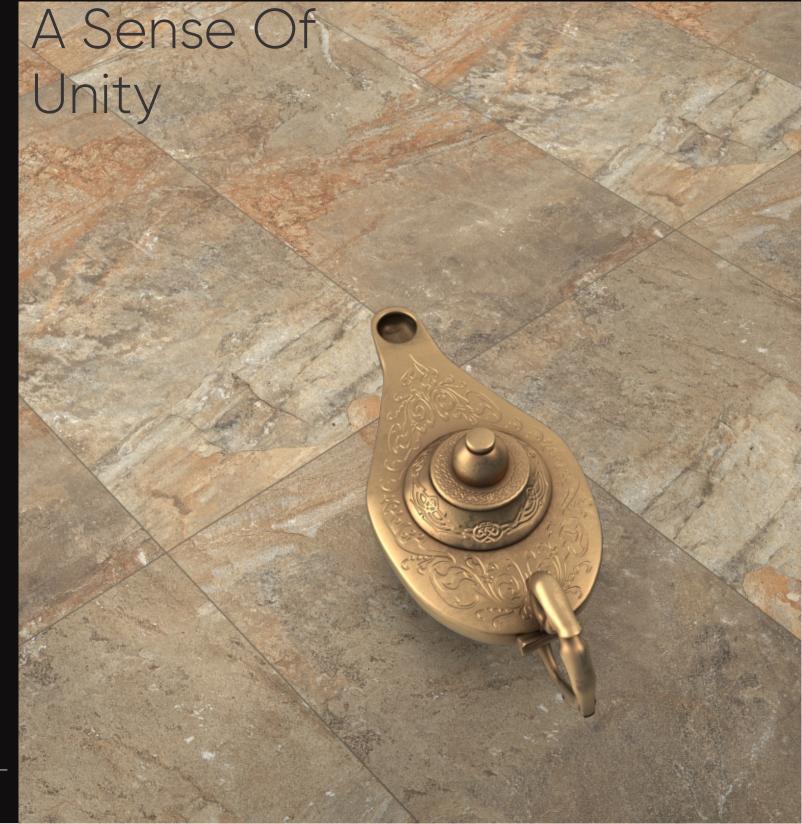

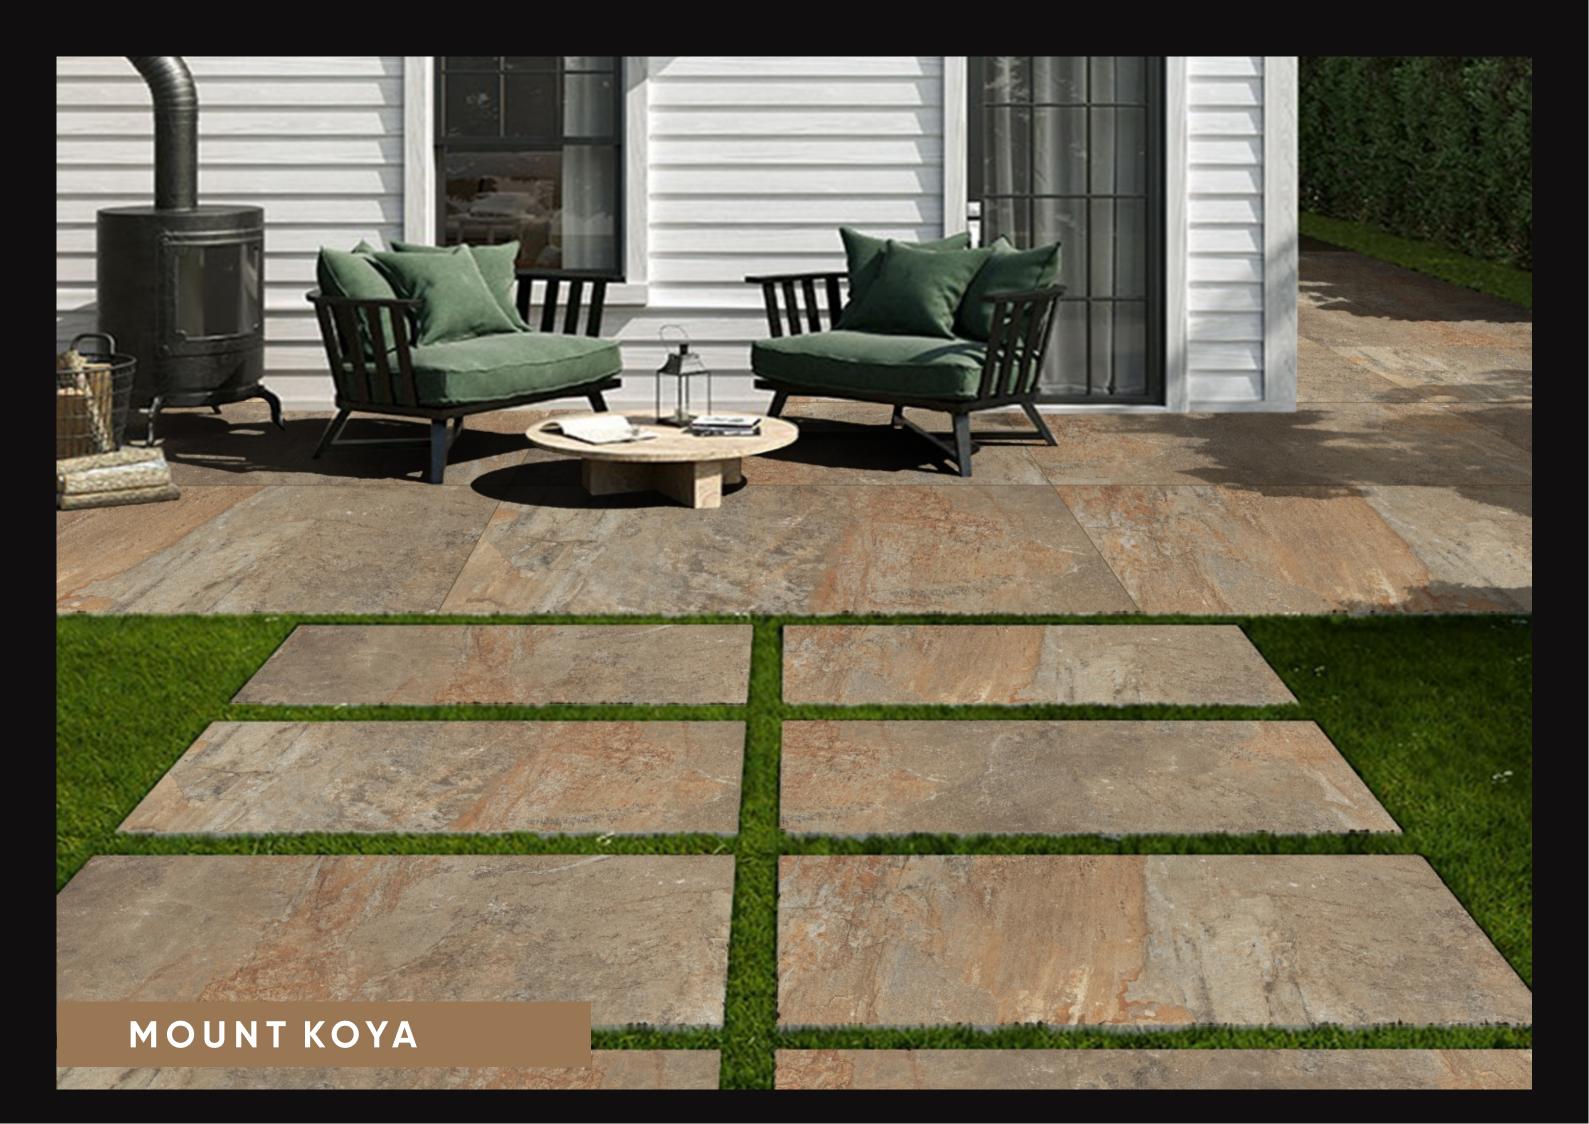


#### MOUNTAIN BLACK

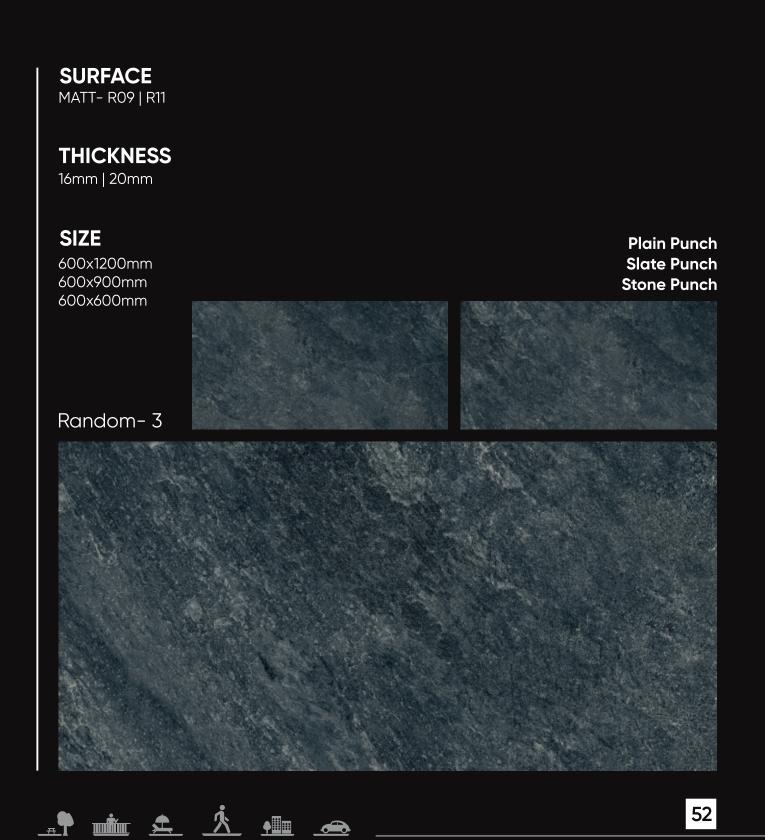





#### **MOUNTAIN GREY**

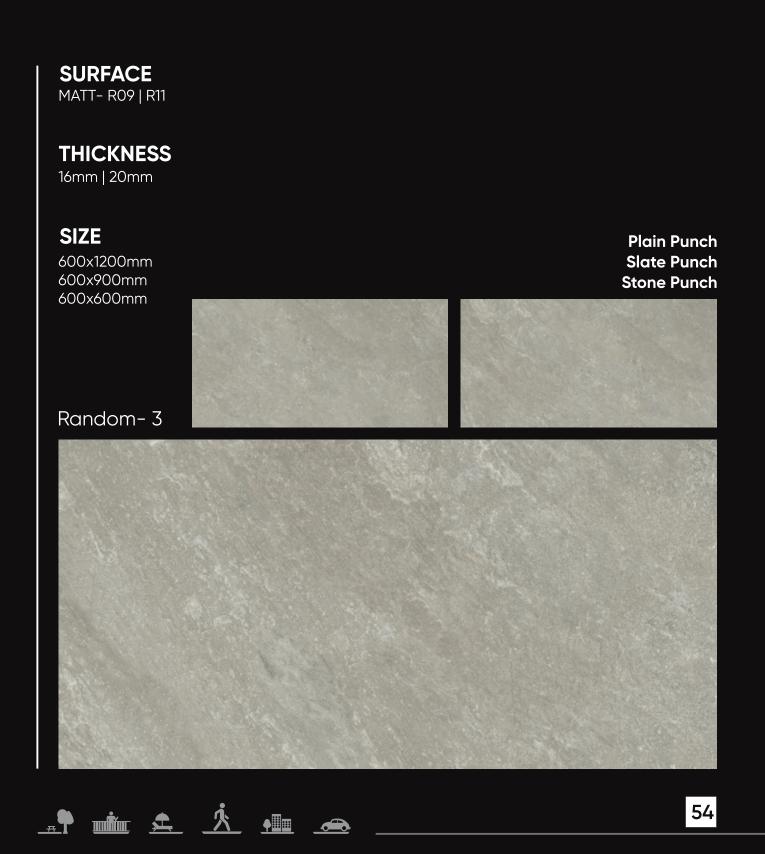

# Transform Your






#### **MOUNTAIN IVORY**




# Achieve Brilliant

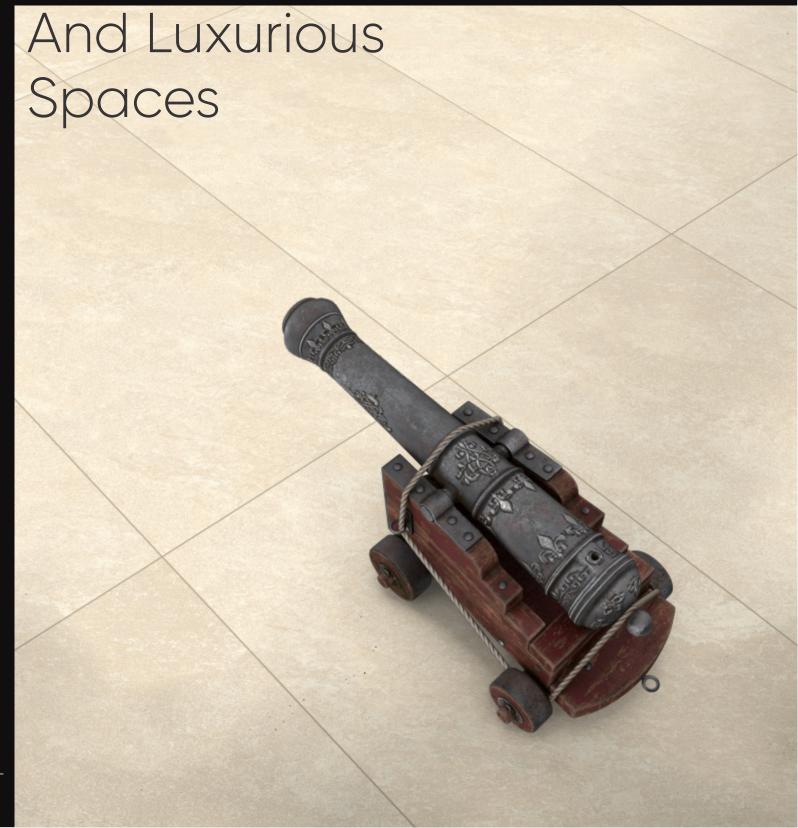




#### PERLINO BEIGE

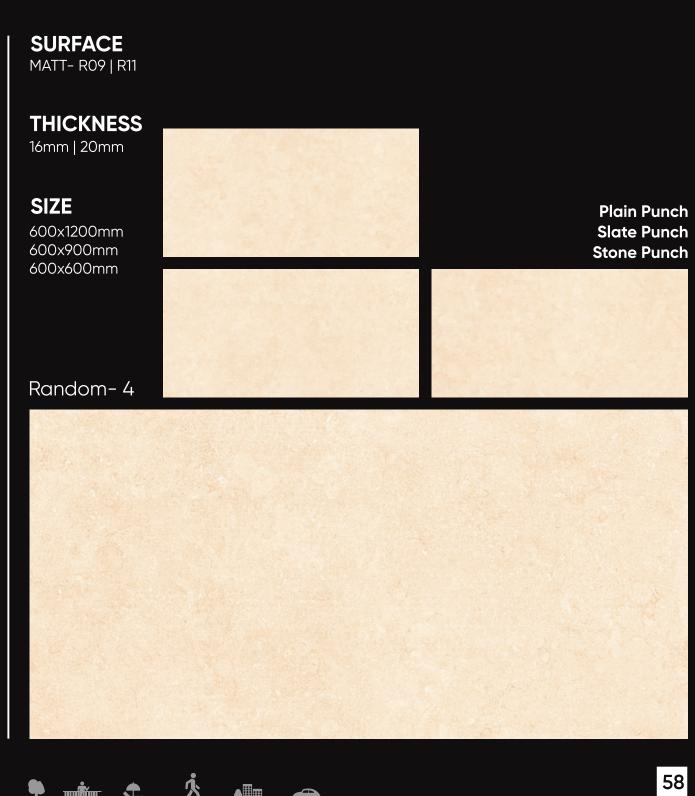

# Elegance To Your

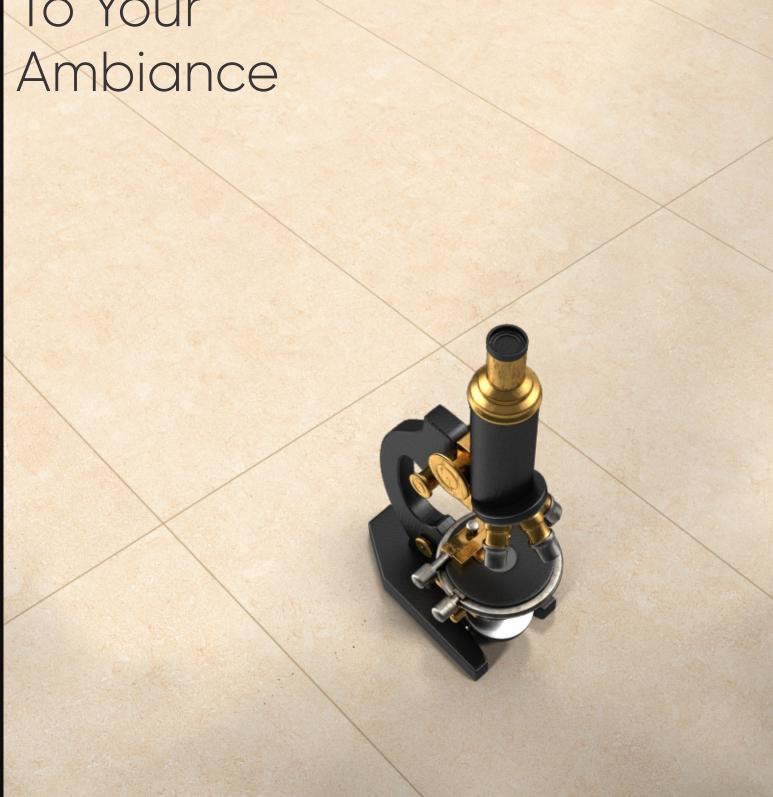





#### **PINE ALMOND**




# Mediterranean Calm To Your Spaces




#### PINE OLIVE



# Adds

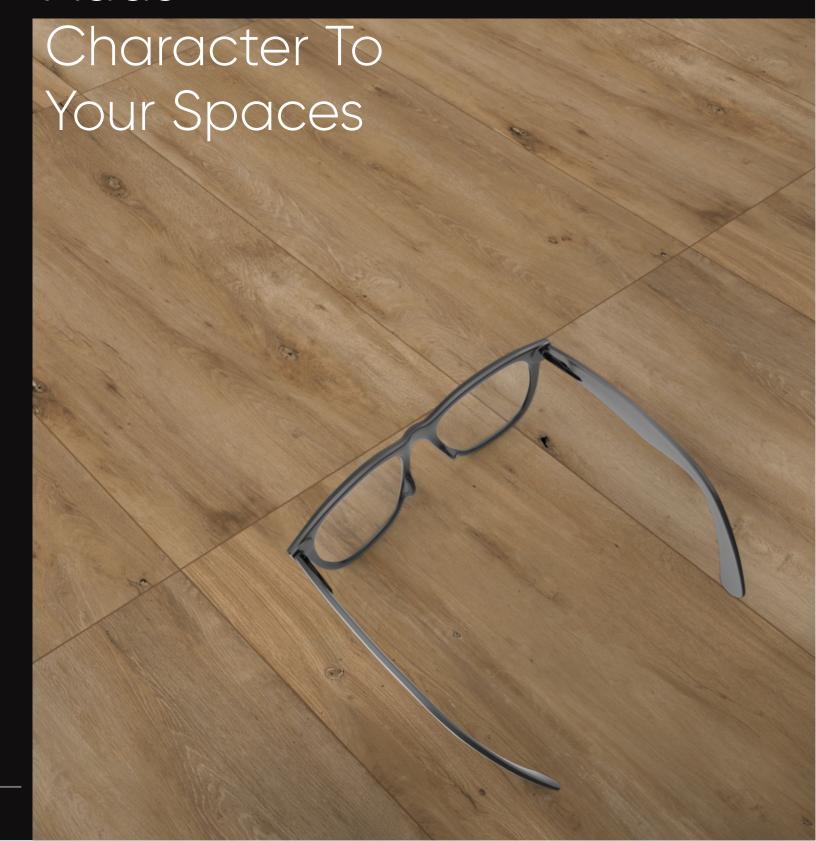

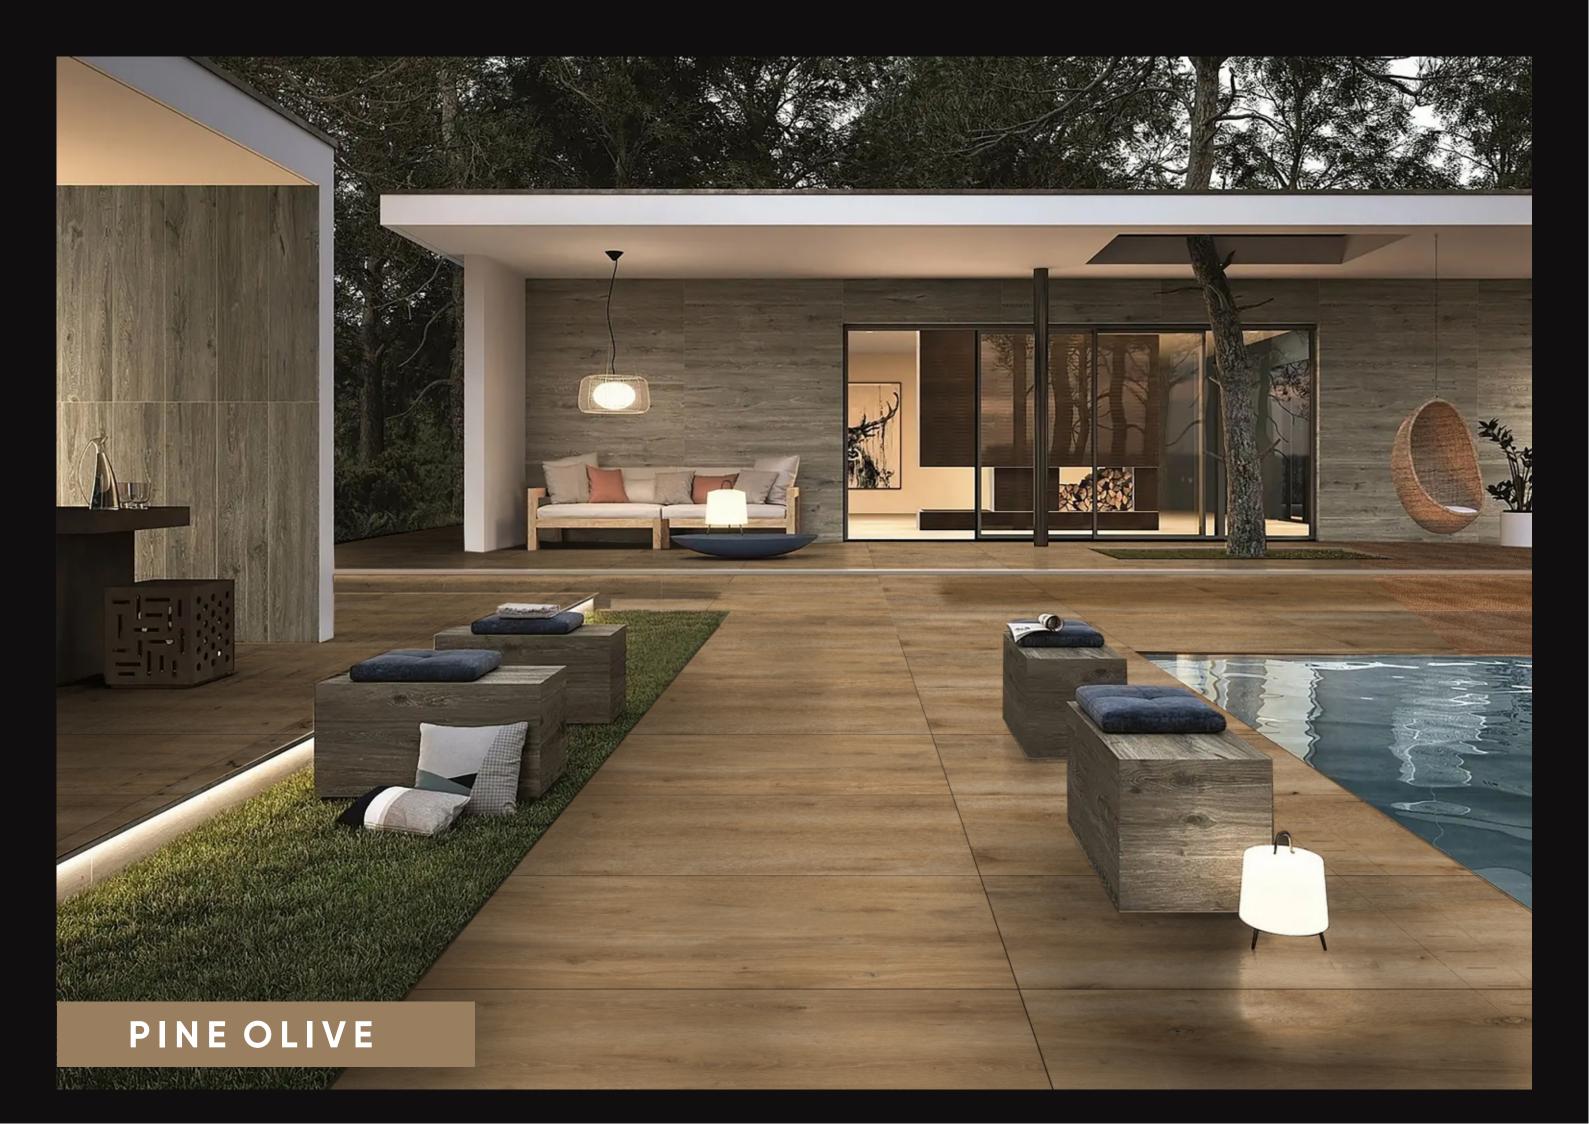

#### POLAR BROWN



# Quirky Charm

To Your Spaces





#### POLAR CREMA







#### POLO BEIGE



# Unstoppable





#### RIVER BLUE




### Sweet Home






#### RIVER GRAPHITE

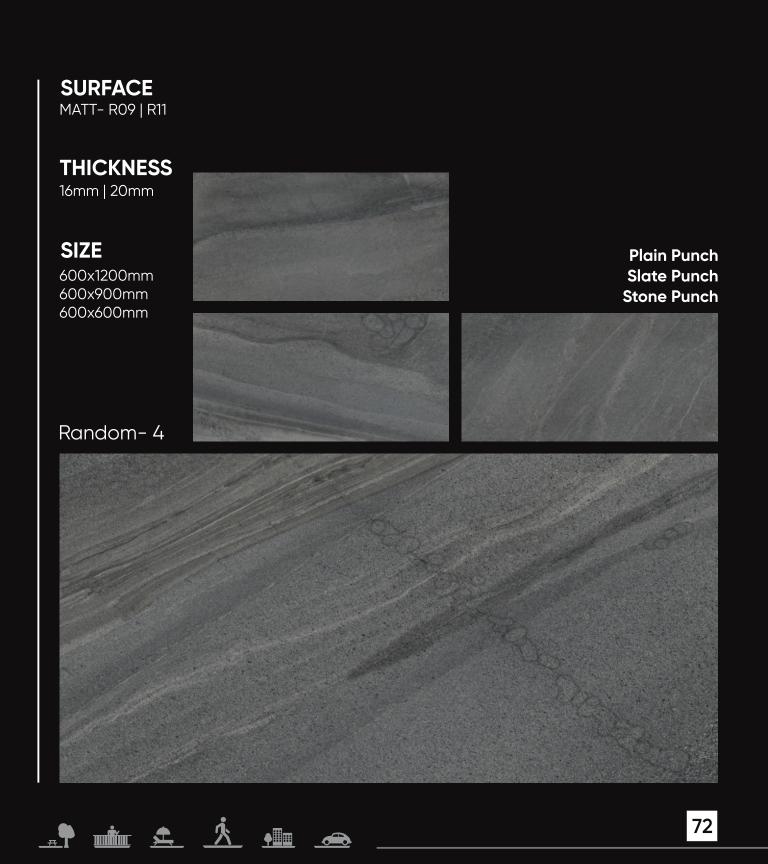

# Create Your Imagination And Beyond The Limitless



#### RIVER GREY

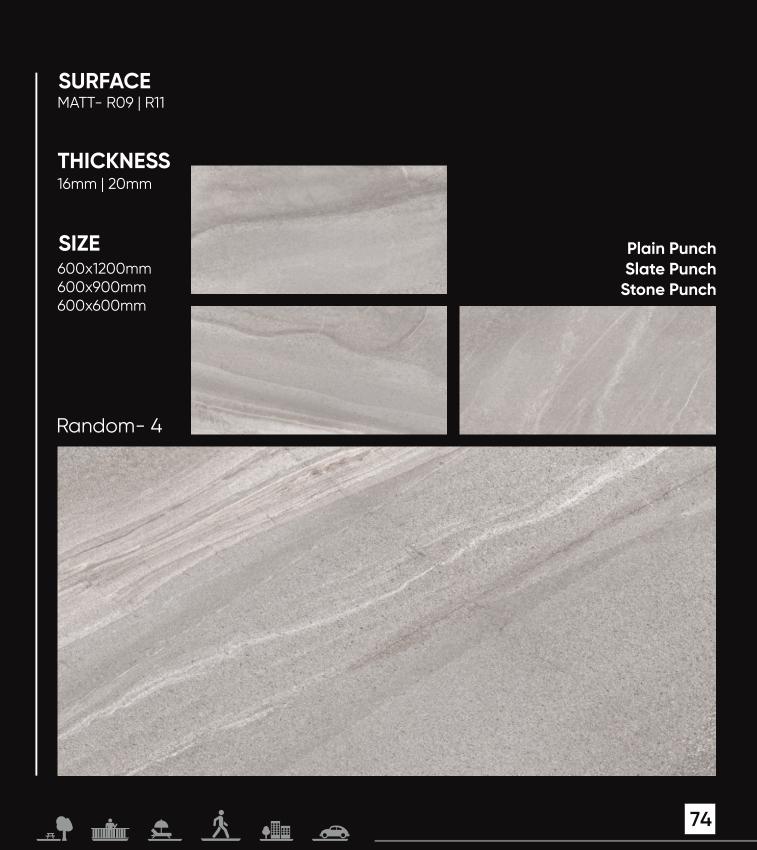

Traditional Design







#### TIMBER WOOD



# The Natural

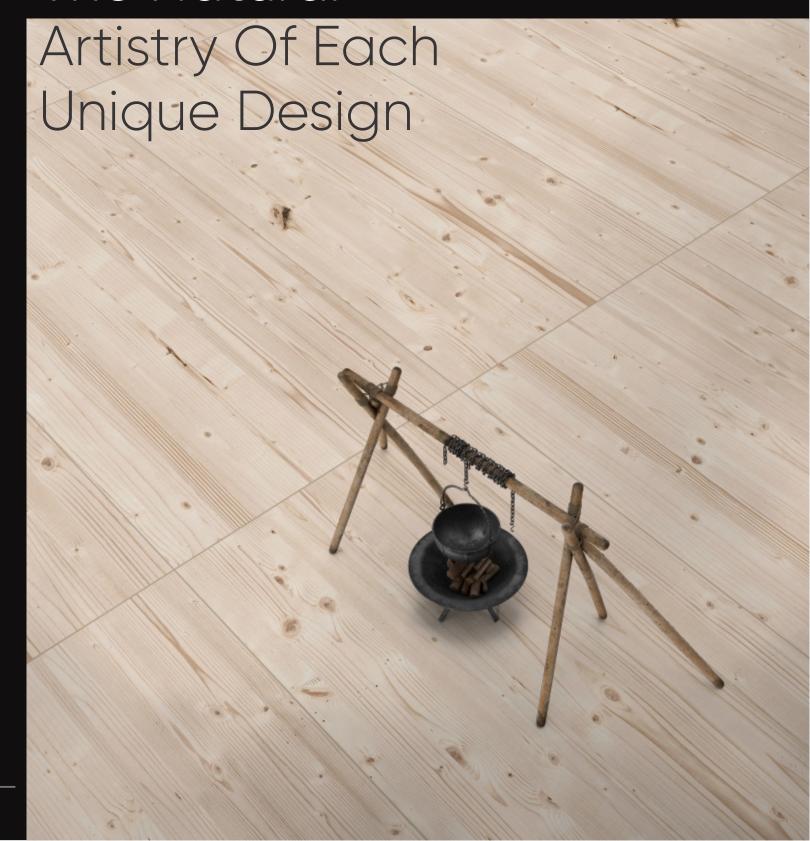

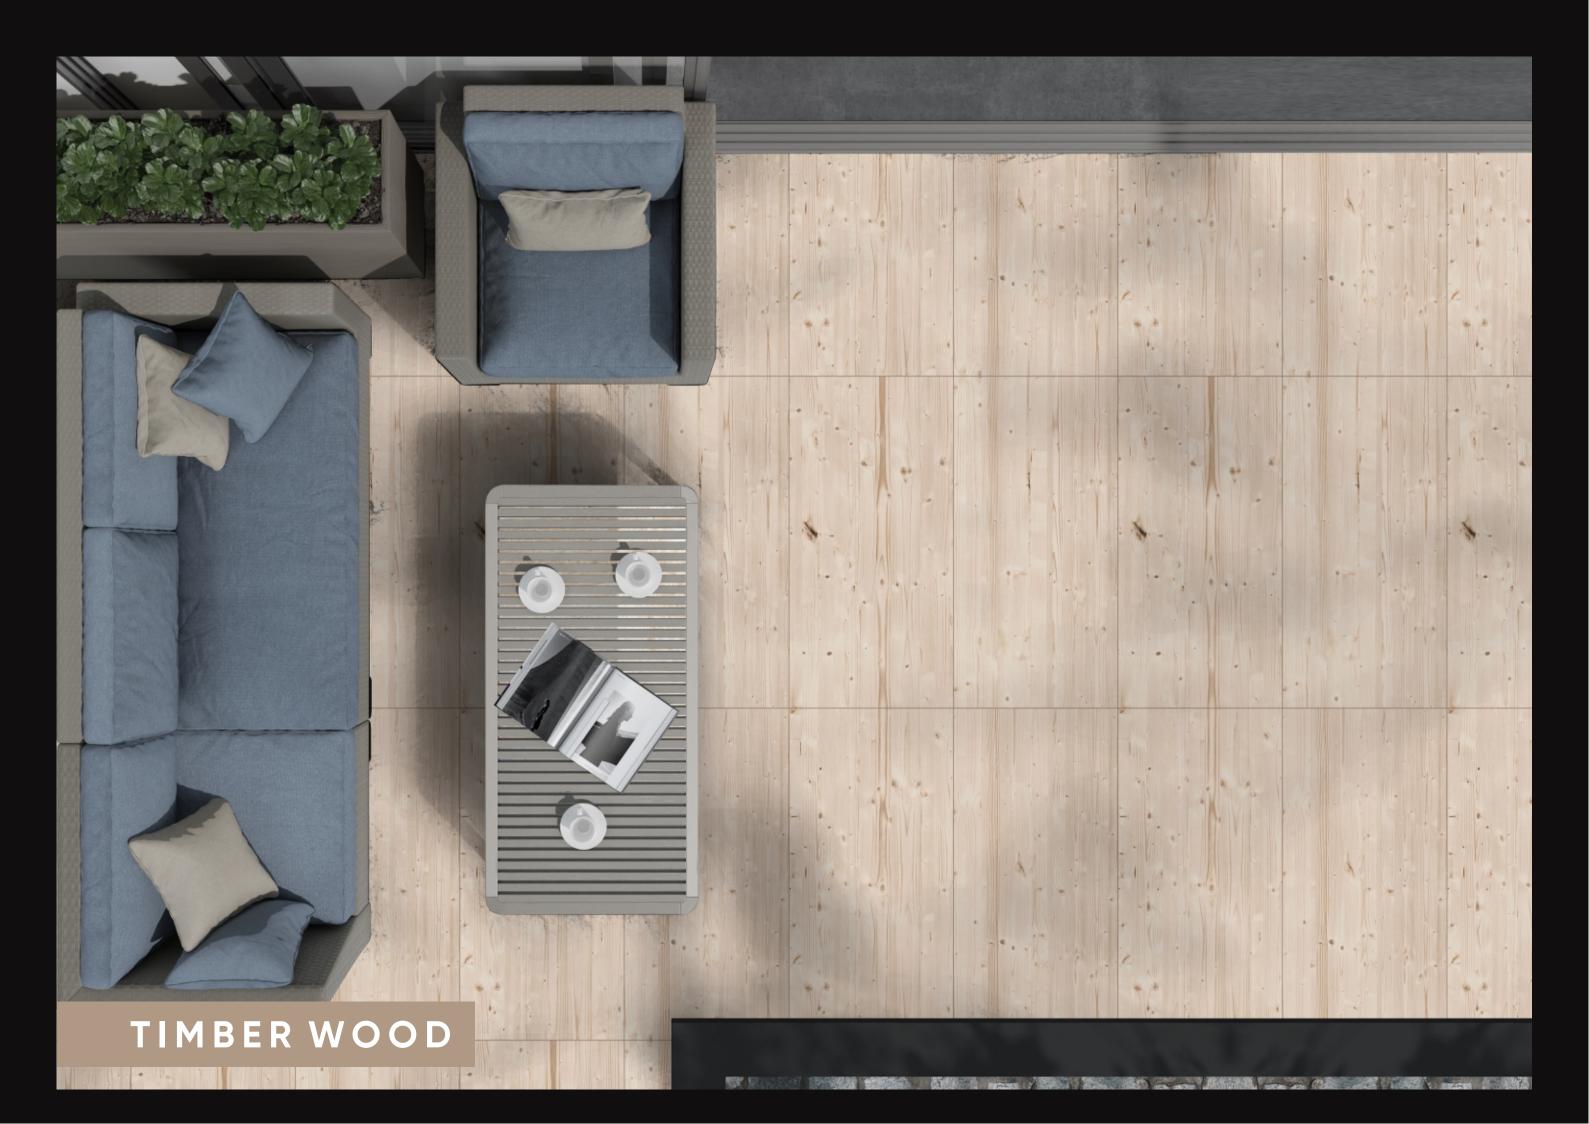


#### **VICTORIA**



Inspiration






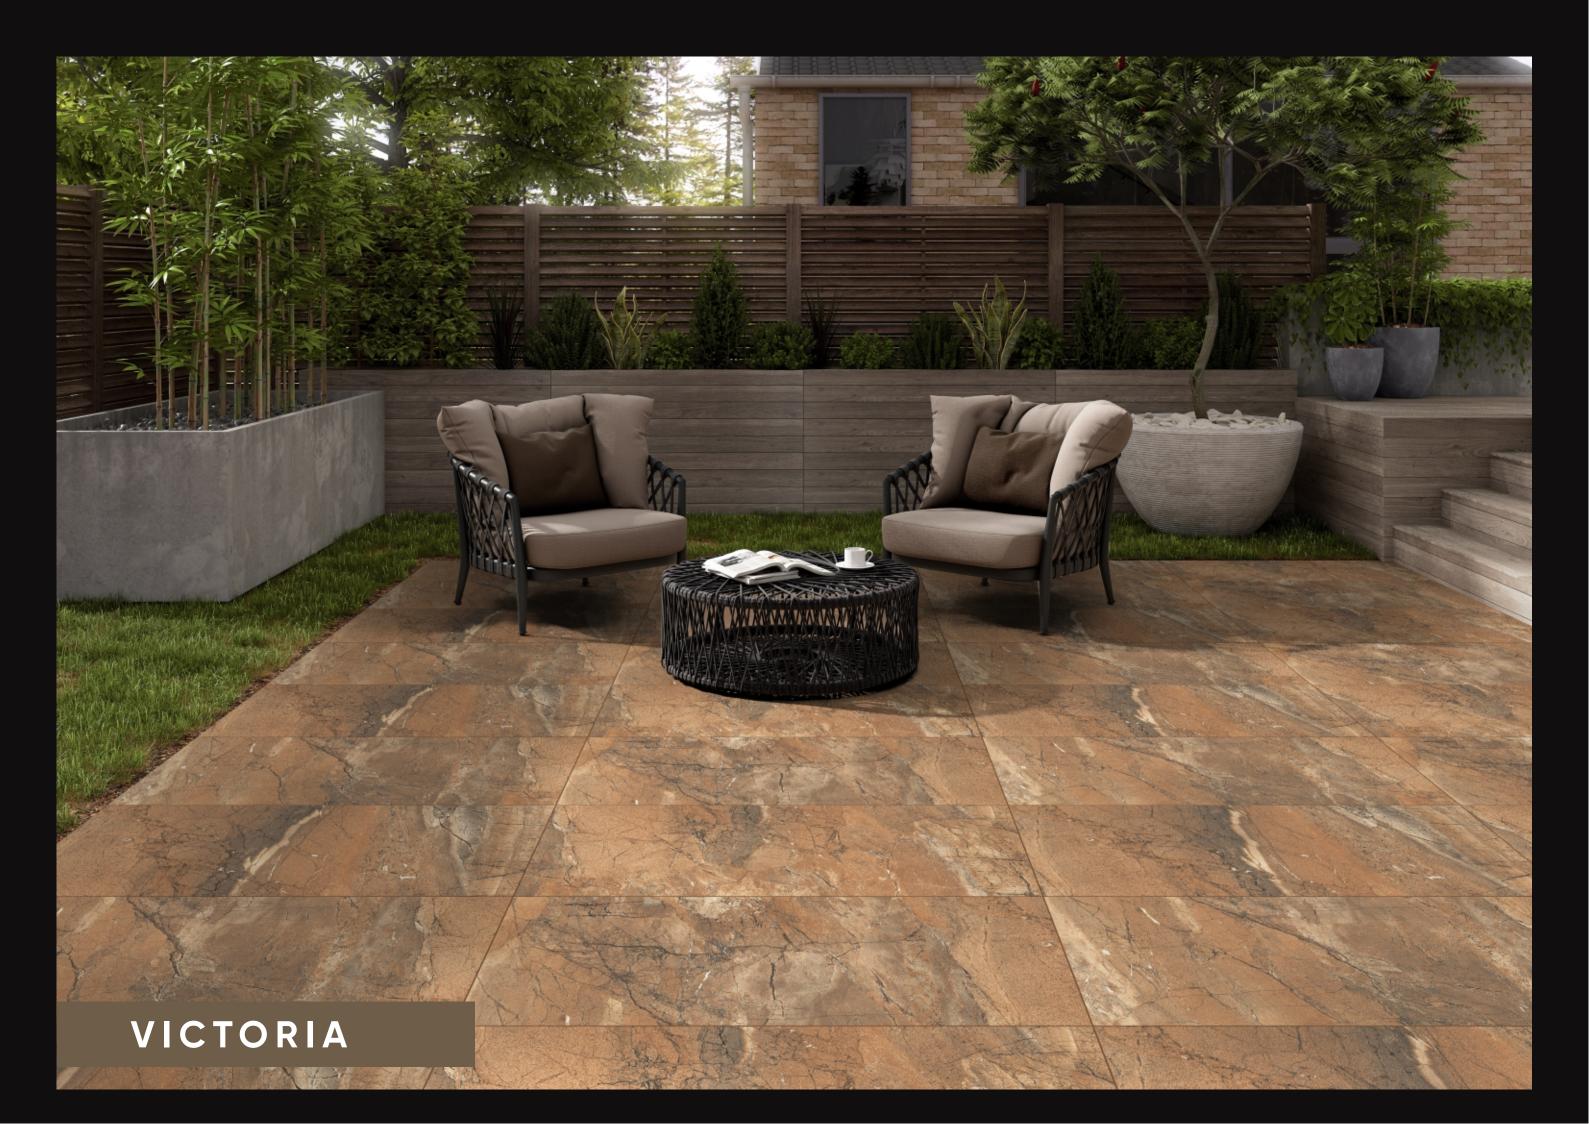

# **VINTAGE ALMOND**



# Design Gives

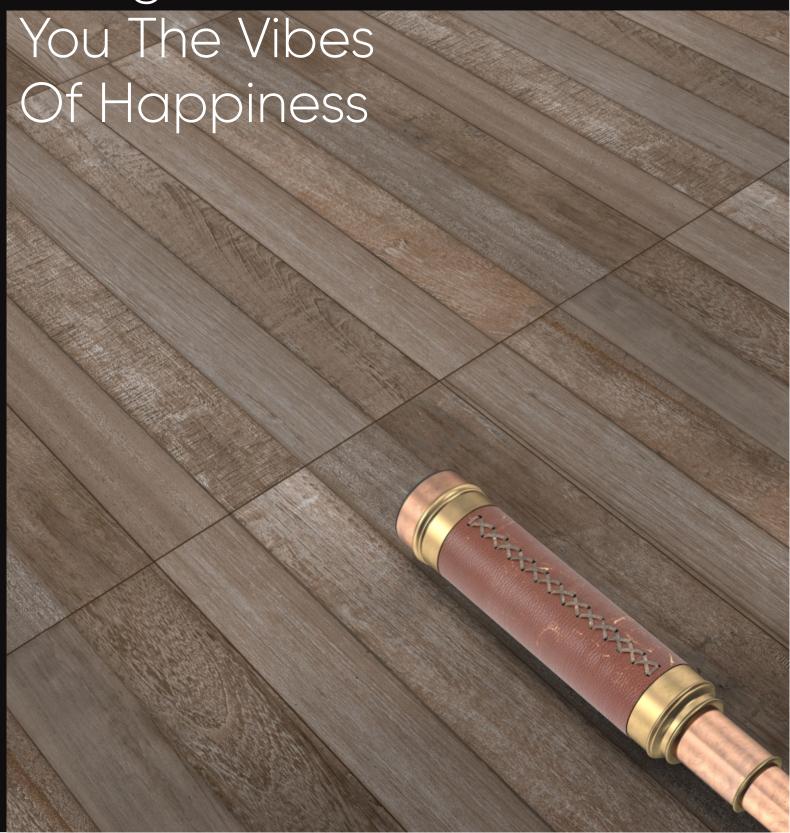






# VINTAGE SMOKE



# Feel Your

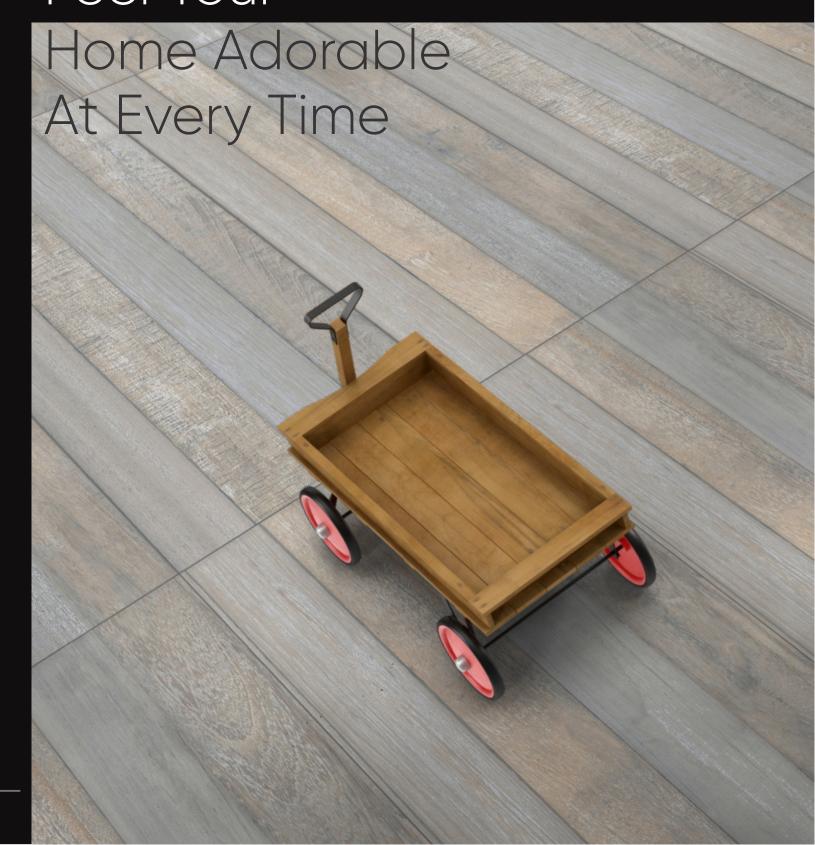






# **ZION BROWN**



# Show Your

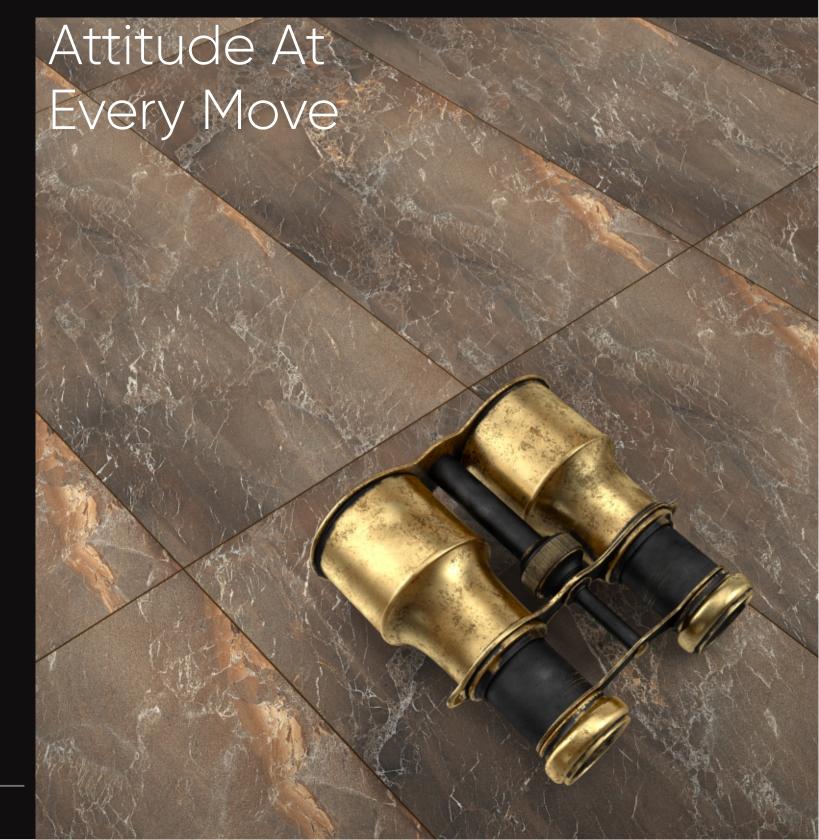

















# METAL SMOKE



# To Be





# OPEC BEIGE



Always Ready





# **OPECIVORY**



# Every Space





#### **PORCELAIN TILES**

# PORCELAIN STONEWARE TILE 20MM FOR OUTDOOR FLOORING

20mm outdoor porcelain stoneware is the product with the highest technical performance, ideal for flooring in an outdoor environment without the risk of breakage and without interrupting the continuity between interior and exterior spaces. Resistant to frost and thermal

shock, it has intensified anti-slip characteristics and is easy to clean. The perfect union between high technical performance and aesthetics helps maintain the material and color unchanged over time, guaranteeing longlasting durability.

## **VERSATILE**



Easy To Lay, Remove And Reuse



Colors Remain

Stable Over Time



Outdoor And Indoor Flooring





Attention To Detail



Can Be Installed With Different Laying Systems

## **RESISTANT**



Frost-Resistant



Fire-proof



Resistant To Stains, Chemical Agents



Resistant To Salt



Resistant To Salt



Highly Resistant To Heavy Load



High Resistance To Thermal Shock

# **FUNCTIONAL**



Non-slip Surfaces Resistant To Vehicular Passage



**ECO-FRIENDLY** 

## **ECO-FRIENDLY**



Eco-friendly


Leed Compliant




# PORCELAIN STONEWARE TILE 20MM FOR OUTDOOR FLOORING

Owing to the possibility of installing it dry (on grass, sand, gravel, and elevated floors) the 20mm porcelain outdoor tile collection is the most versatile solution for exterior floors in residential and public areas.

> **OUTDOOR PORCELAIN TILES**







2 SWIMMING POOLS, SPAS AND ADJOINING AREAS



(3) URBAN FURNITURE **AND PUBLIC PLACES** 



4 HIGH-TRAFFIC INDUSTRIAL ZONES



(6) TERRACES AND



7 CAR PARKS AND DRIVEWAY AREAS



OTHER APPLICATION **SOLUTIONS** 


#### **PORCELAIN TILES**

# LAYING SOLUTIONS

Outdoor Porcelain 20mm Tiles Are An Innovative Solution That Is Very Versatile Due To The Numerous Laying Possibilities They Offer: Dry Installation On Grass, Gravel, Or Sand, Screed With Adhesive, And Elevated Floor Installation.

#### DRY INSTALLATION ON GRASS





Easy to lay, adjust, and move. An ideal solution for public parks and private gardens

# INSTALLATION ON SCREED WITH ADHESIVE




Build resilient and durable outdoor spaces, pathways, driveways, and more with the installation of 20mm tiles on screed with adhesive.

#### DRY INSTALLATION ON GRAVEL / SAND



B



Easy to lay, adjust, and move. Boasts ideal aesthetic features to enhance contemporary buildings.

#### **ELEVATED FLOOR INSTALLATION**





Easily removable, inspectible, and reusable. Ideal to be

Easily removable, inspectible, and reusable. Ideal to be applied with different kinds of support and is apt for concealing wiring pipes, and more with accessibility.

### CAUTION

- $When \ carrying \ out \ an \ elevated \ floor \ in stallation \ it \ is \ recommended \ to \ check \ the \ intended \ use \ and \ to \ follow \ the \ in stallation \ in structions.$
- It is recommended that the designer/client always check the suitability of the installation system selected according to local regulations in force.

# DRY INSTALLATION ON GRASS

To create a pathway with stepping stones, first of all, it is important to determine the number of steps necessary for the entire path, making sure that the tiles are positioned equidistantly. So as to obtain maximum stability, it is recommended to dig out about 5/8cm from the soil, and then place a fine layer of gravel. Compact the substrate and then position the tile. To allow the turf to grow well, it is advisable to leave a gap of at least 10cm between one tile and another.

## **RESISTANT**










It Is Good Practice To Lay The Surface Of The Tiles In Line With The Turf: This Way There Is No Risk Of Damaging The Lawn Mowers


SAFE AND STABLE


LONG-LASTING

EASY TO CLEAN

DRAINS

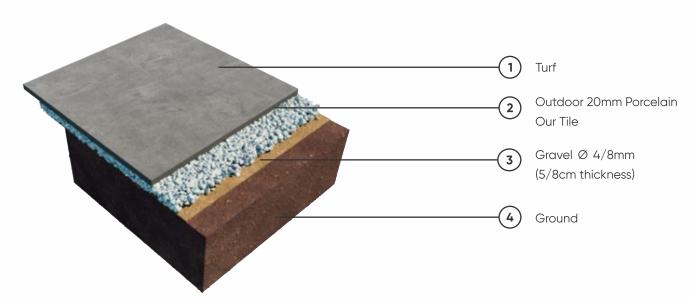







Remove the turf and dig out about 5cm of soil. Form a stable and uniform substrate using fine gravel (grain size 4/8mm).



Lay the tile, so as to have an approximately 0.5cm level difference, between the tile and the ground. To simplify tile installation it is possible to use suitable tile installation handles. Knock the tile along the edges with a rubber hammer until it is at the same level as the turf


## CAUTION -


The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring.

### **PORCELAIN TILES**

# DRY INSTALLATION ON GRAVEL / SAND

For installation on sand it is good to remember to place a geotextile on the gravel, on which to spread out a layer (from 2 to 5cm thick) of dry sand with a grain size of 0/2mm. It is necessary to compact the sand with a vibro-compacting plate before proceeding with the installation of the tiles. For particular uses and for stressful loads, it is advisable to consult a technician in order to calculate precisely the thicknesses of the various layers of the substrate.

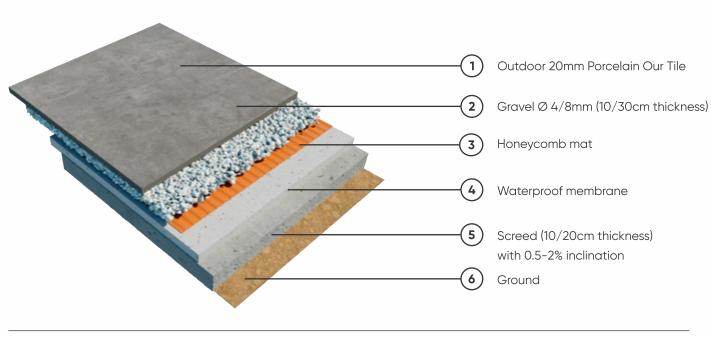

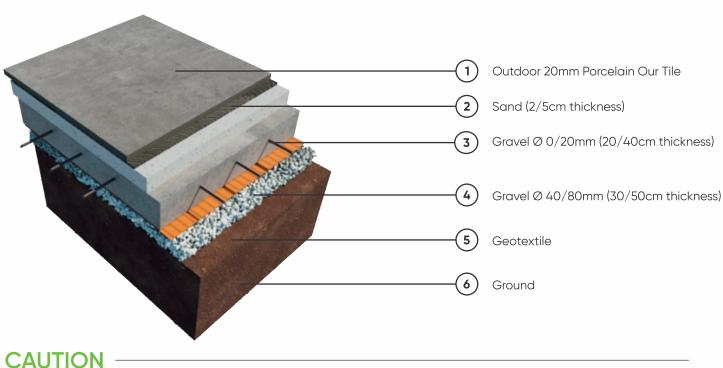

The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor

# DRY INSTALLATION ON GRAVEL / SAND


In Order To Avoid The Displacement Of The Substrate And Consequently The Tiles, The Substrate Must Be Partitioned With Containment Edges Or Perimeter Curbs.



Form a stable and uniform substrate using fine gravel or sand. Level the substrate with a metal straight edge.



Position the tile and then compact the edges in order to level the tile with the substrate. It is suggested to use a joint of at least 4mm to allow good water drainage.

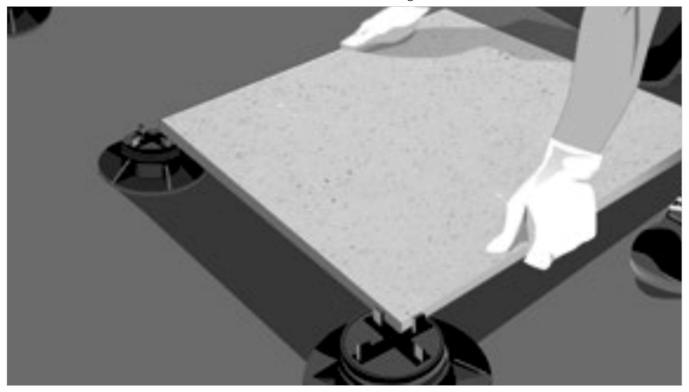


Spacers designed for laying tiles on sand or gravel are an extremely versatile and practical system despite their simplicity. The support is made up of a head with a spacer cross and a removable tip: the fins of the head cross help position the tiles and create the joint between them, ensuring that over time the flooring maintains its correct positioning. The tip is specific for application on sand: the elongated shape guarantees the anchorage and stability of the tiles, preventing them from slipping. For use on gravel, it is possible to remove the tip and place the spacer head directly on the gravel.

### **PORCELAIN TILES**

# **ELEVATED FLOOR INSTALLATION**

The elevated floor technology offers many specific and immediately perceivable advantages: it allows the passage of cables, pipes and necessary installations to be managed easily; it enables the underfloor to be inspected easily and guarantees an effective draining of Rainwater. Thanks to the presence of independent elements, elevated floors absorb expansion and structural movements, thus avoiding the formation of cracks on the waterproof embrane. The absence of the screed makes it possible to substantially reduce the weight that burdens the structures, while offering a high resistance to loads.

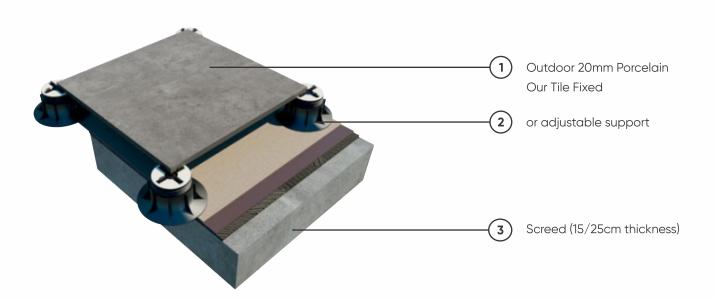

For The Optimal Drainage Of Rainwater, The Elevated Flooring Must Be Installed With A Slope Of Between 1.5% And 2%.



The installation on the plastic supports must only been done on perfectly waterproof substrates. Before proceeding with the installation clean the substrate thoroughly.



With regard to the number and position of the supports, as well as the type of reinforcement on the back of the slab, it is recommended to follow the instructions given in the following table, which are essential to evenly distribute the load.



With the use of the special adjustment key it is possible to obtain a perfectly stable surface and with the required slope for better water drainage.


## CAUTION -

The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor.

## **ELEVATED FLOOR INSTALLATION - SUPPORTS**

## Fixed supports and self-levelling adjustable supports

The structure of the supports consists of a base (which rests on the slab), a central screw adjustable in height and a head (on which the tile rests) which can be fixed or self-levelling with a self-adjustment system to alter inclination by up to  $5^{\circ}$ .

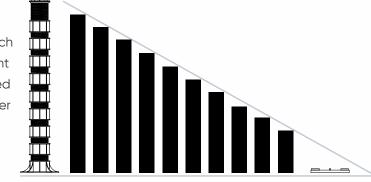



They are made entirely of recycled and recyclable material



Resistant to both acidic and alkaline solutions



Resistant to both acidic and alkaline solutions



Resistant to temperatures of between -30 °C and +120°C



Made of polypropylene




Resistant to the crushing test with a load superior to 1




Noise reduction of up to 25dB




Possibility of using supports made with self-extinguishing material, which prevents the propagation of flames



#### Format 60x90cm






Format 60x90cm

## **PORCELAIN TILES**


# **SPECIAL ELEMENTS**

In order to guarantee excellent aesthetics and functionality for the various possible applications, the 20mm outdoor porcelain Our tile collections have a rich set of step elements and special pieces.

- 1 Stair tile with straight edge
- (2) Stair tile with rounded edge
- 3 Stair tile with straight ribbed edge
- (4) Stair tile with rounded ribbed edge
- 5) Right corner piece with straight edge
- (6) Right corner grid
- (7) Left corner grid

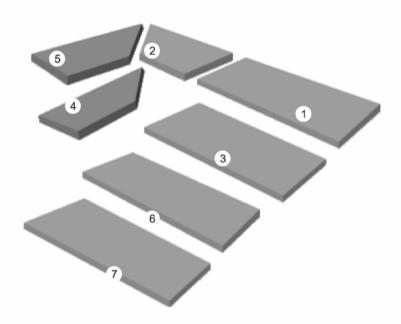


#### STAIR TILE WITH STRAIGHT EDGE




- 1) Stair tile with straight edge
- (2) Stair tile with rounded edge
- (3) Adhesiv
- (4) Screed
- (5) Flooring
- 6 Grid
- 7 Swimming pool covering

#### STAIR TILE WITH ROUNDED EDGE



#### **SWIMMING POOL EDGE**



# CAUTION —

The images are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor.

### **TECHNICAL DETAILS**

TEST DESCRIPTION	ISO-13006/EN176 GROUP BIA	MEAN VALUE OF OUR	TEST METHOD	
Length & width	±0.6 %	±0.3mm	Passed	
thickness	±5 %	±0.3mm	Passed	
Straightness of side	±0.5 %	±0.3 %	Passed	
Rectangularity	±0.6 %	±0.3 %	Passed	
Surface flatness	±0.5 %	+0.35mm to -0.1mm	Passed	
Surface quality	Minimum 95 %	Minimum 95 %	Passed	
Water absorption	< 0.5 %	< 0.04 %	Passed	
Breaking strength	> 1300N	> 1500N	Passed	
Flexural strength (Average)	> 35N/mm <sup>2</sup>	> 40N/mm²	Passed	
Scratch hardess of surface (Moh's scale)	> 6	>6	Passed	
Resistance to deep abrasion	<175mm <sup>3</sup>	<144mm³	Passed	
Skid Resistance (Friction coefficient)	>0.4	>0.4	Passed	
Bulk Density, in (g/cc)	>2	>2	Passed	
Linear Thermal expansion	Max. 9.0 <sup>-4</sup> x K <sup>-6</sup> , Max	Max. 9.0 <sup>-6</sup> x K <sup>-6</sup> , Max	Passed	
Thermal shock resistance	No damage	No damage	Passed	
Frost resistance	Frost proof	Frost proof	Passed	
Resistance to Chemical	Resistance	Resistance	Passed	
Resistance to Stain	Resistant	Resistant	Passed	
Moisture expansion	Nil	Nil	Passed	
Colour resistance	Resistant	Resistant	Passed	
Glossiness (Polished)	_	2	Passed	

#### PACKING DETAILS (OUTDOOR):-

SIZE	BOX WEIGHT	PCS/BOX	SQM/BOX	SQFT/BOX	BOX/PALLET	PALLET/CTN	BOXES/CTN	TOTAL SQM/CTN	CTN WEIGHT (KG)
600x1200mm ( 20mm )	32.5	1	0.72	7.75	30	28	840	604.8	28000
600x900mm ( 20mm )	24.5	1	0.54	5.81	40	28	1120	604.8	28000
600X600 ( 20mm )	32	2	0.72	7.75	36	24	864	622.08	28000
600x1200mm ( 16mm )	25.5	1	0.72	7.75	70 & 34	12 & 7	1078	776.16	28000
600x900mm ( 16mm )	2	2	9	:21	=	Œ	· ·	14	J <u>e</u> j
600X600mm (16mm)	25.5	2	0.72	7.75	40	27	1080	777.6	28000

The information contained in this catalogue is a accurate as possible, but cannot be considered as legally binging. The Company reserves the right to make ant modification that become necessary due to production requirements. Weight colors and dimensions are subject to the inevitable variation typical of the ceramic firing process. the colors are possible to the actual colors, within the limits allowed by the printing process. for technical printing reasons, the colors shown may slight differ from the actual tiles. VITRIFIED RESERVES THE RIGHT TO MODIFY THETECHNICAL INFORMATION QUOTED IN THIS CATALOGUE.



# Your Ceramica

contact@yourceramica.com www.yourceramica.com +919979604896