

W W W . Y O U R C E R A M I C A . C O M





SHAPING BEAUTY, PERFECTING SPACES

OUR MISSION IS TO SHAPE THE BEAUTY OF NATURE INTO TILES THAT ENHANCE THE
AESTHETIC OF EVERY ROOM. WITH A FOCUS ON PRECISION, SUSTAINABILITY, AND
LASTING QUALITY, WE STRIVE TO CREATE TILES THAT ARE NOT JUST FUNCTIONAL, BUT
WORKS OF ART THAT LEAVE A LASTING IMPRESSION.


AT YOUR CERAMICA, WE ARE DEDICATED TO REDEFINING HOW SPACES ARE DESIGNED, ENSURING EACH TILE WE CRAFT BECOMES A PIECE OF ART THAT STANDS

THE TEST OF TIME.

AT YOUR CERAMICA, WE BELIEVE THAT EVERY TILE WE CREATE IS MORE THAN JUST A

PRODUCT – IT'S A MASTERPIECE. WITH A COMMITMENT TO QUALITY AND
INNOVATION, WE DRAW INSPIRATION FROM THE BEAUTY AND DIVERSITY OF THE
NATURAL WORLD. OUR TILES ECHO THE TEXTURES, COLORS, AND PATTERNS OF
NATURE, BLENDING ARTISTRY WITH ADVANCED TECHNOLOGY.




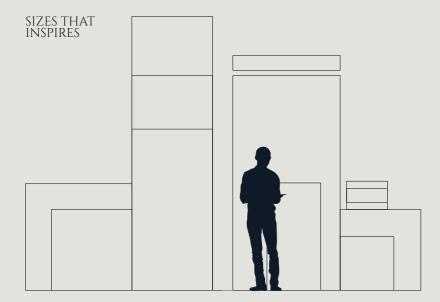


NATURE'S SERENE LANDSCAPES SERVE AS OUR MUSE. FROM THE CALMING HUES
OF TRANQUIL WATERS TO THE GENTLE TEXTURES OF WEATHERED STONE, OUR
DESIGNS ARE INSPIRED BY THE WORLD'S MOST PEACEFUL AND CAPTIVATING
ENVIRONMENTS. EACH TILE CAPTURES THE ESSENCE OF NATURE'S CALM AND
INTEGRATES IT SEAMLESSLY INTO YOUR LIVING SPACES.

OUR TILES ARE CRAFTED WITH PRECISION, REFLECTING THE SUBTLE ELEGANCE AND ENDURING STRENGTH FOUND IN NATURE. BY COMBINING THESE NATURAL ELEMENTS WITH INNOVATIVE TECHNOLOGY AND ECO-FRIENDLY PRACTICES, WE ENSURE THAT EVERY TILE FROM YOUR CERAMICA ENHANCES THE SERENITY OF YOUR SURROUNDINGS WHILE OFFERING SUPERIOR DURABILITY AND PERFORMANCE.

WWW.YOURCERAMICA.COM

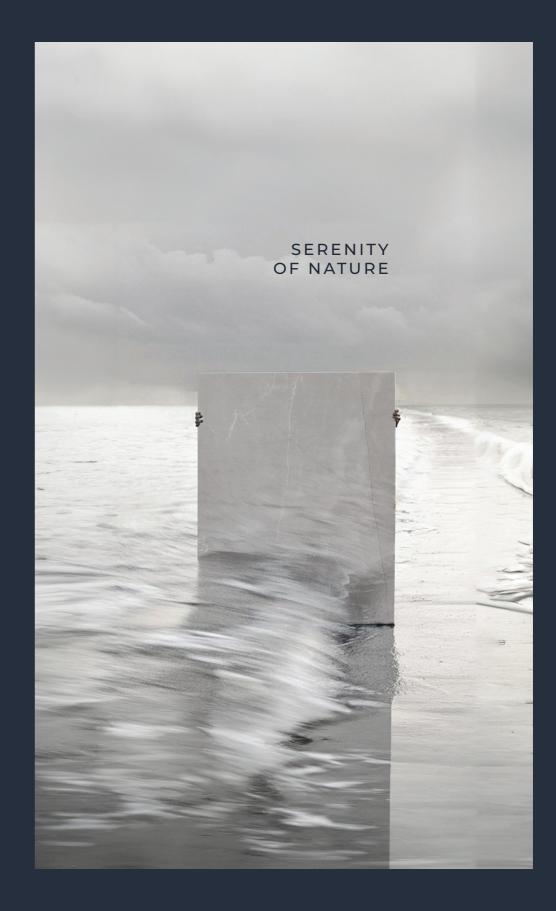

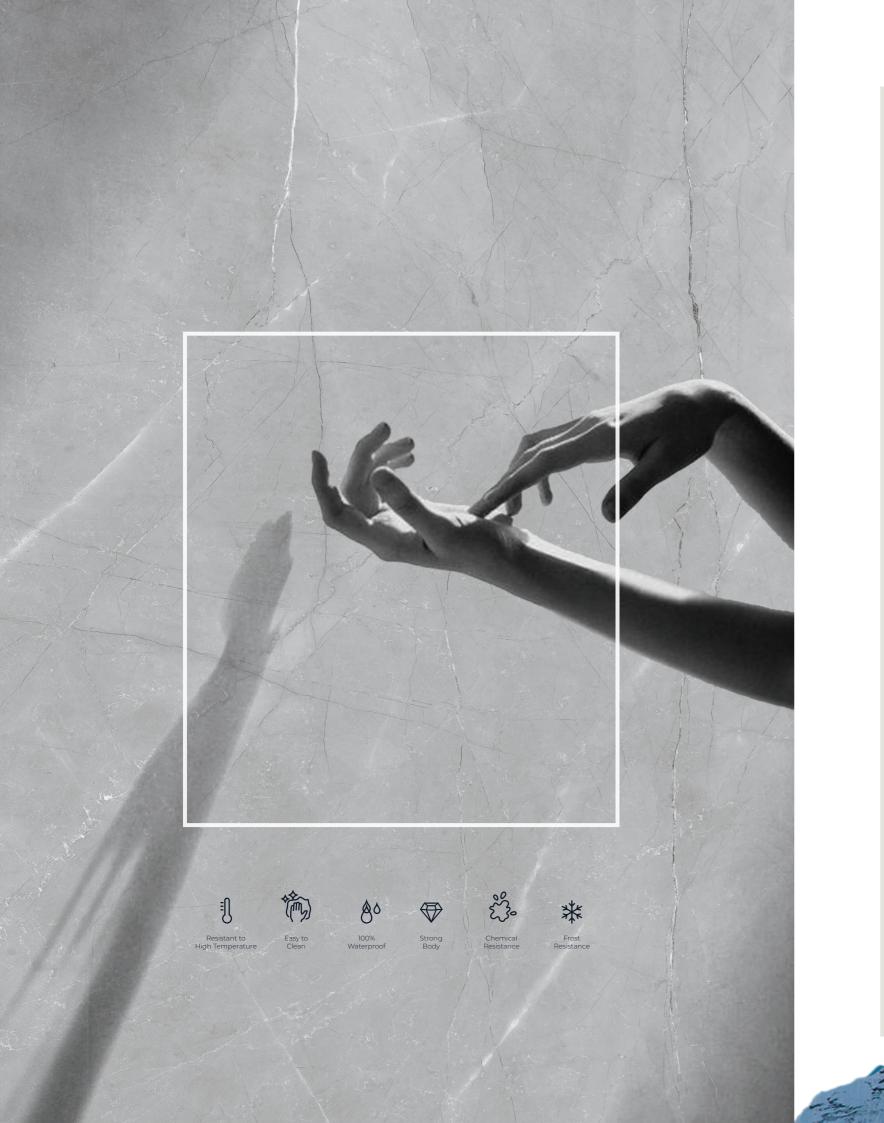



UNMATCHED QUALITY & PERFORMANCE

AT YOUR CERAMICA, WE CREATE STYLISH AND PRACTICAL TILES THAT

ARE EASY TO MAINTAIN AND 100% WATERPROOF. OUR TILES OFFER

SUPERIOR CHEMICAL RESISTANCE, ARE SCRATCH AND WEAR RESISTANT,

AND MADE WITH ECO-FRIENDLY MATERIALS. THEY ARE PERFECT FOR

ANY SPACE, PROVIDING A BLEND OF STUNNING DESIGN AND

EXCEPTIONAL FUNCTIONALITY.



ELEVATE EVERY SPACE

IMAGINE A KITCHEN THAT BLENDS ELEGANCE WITH PRACTICALITY, OR A BATHROOM THAT EXUDES TRANQUILITY AND MODERNITY. OUR DIVERSE RANGE OF TILES IS DESIGNED TO ENHANCE EVERY ROOM, TURNING ORDINARY SPACES INTO EXTRAORDINARY EXPERIENCES.













Shopping Mall




Airport






Gym



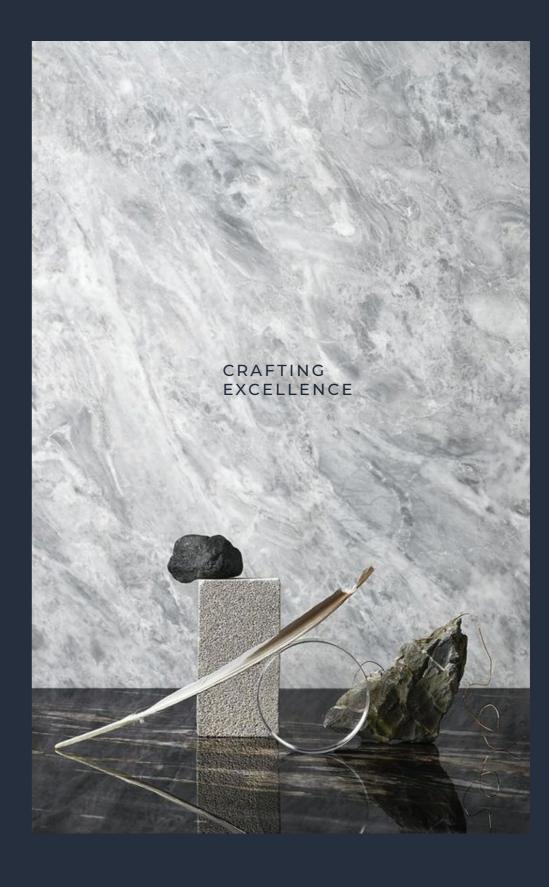


AUSTIN BIANCO




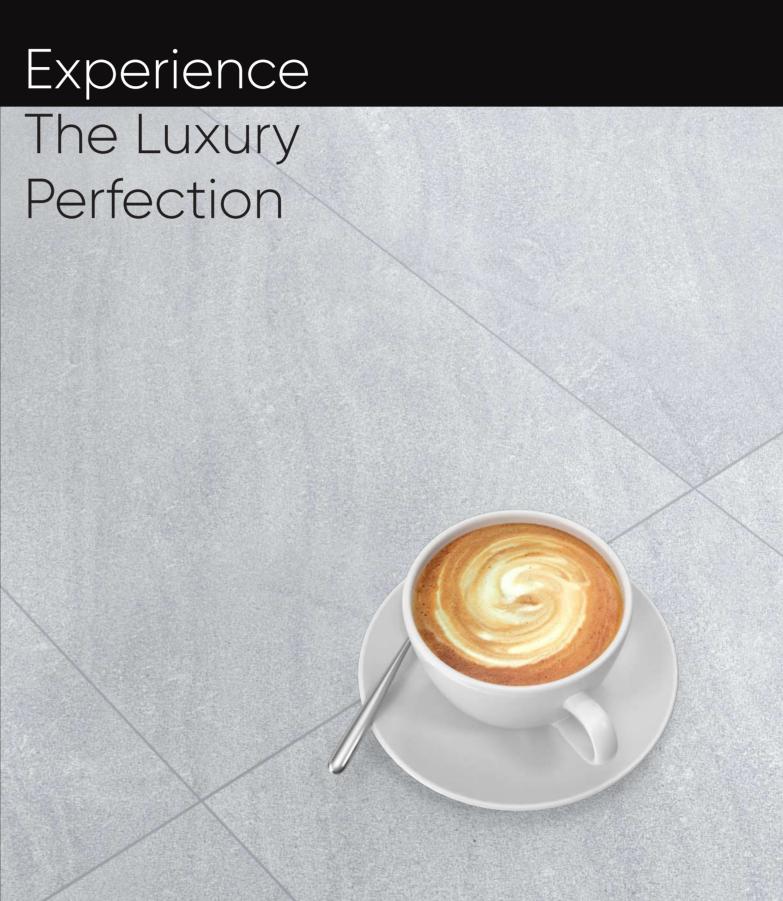




AUSTIN GREY

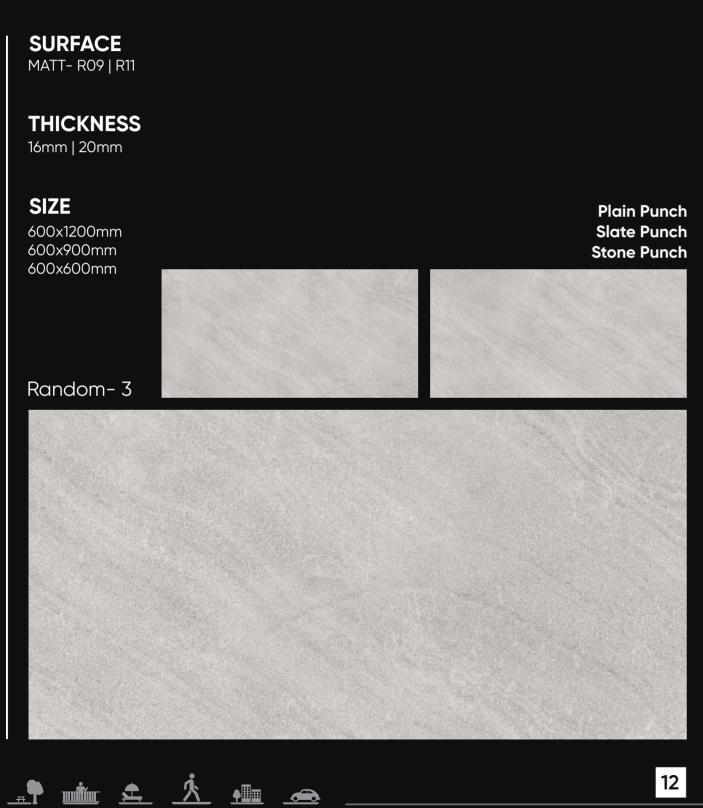

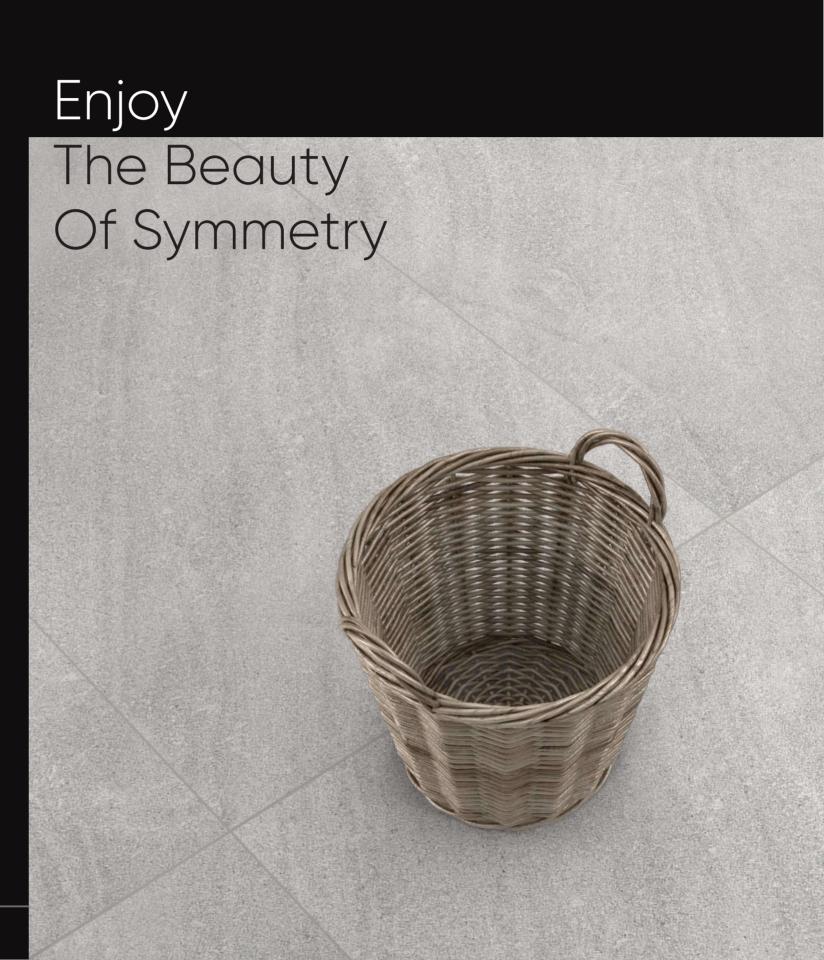



BOSTON CHOKO

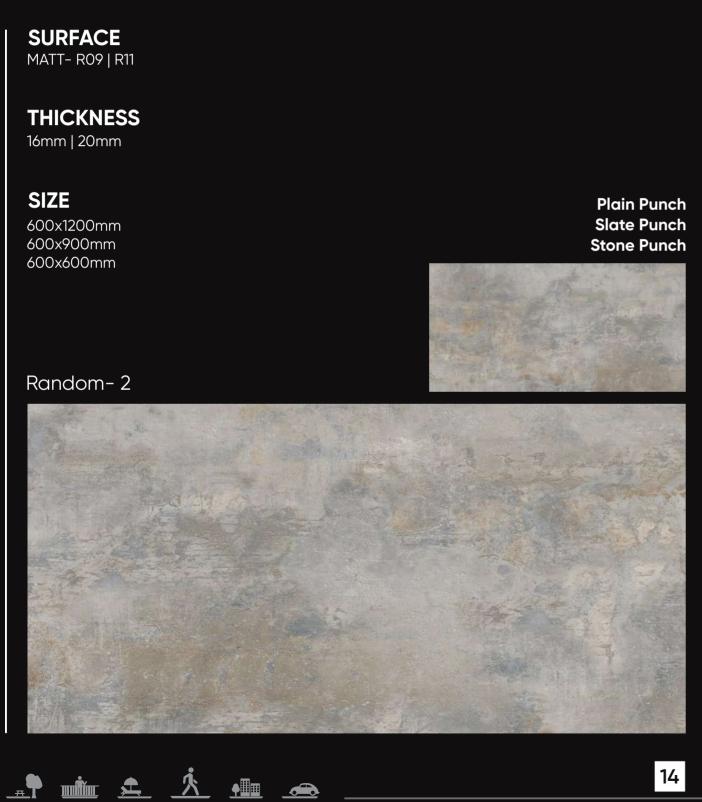

Quirky


















CAMLIN BIANCO

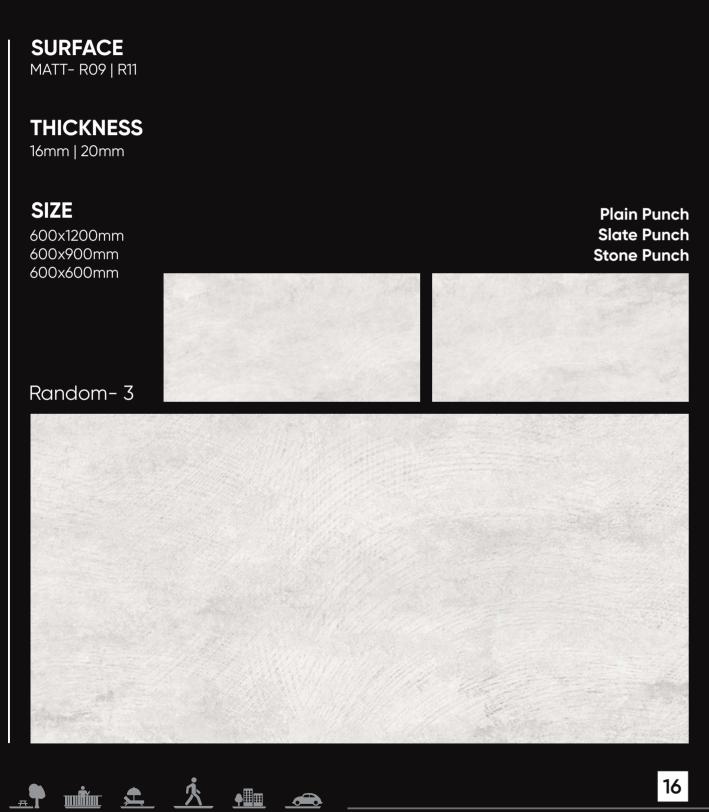


Adds Character To Your Spaces



CAMLIN RUST



Mediterranean

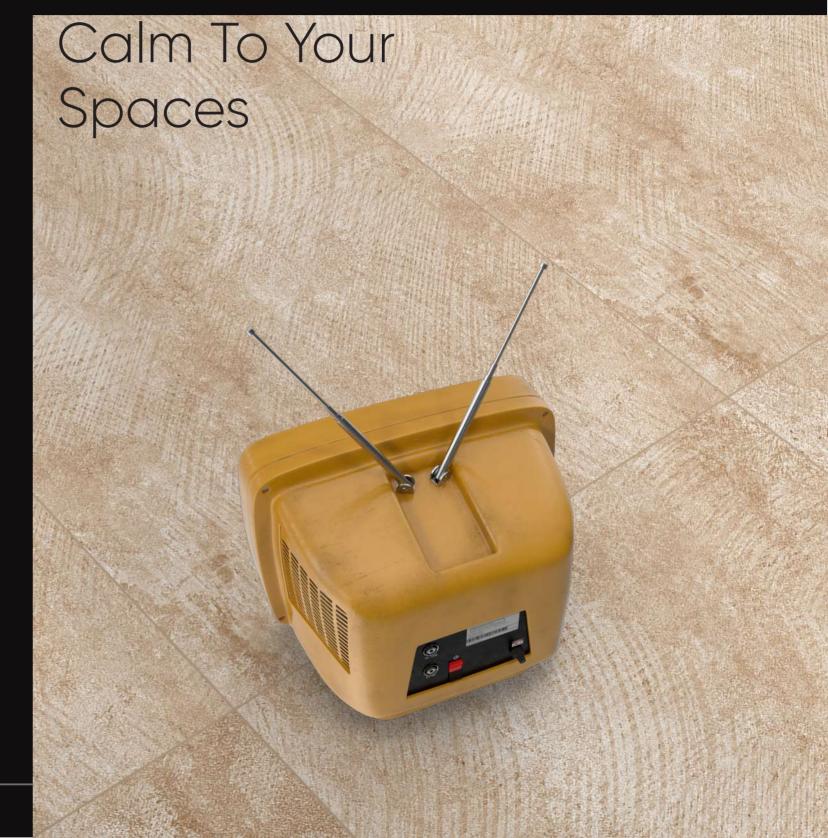






CHEPO BEIGE




Elegance

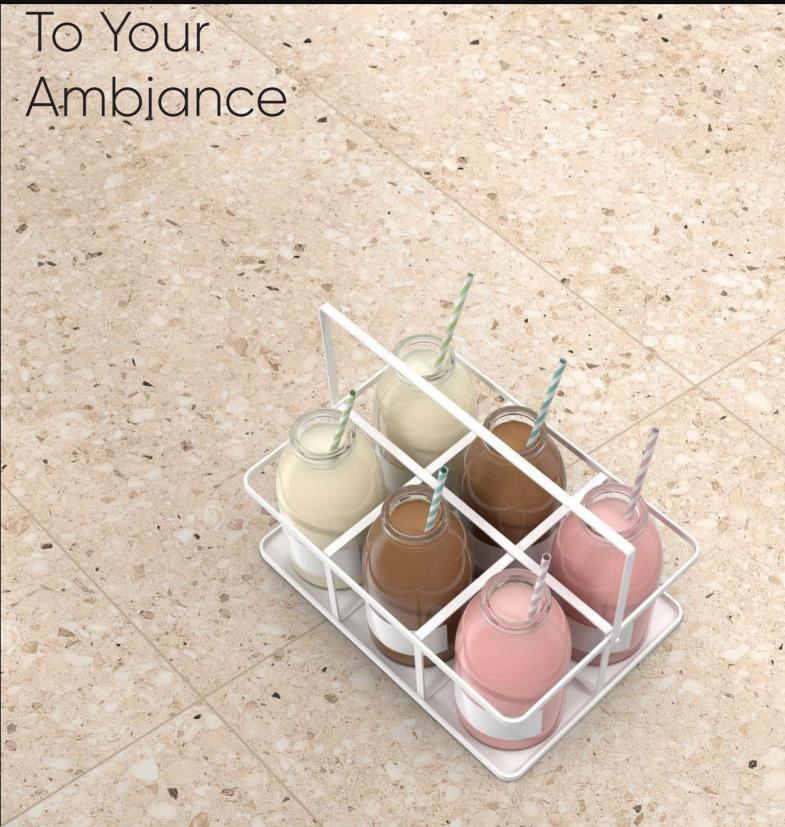




CHEPO BIANCO



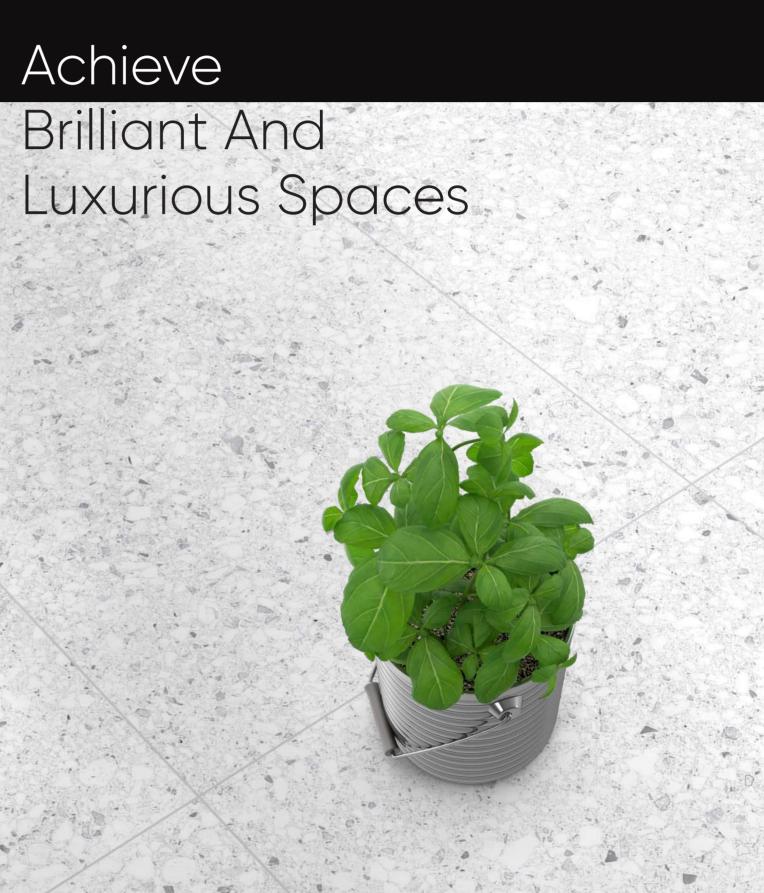


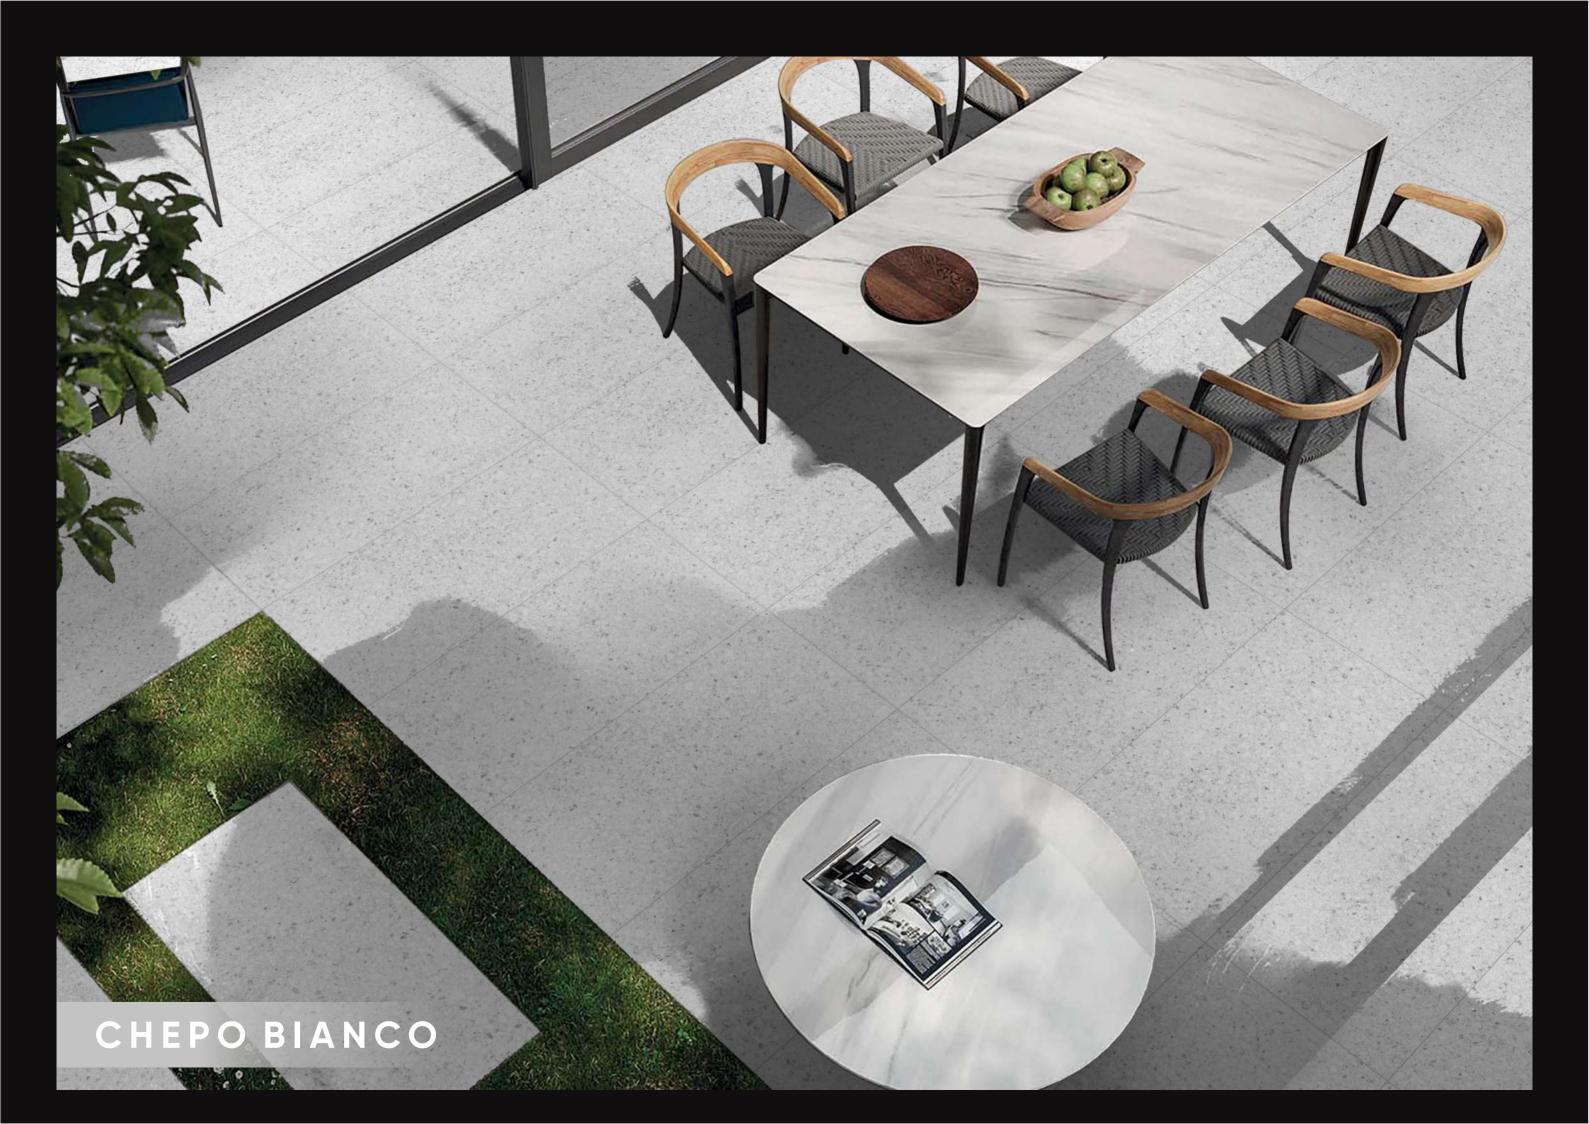

CHEPO GREY



Enhance

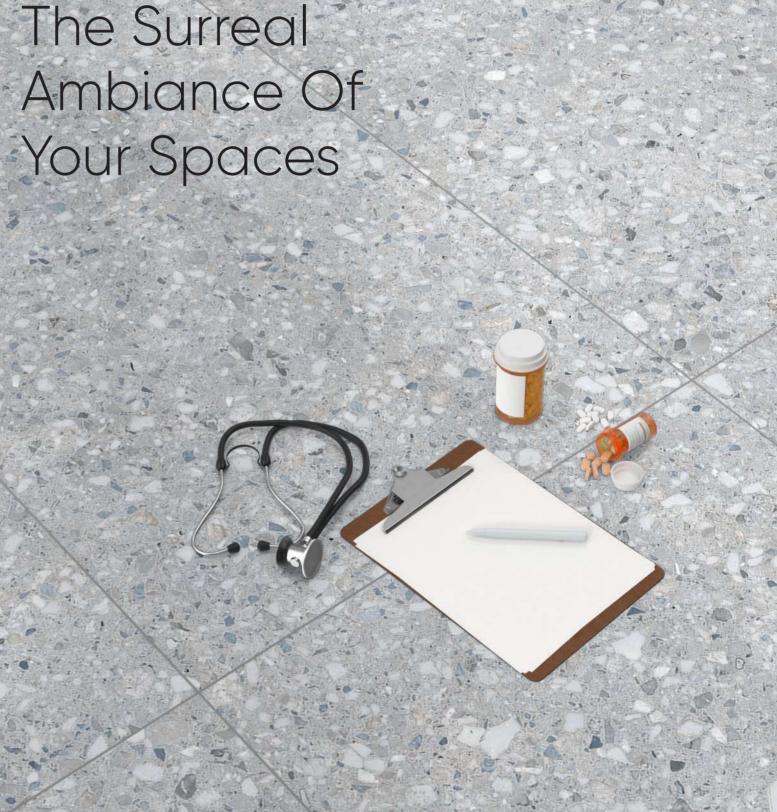



CHEPO MILK




Embellish






CONCRETE BLANCO

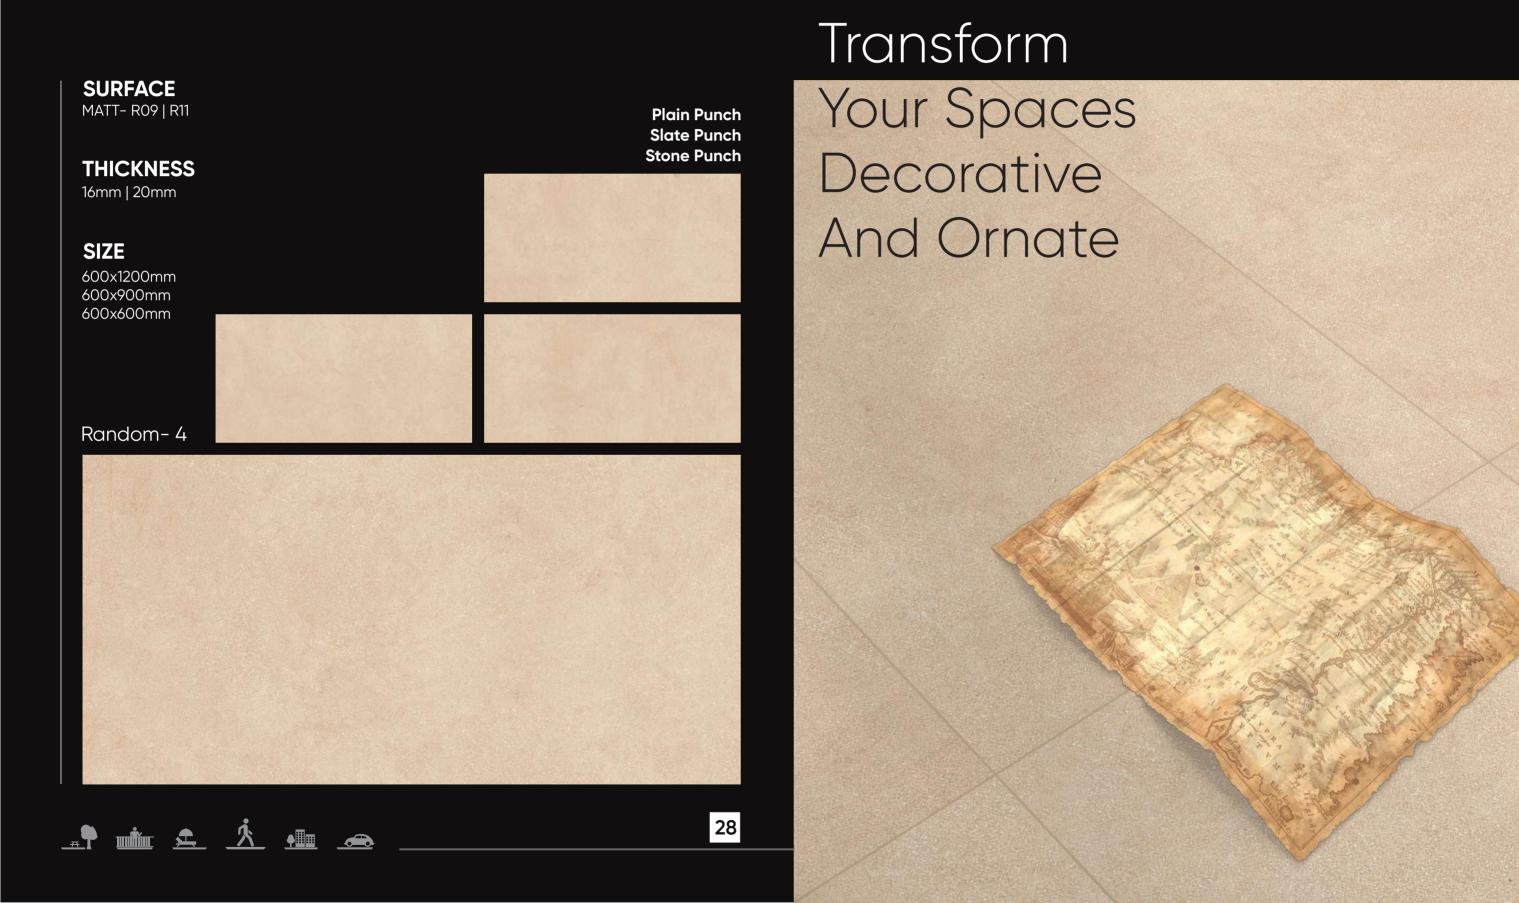



CONCRETE COTTO

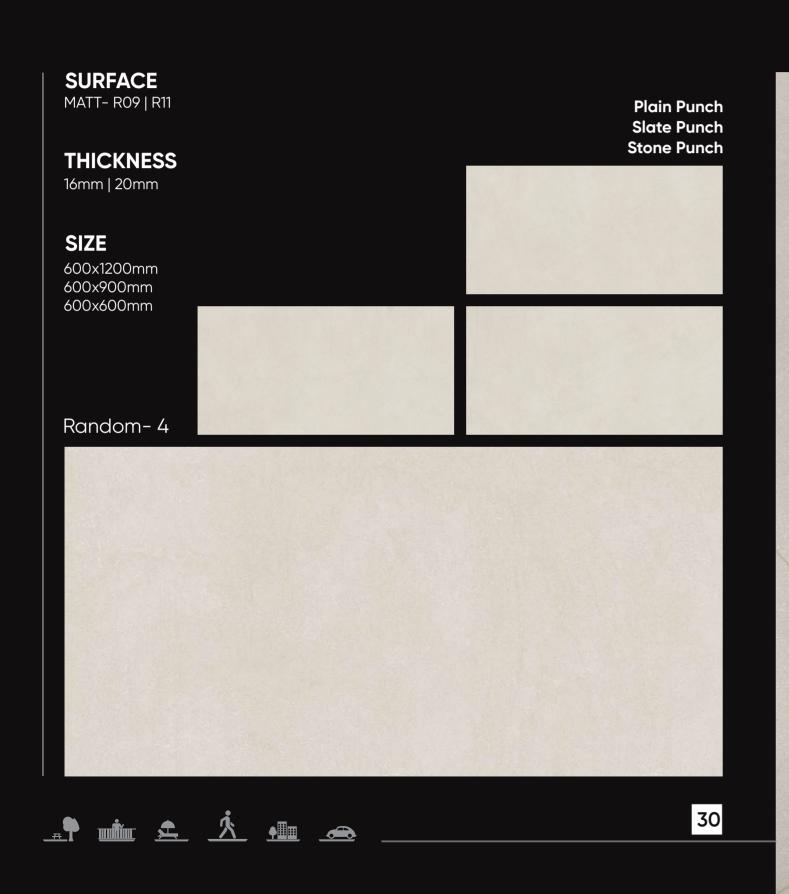

Design Your Spaces Creative And Mesmeric



CONCRETE MARRON



Shades

Give A Sense Of Unity






CONCRETE NATURAL






KANDY BEIGE

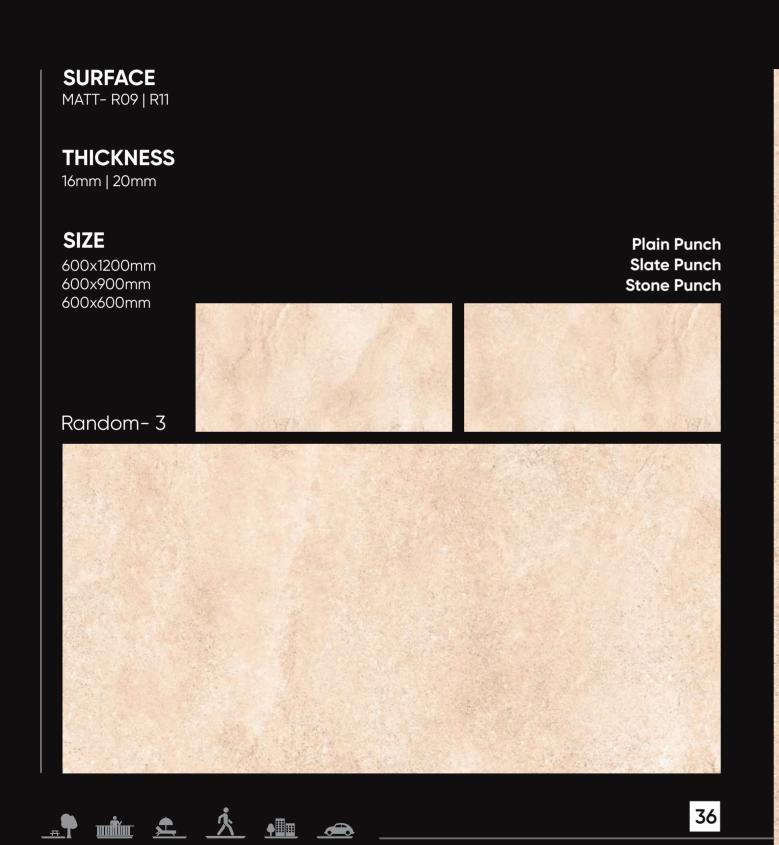

Accentuate The Accents In Your Living Spaces



KANDY BIANCO

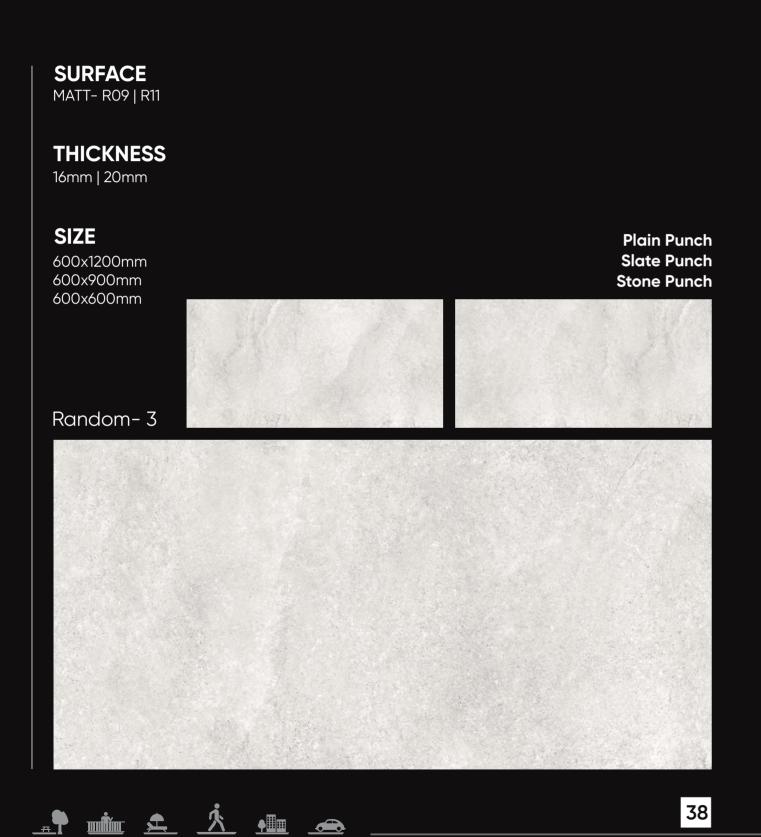


Transform Your Regular Into Something

Exceptional






KANDY GREEN

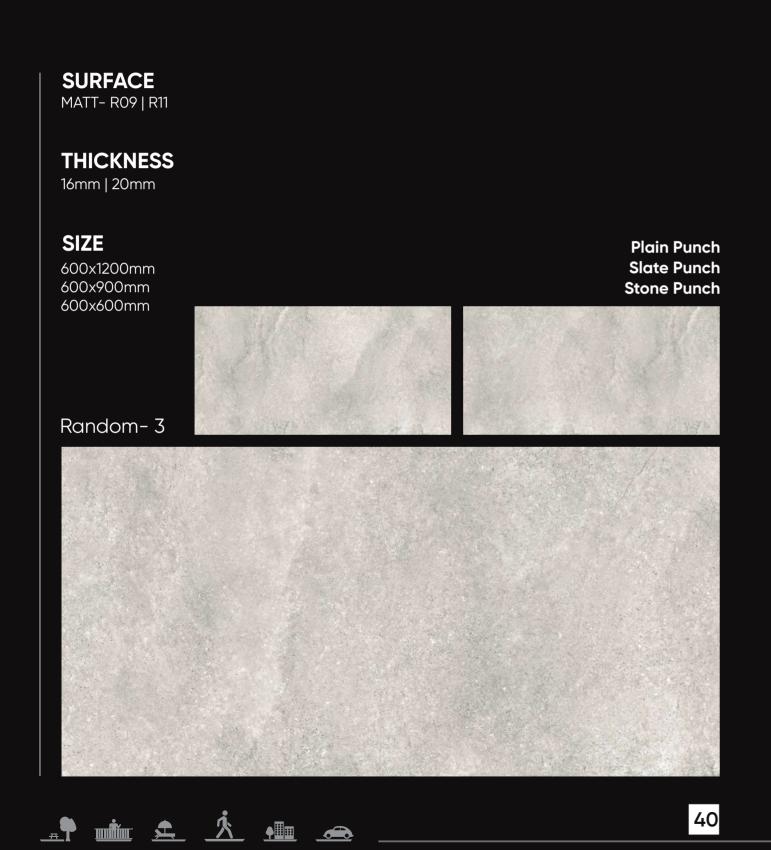







KANDY GREY

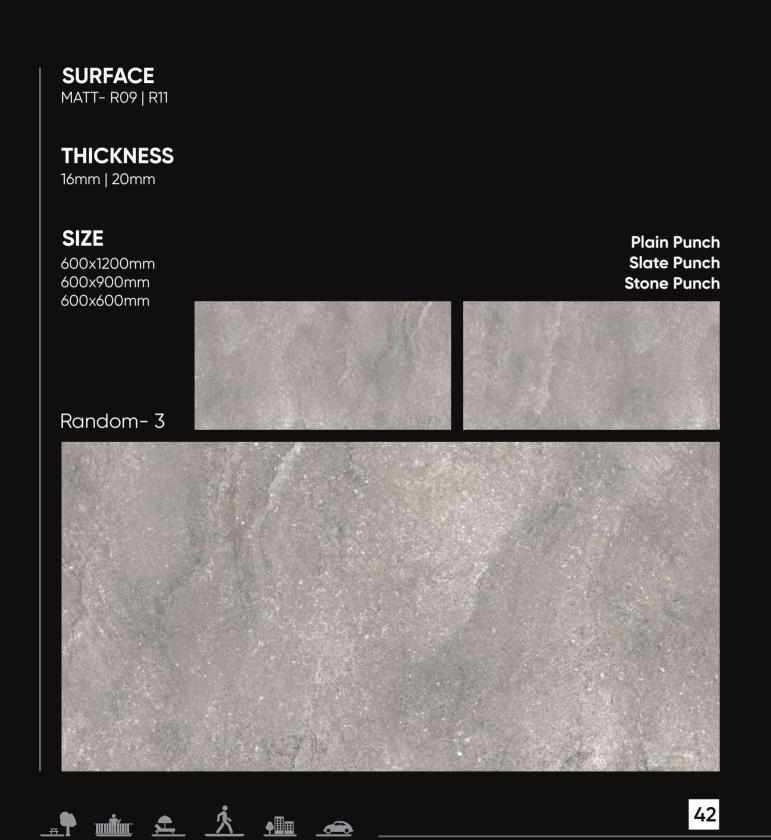

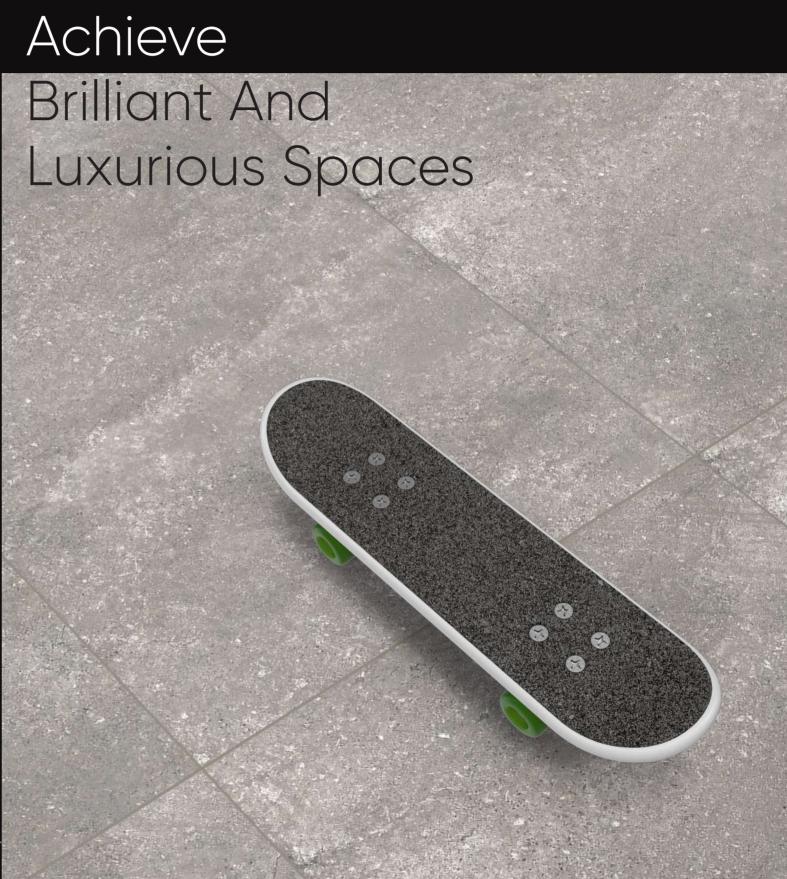




LAGOS BEIGE

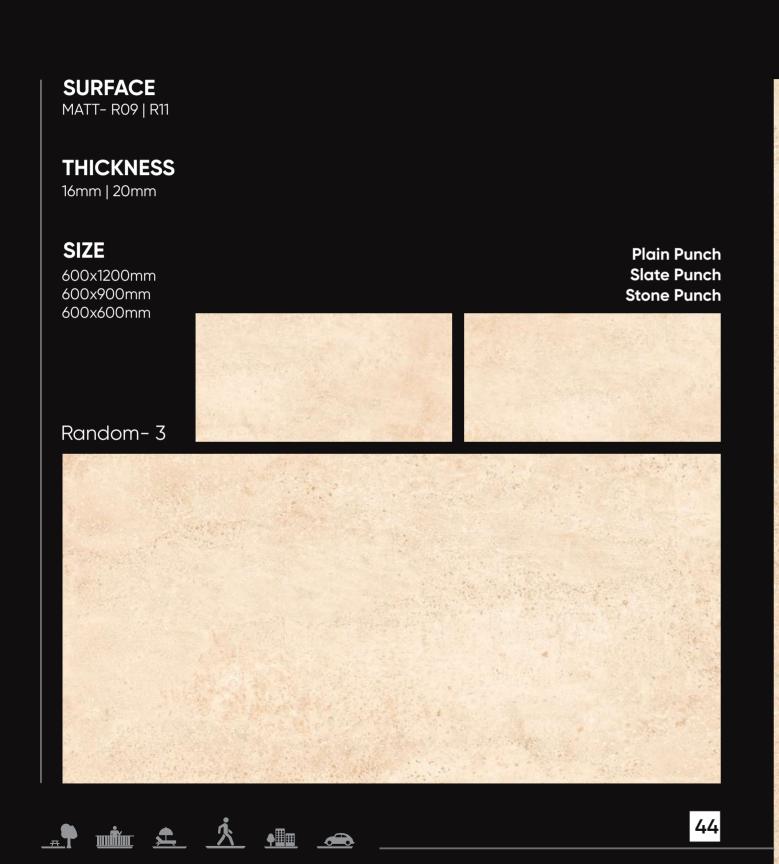


Make Your Place, As Your Dream




LAGOS BIANCO

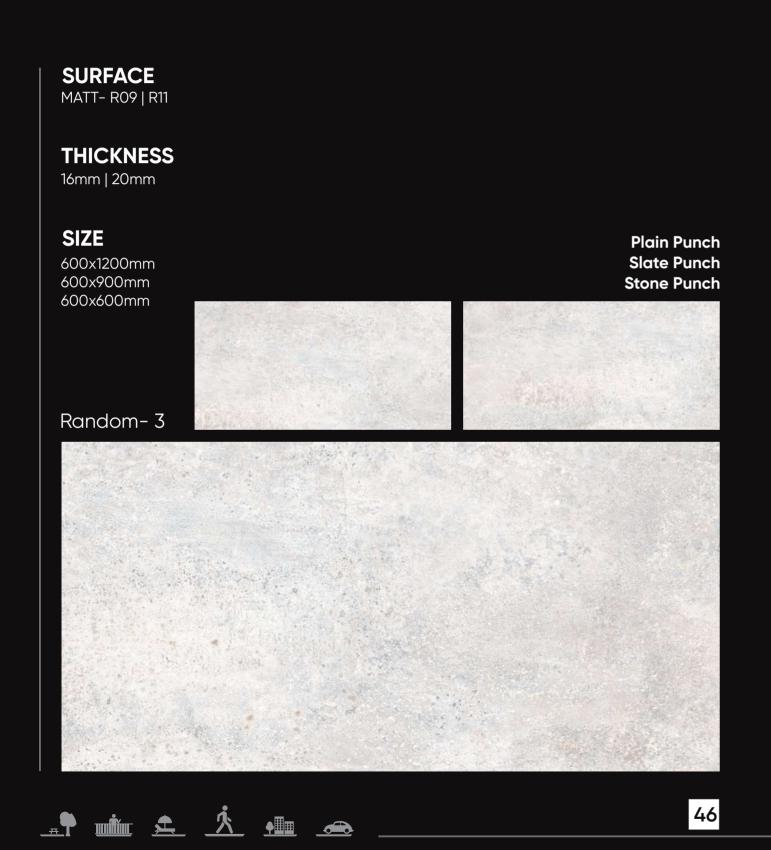

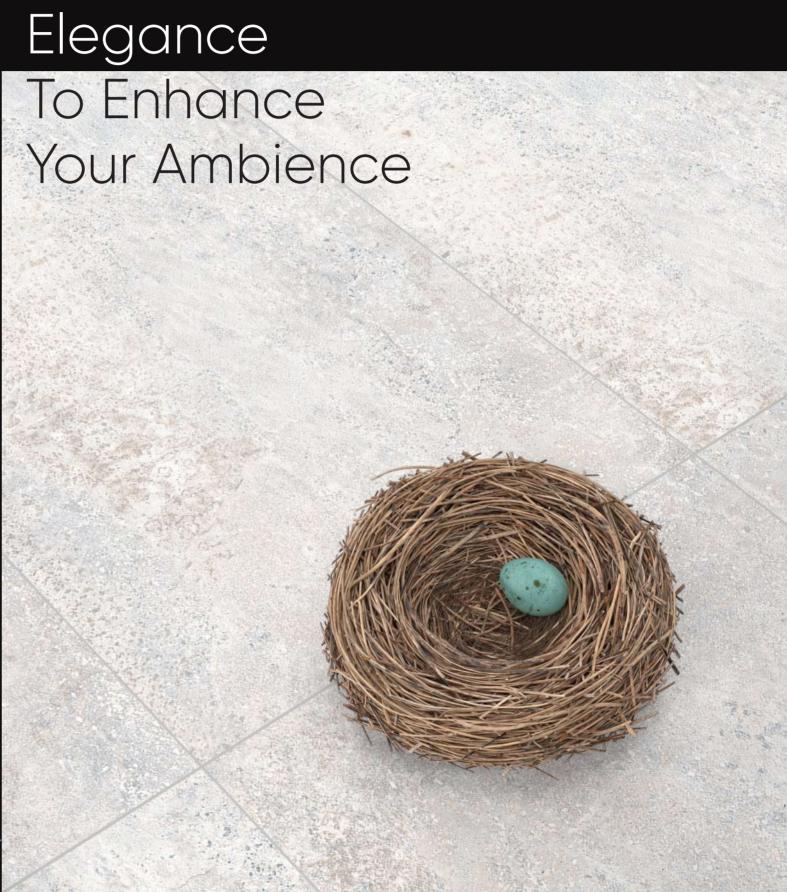




LAGOS NATURAL

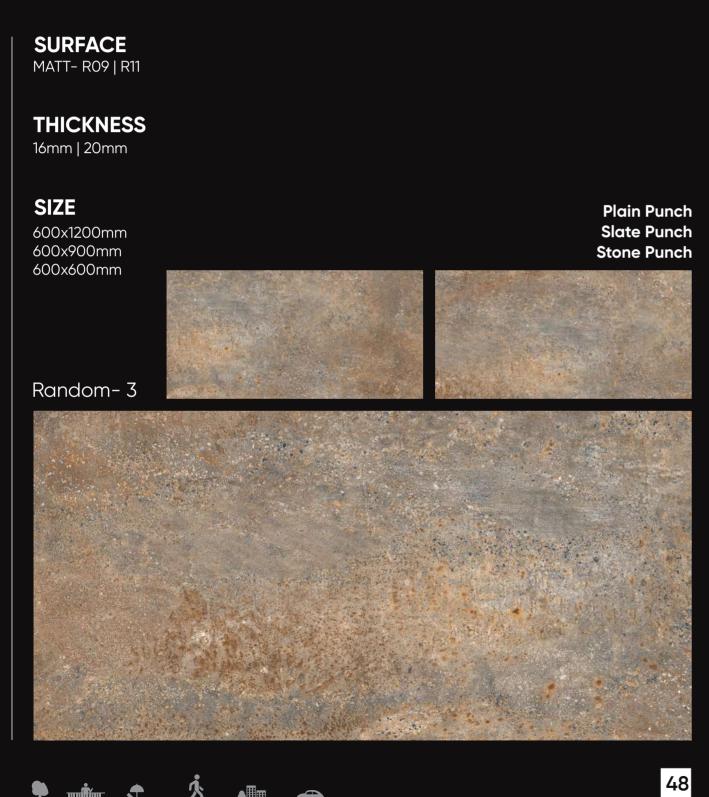

Enhance

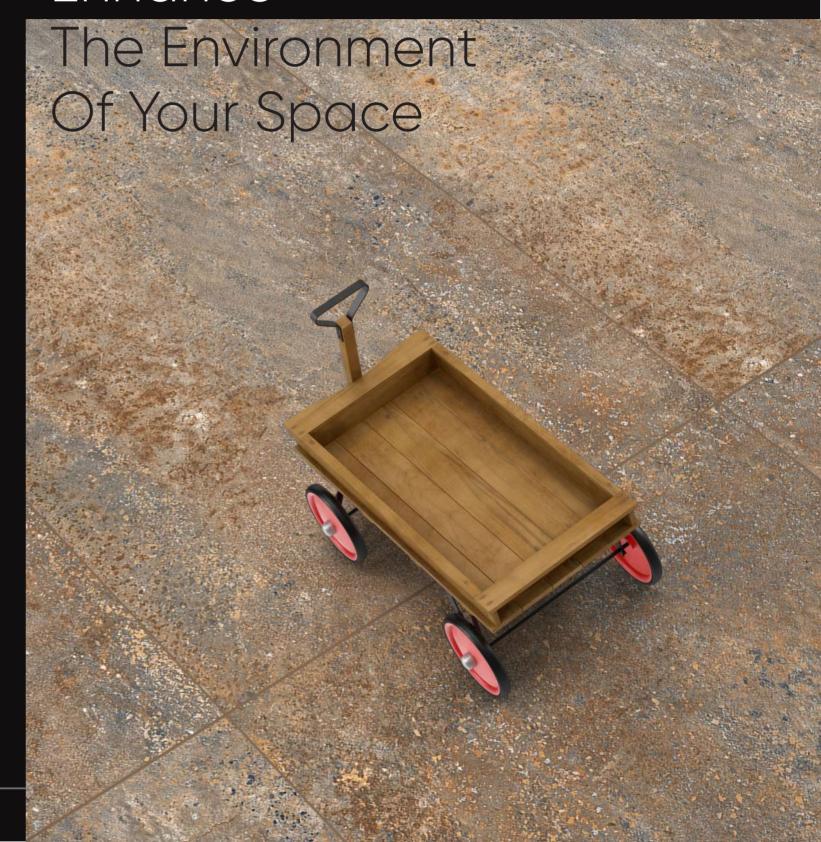





MEDINA BLANCO




Bring In


The Trendy Designs You Need





MEDINA BURLY

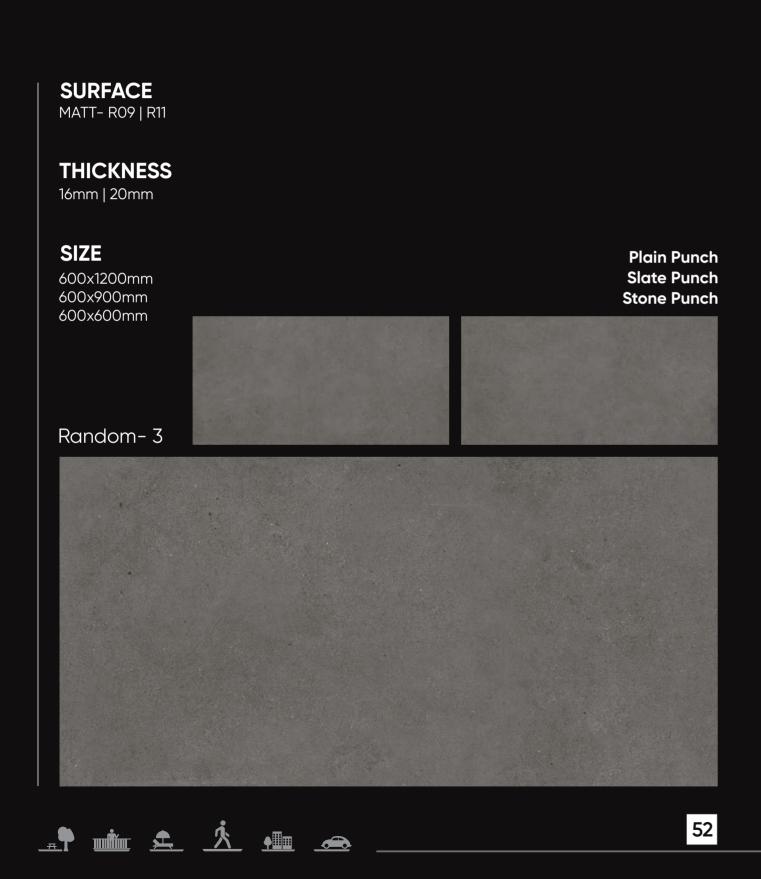

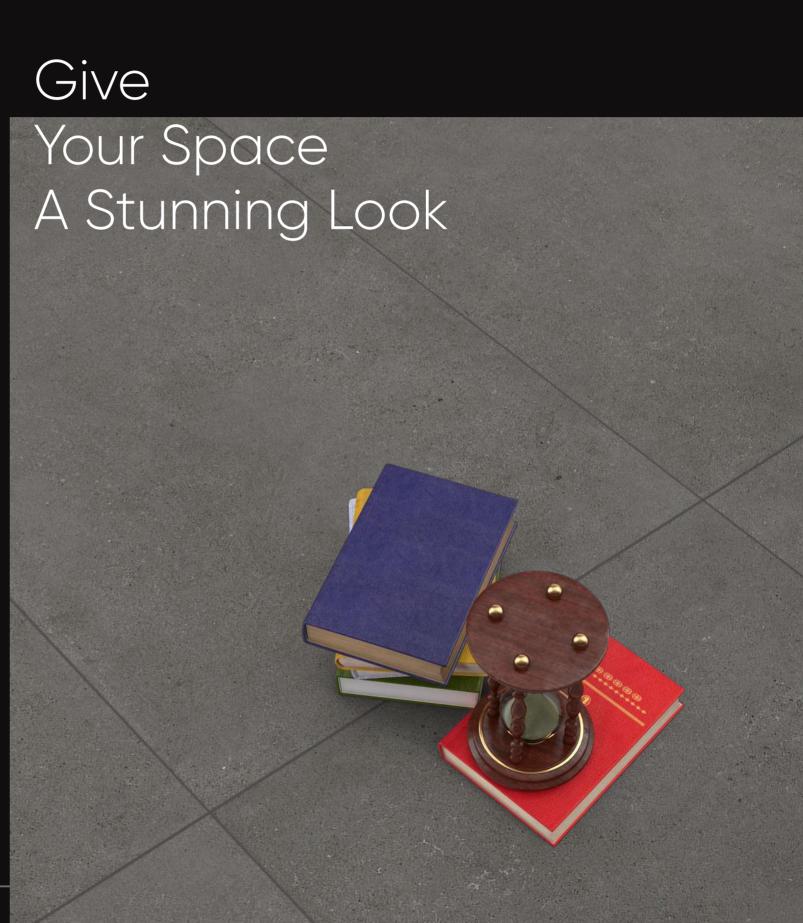




MEDINA COTTO



Aesthetic Charm To The Space



MEDINA GRIS

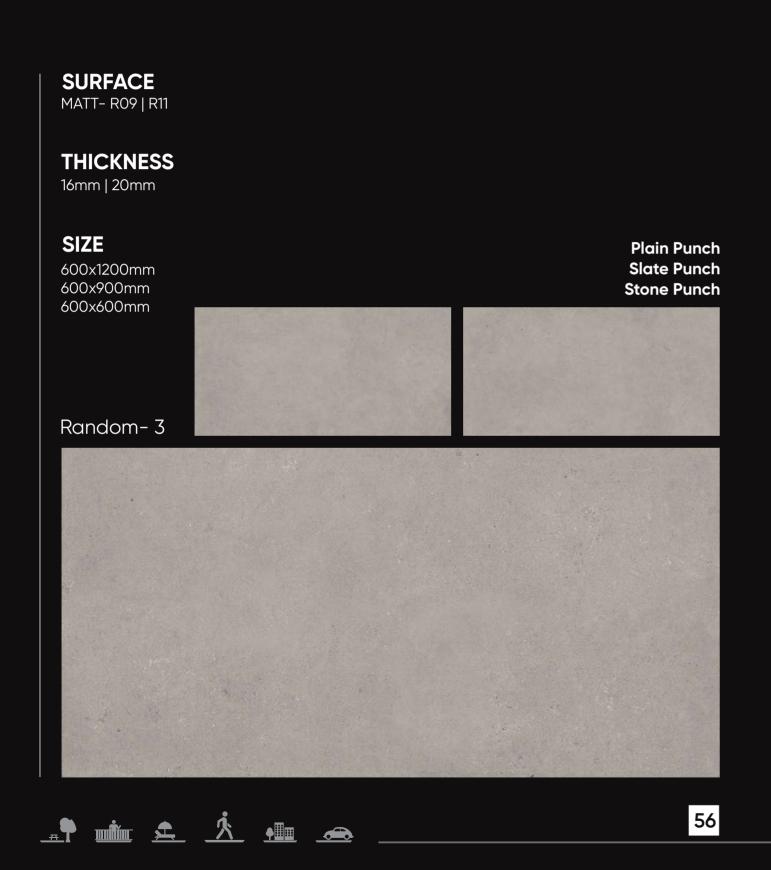

Creates Balanced And Minimal Spaces



MEDINA MARRON




Create A

Balanced And Subtle Atmosphere






MEDINA NEGRO

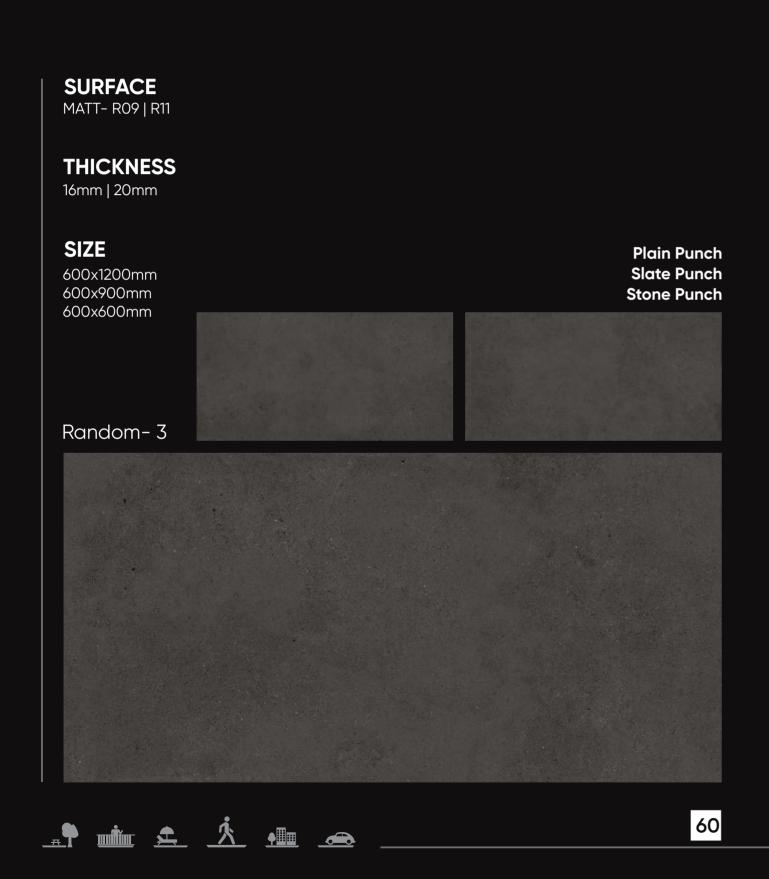



Unmatched Brilliance Of Style

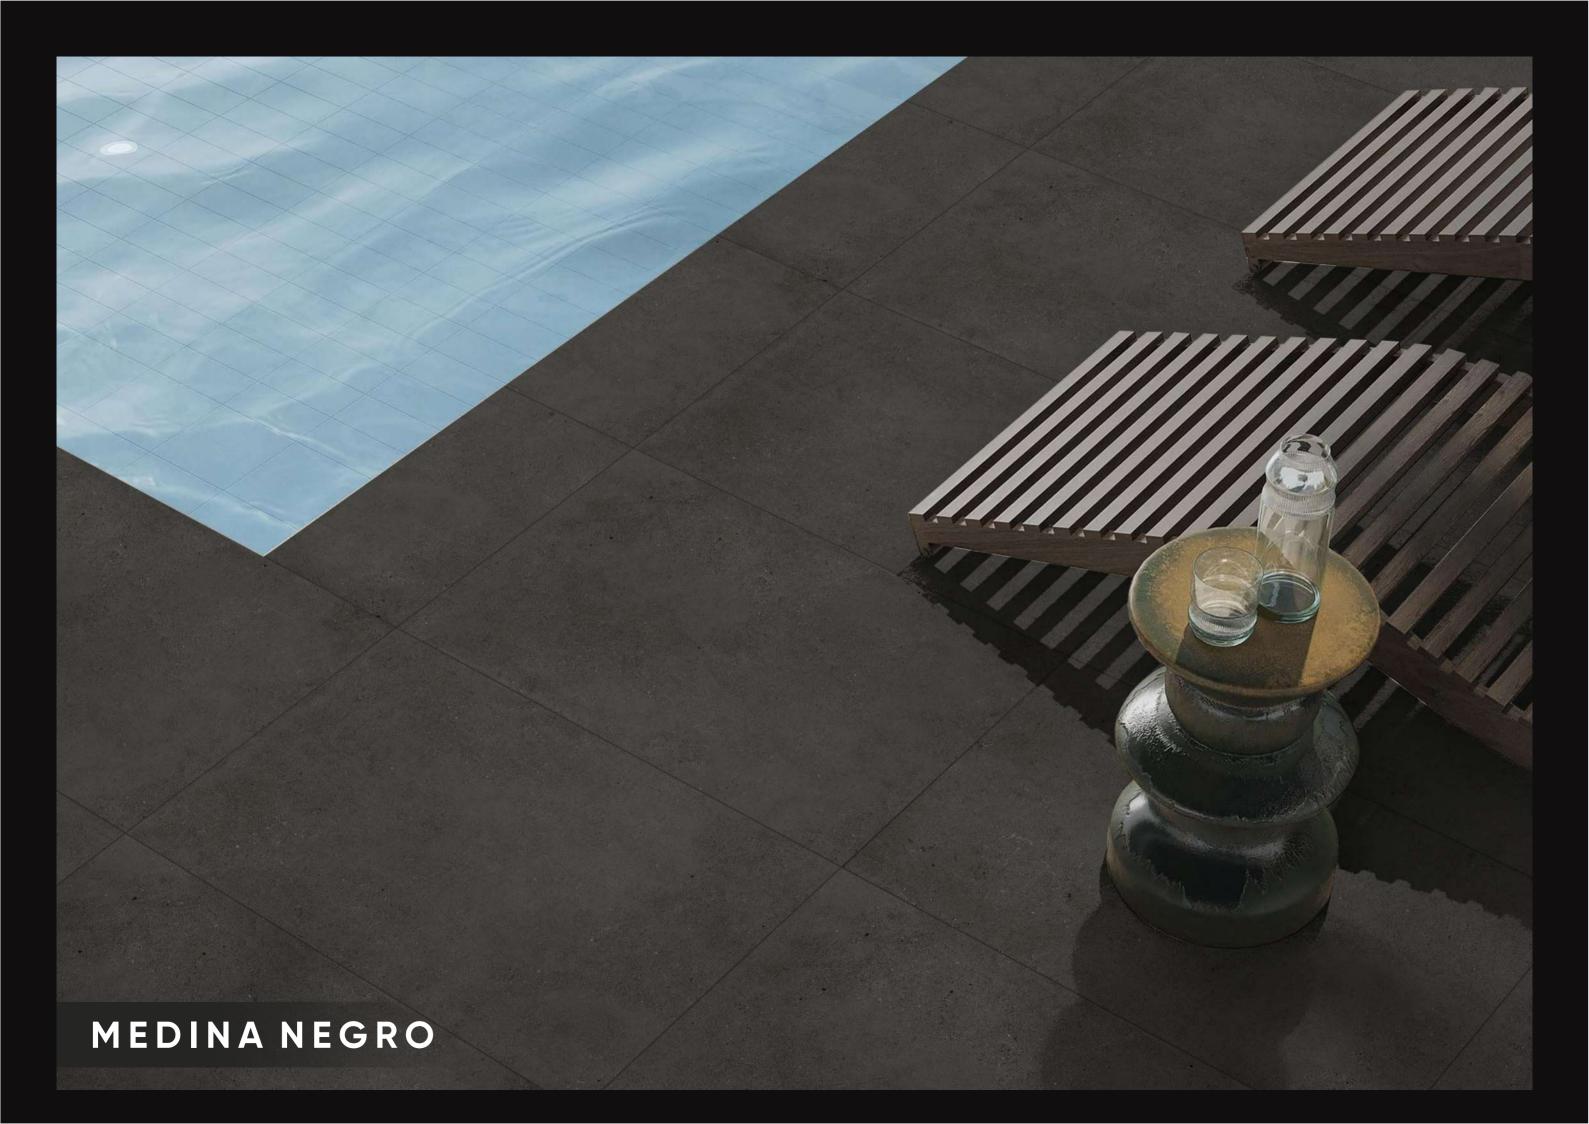

MILANO BEIGE



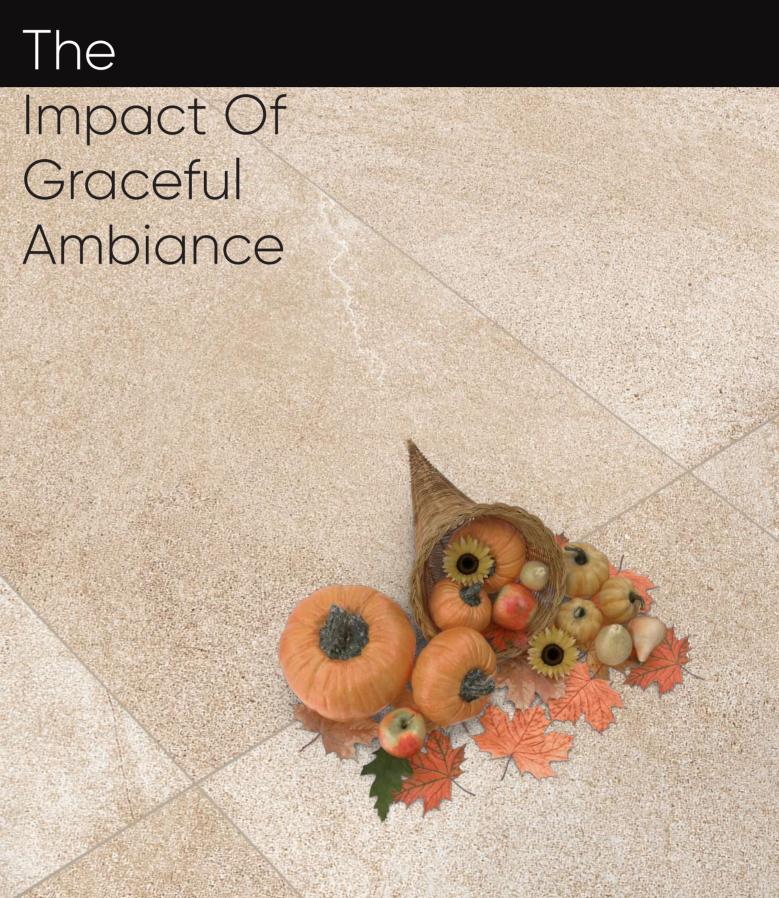

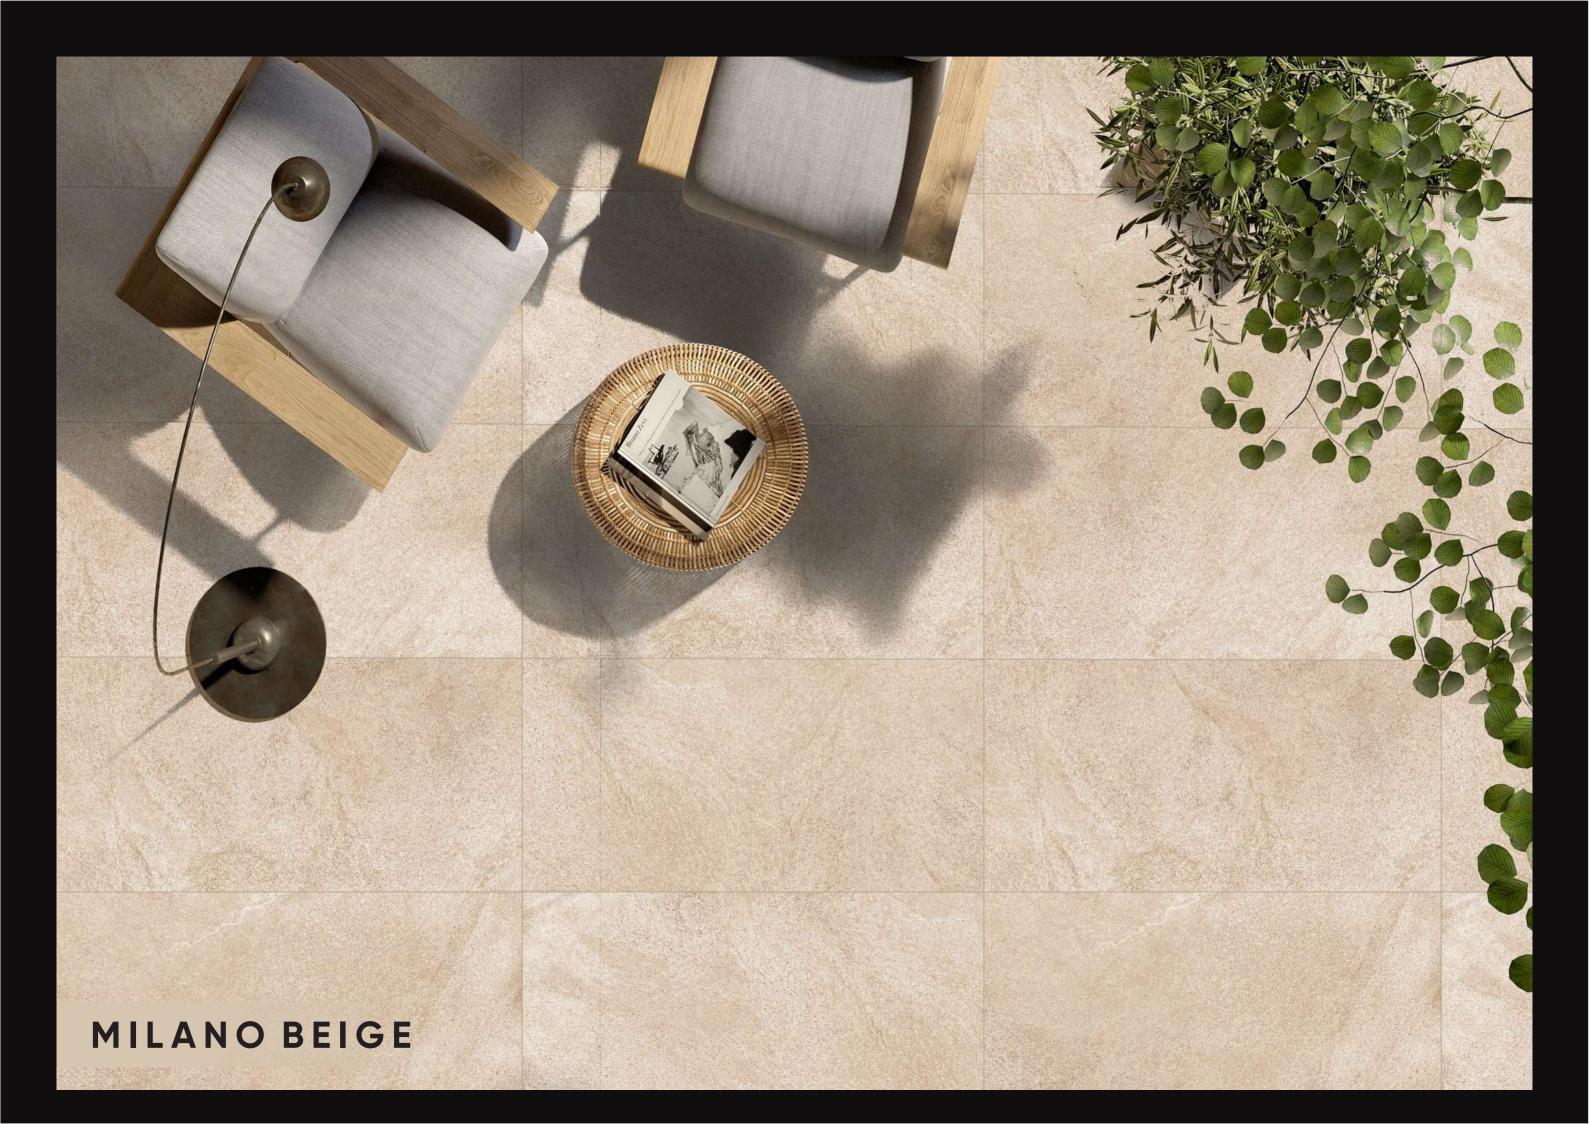


PERTH BEIGE





Bring Classic Beauty To Your Space



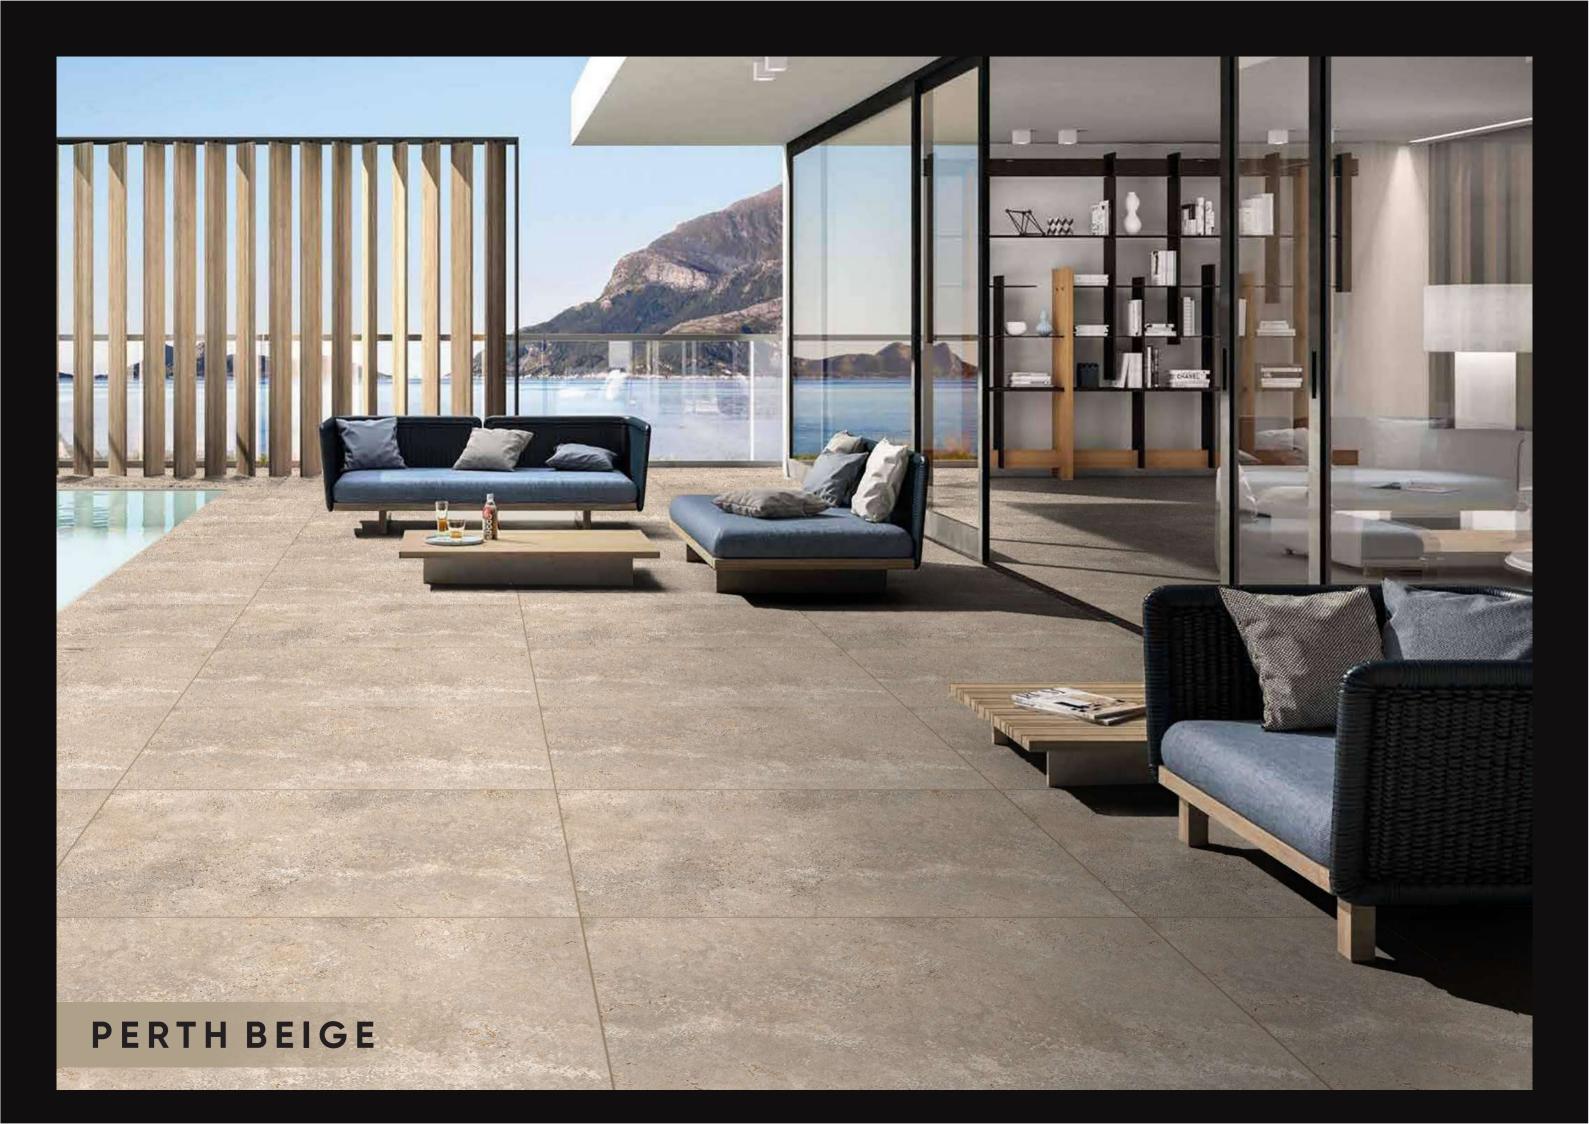

PERTH BIANCO

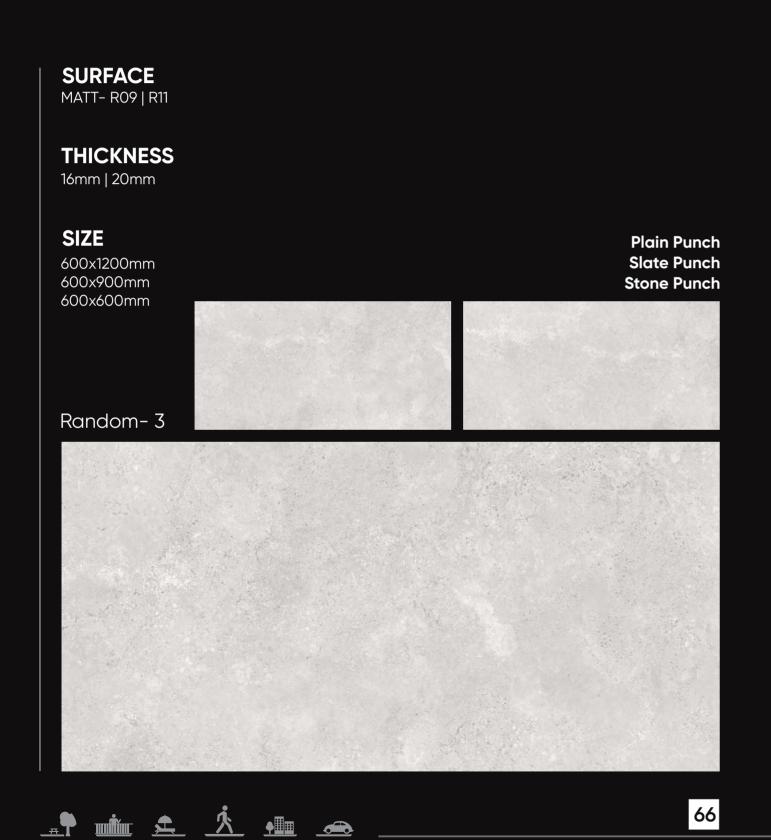

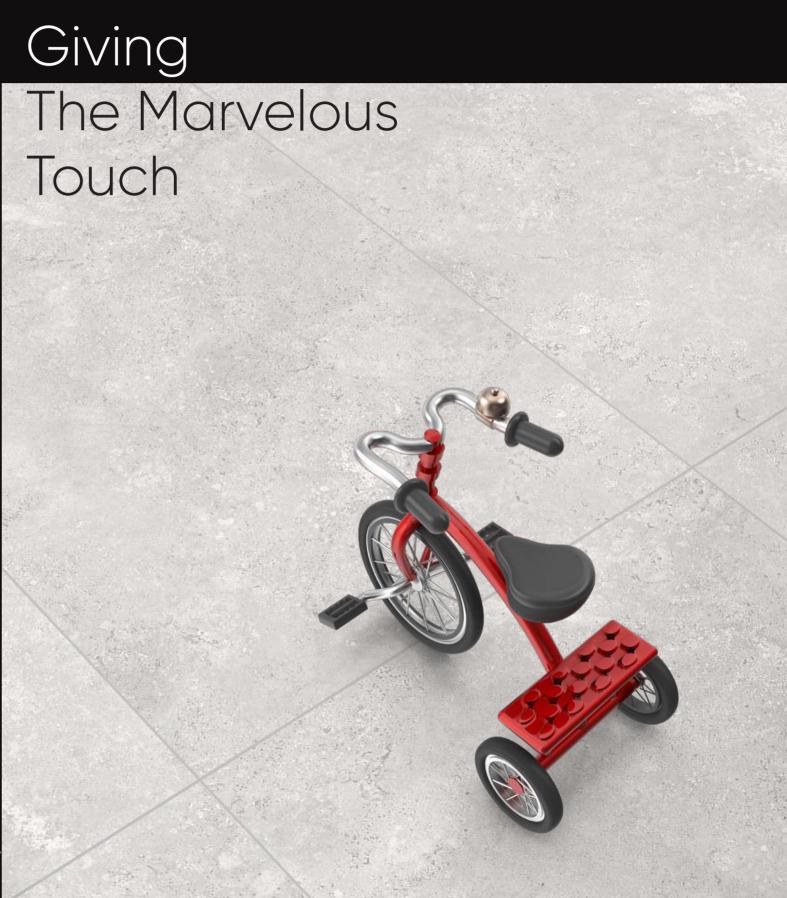



PERTH CHOKO



Make




















PORTO GREY

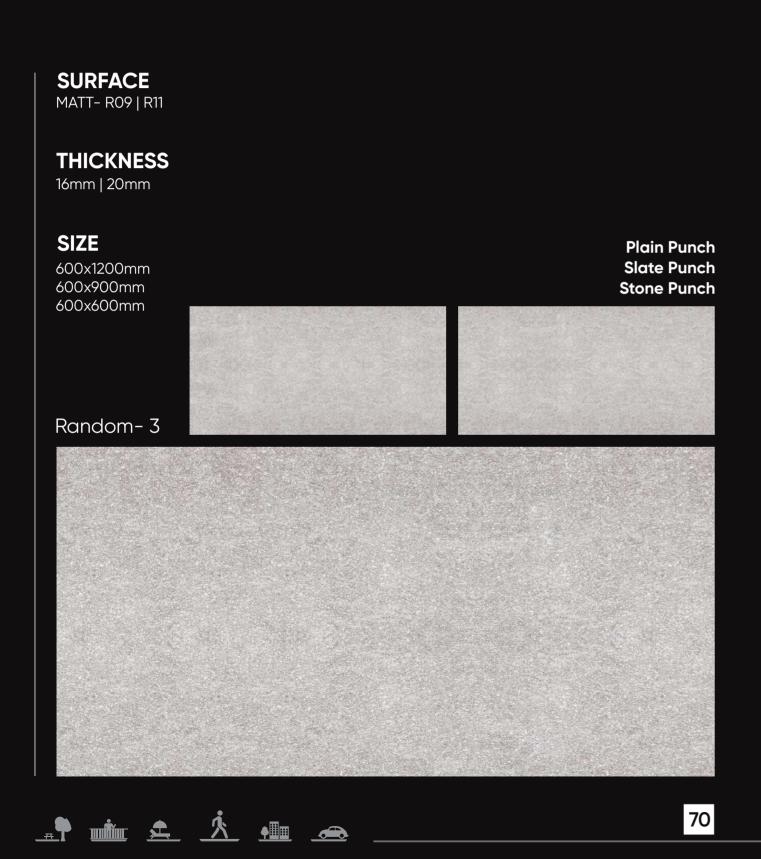

Revolutionize

Your Decor With The Regal Magnificence






POZZOLANA BURLY

SURFACE MATT- R09 | R11 **THICKNESS** 16mm | 20mm SIZE 600x1200mm 600x900mm 600x600mm **Plain Punch Slate Punch** Random-1 **Stone Punch**

72

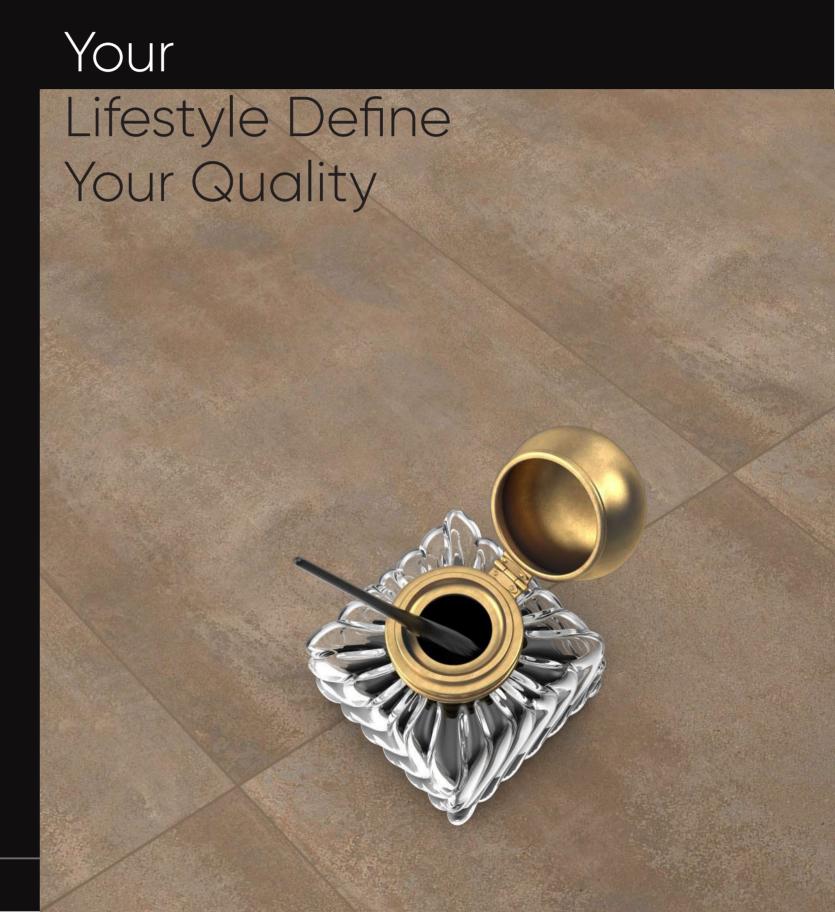



POZZOLANA GREY



The Charm Of Your Imagination




POZZOLANA MARRON

SURFACE MATT- R09 | R11 **THICKNESS** 16mm | 20mm SIZE 600x1200mm 600x900mm 600x600mm **Plain Punch Slate Punch** Random-1 **Stone Punch** 76





POZZOLANA SMOKE

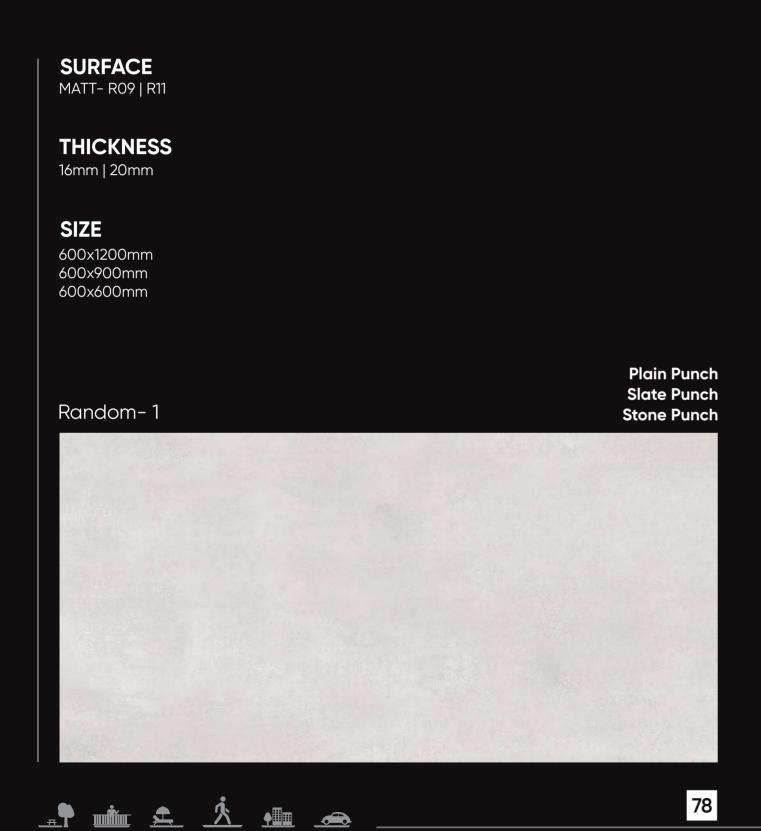

New Collection For All Season




ROCK BEIGE







ROCK BIANCO

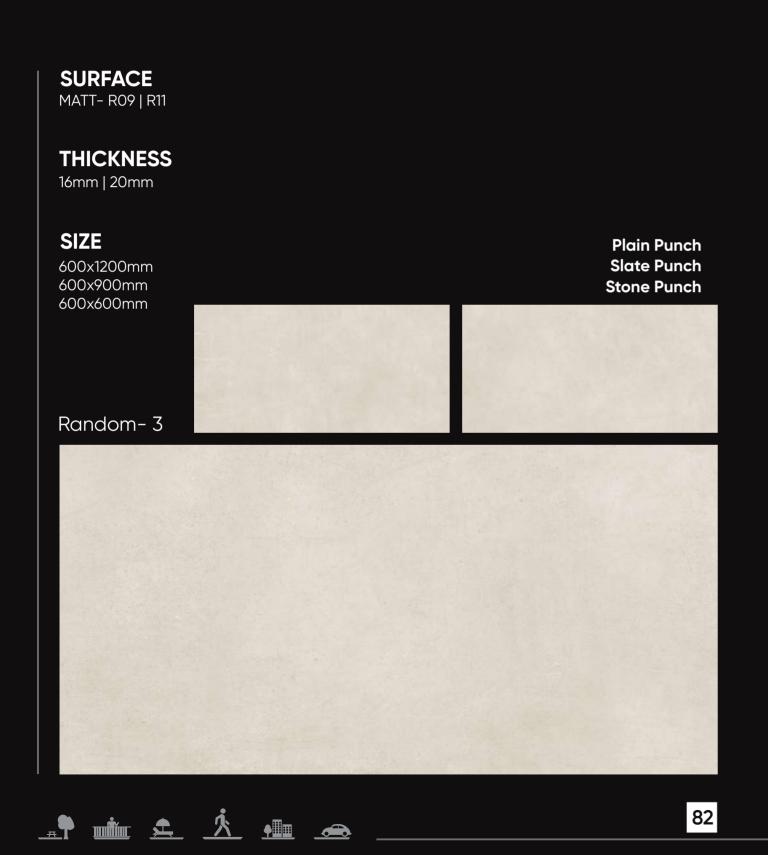

Add Some Sparks For Your Elegance Style



ROCK BROWN



Perfect For Your Living Style





ROCK CEMENTO




Creation And Imagination Together



ROCK GRIS



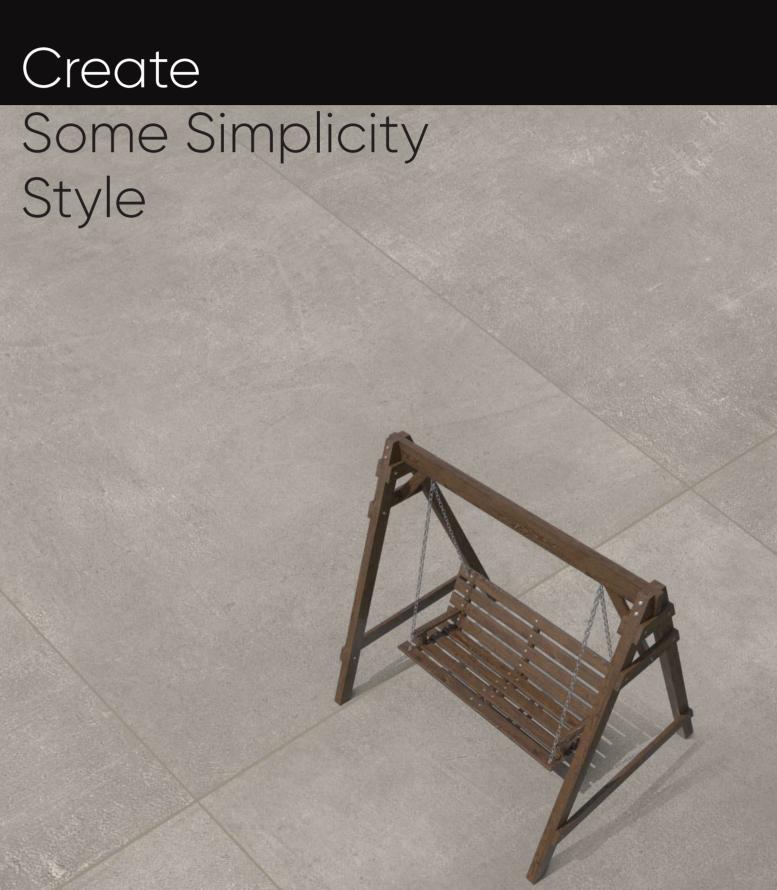





ROCK NATURAL




Collection Of New Innovation Style

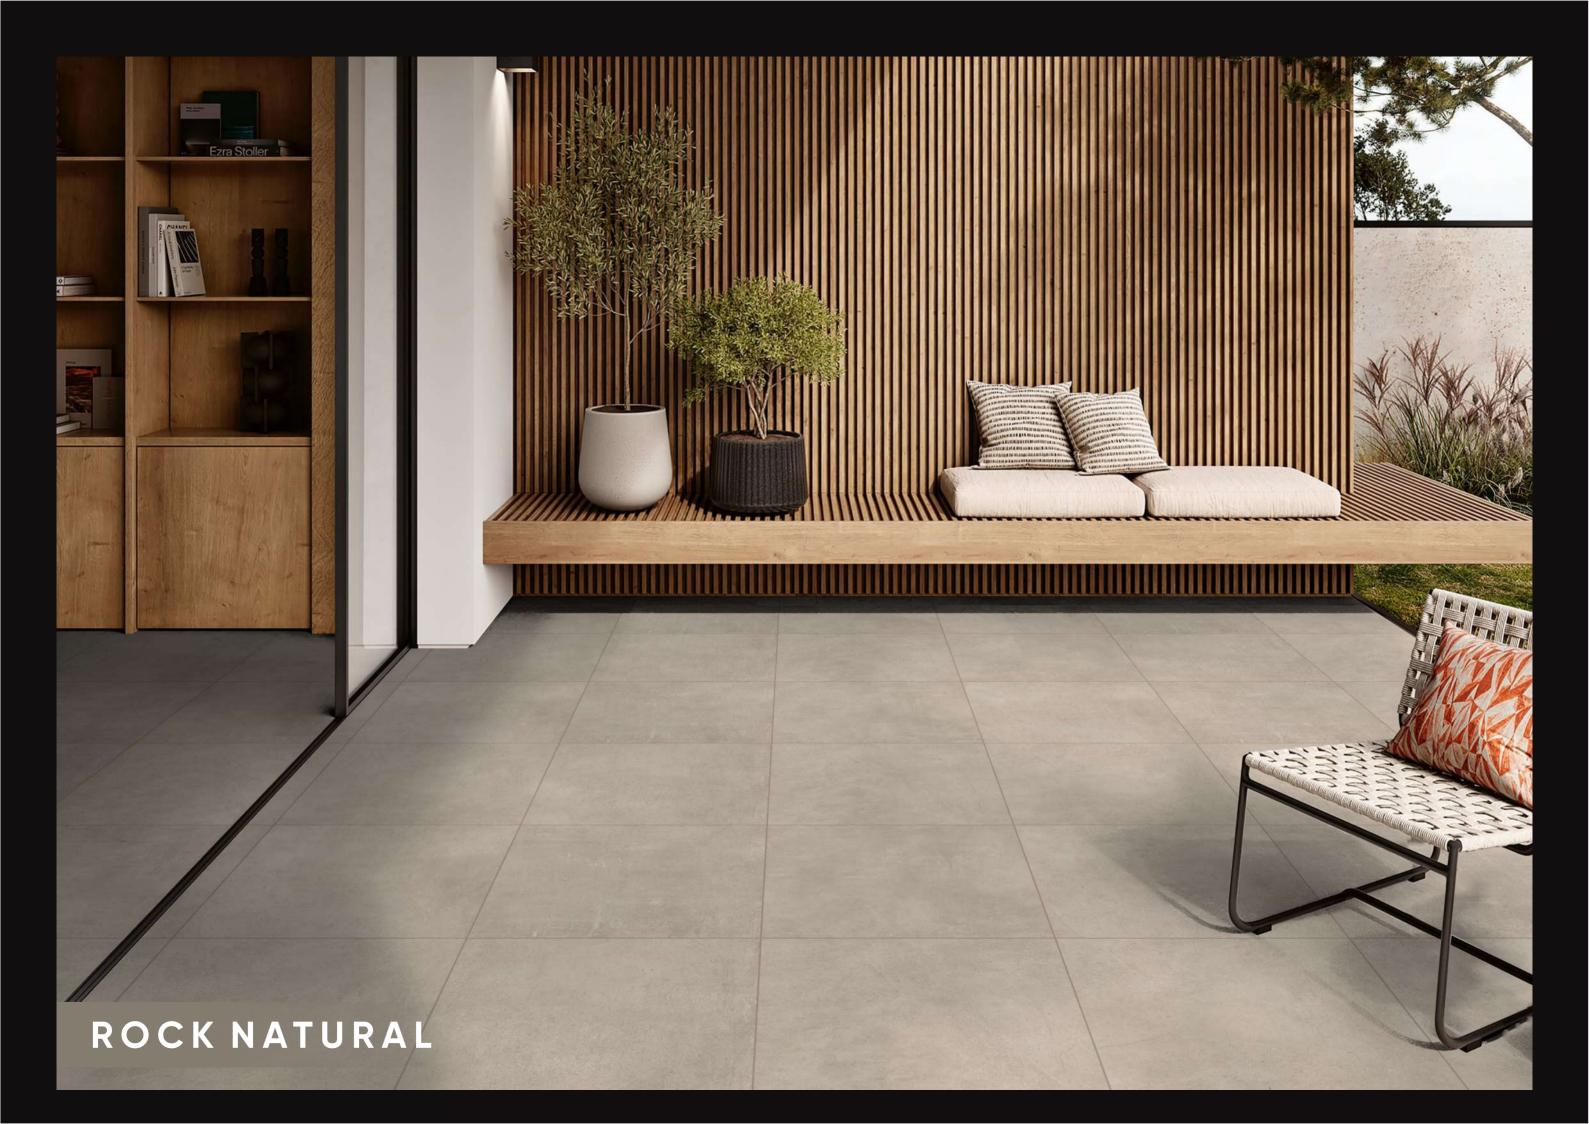

ROCK TAUPE

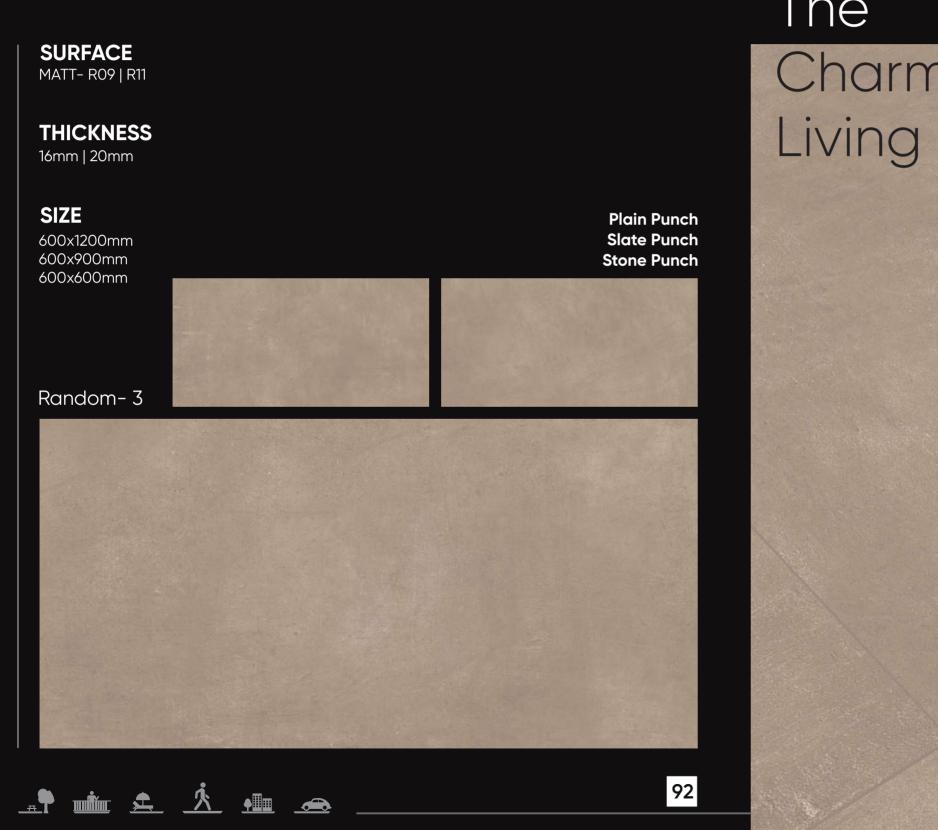

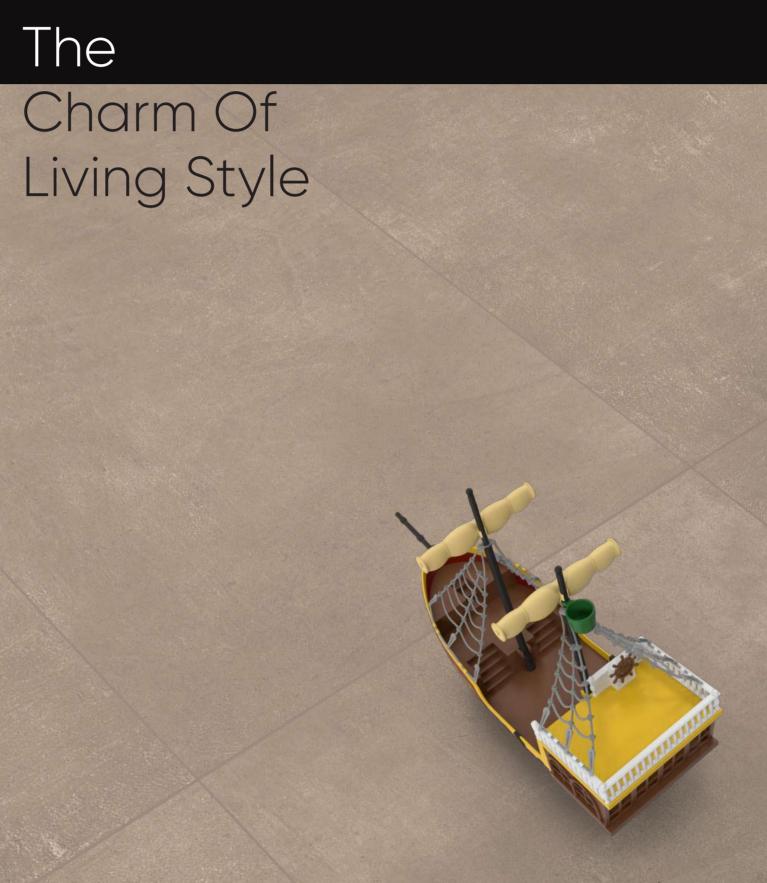



ROME BEIGE




Attitude Is A Part Of Every Day




ROME BIANCO



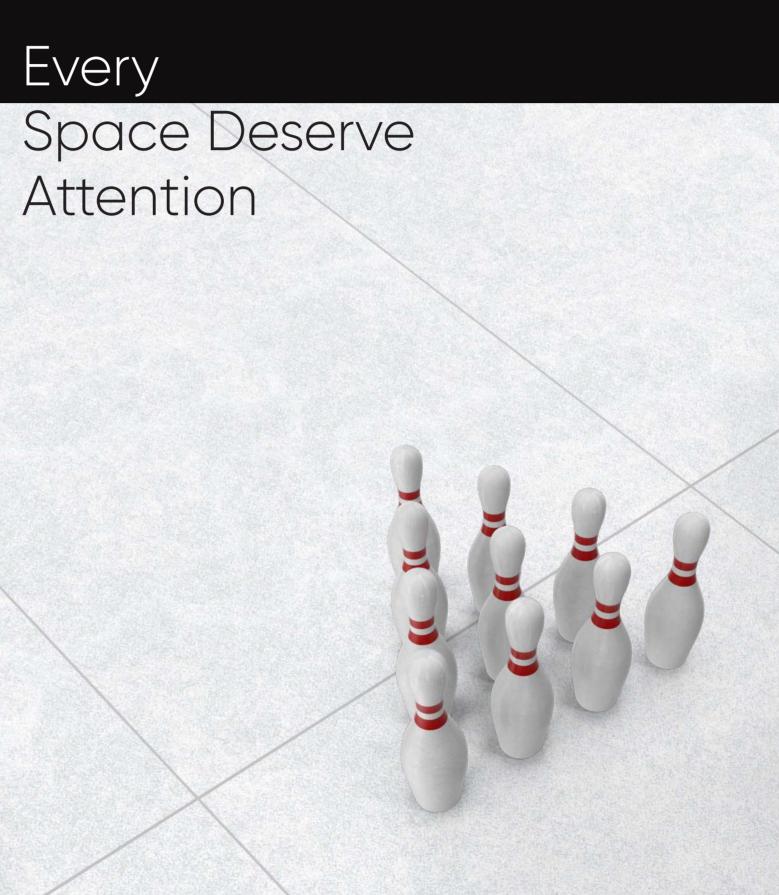



ROME DARK GREY

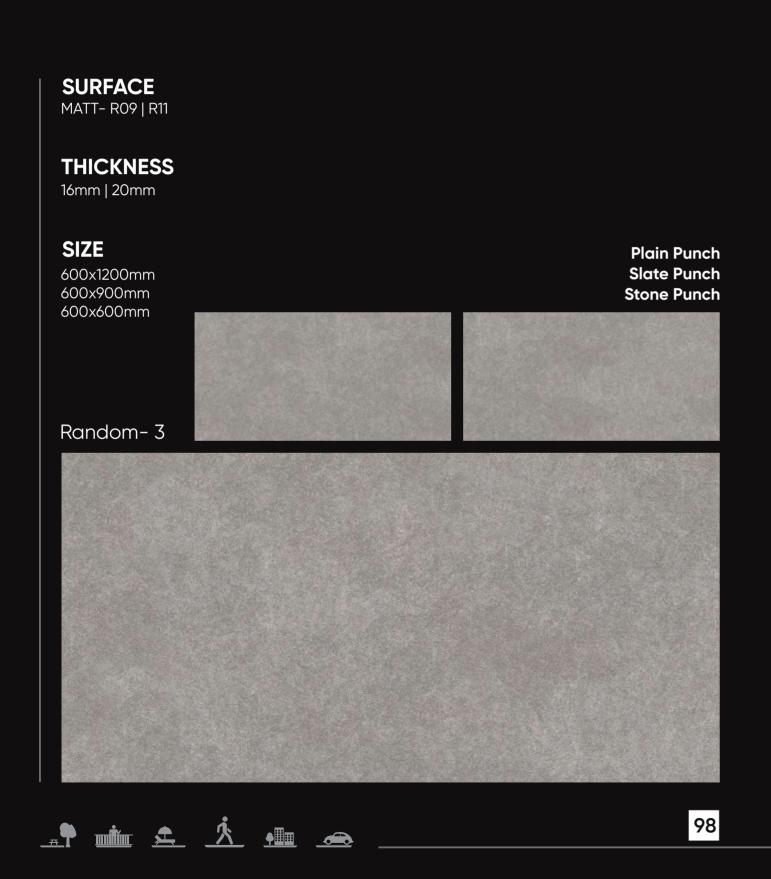

Create Something Unique




ROME LIGHT GREY




Same


Comfort New Look

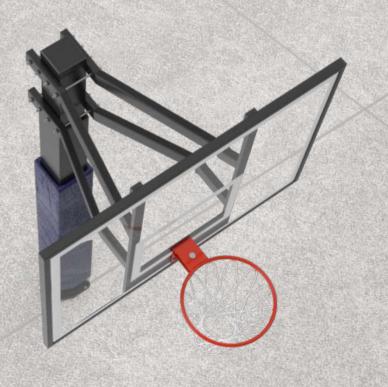




SWISS DARK

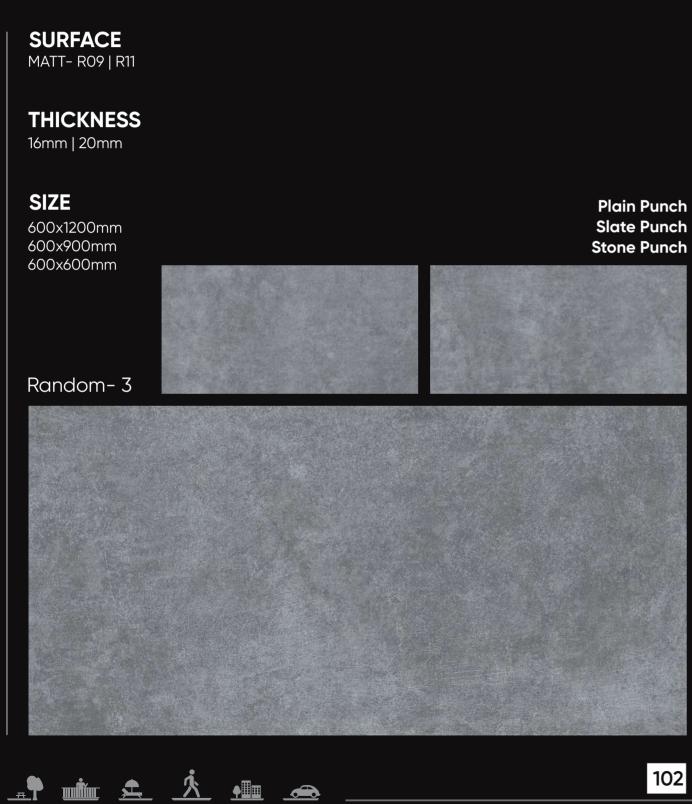

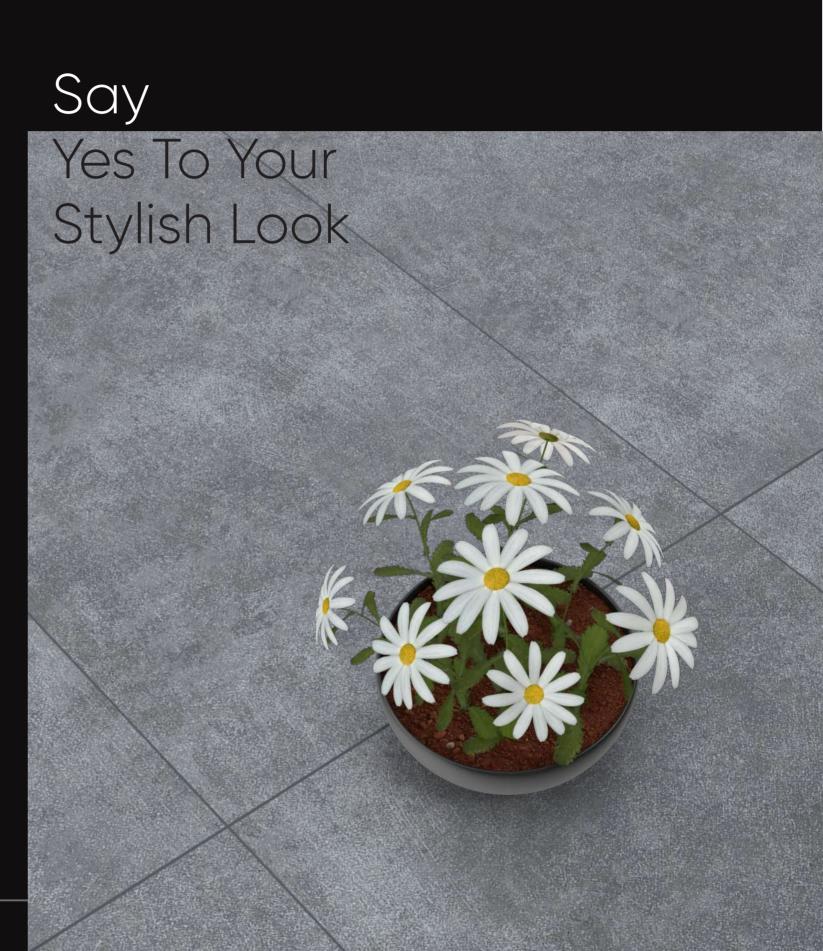



SWISS LIGHT

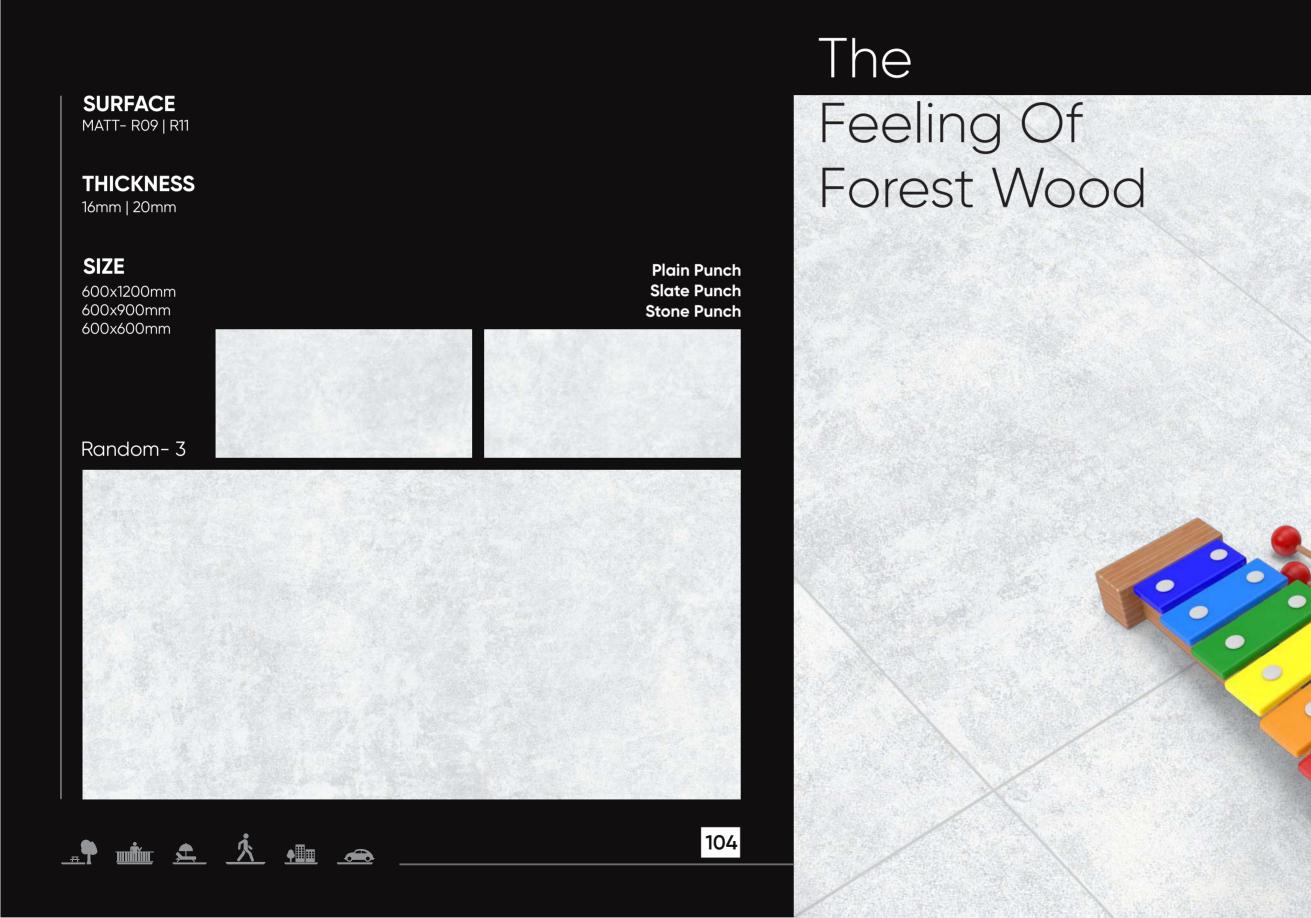





VENICE BIANCO




Live With Adorable Space

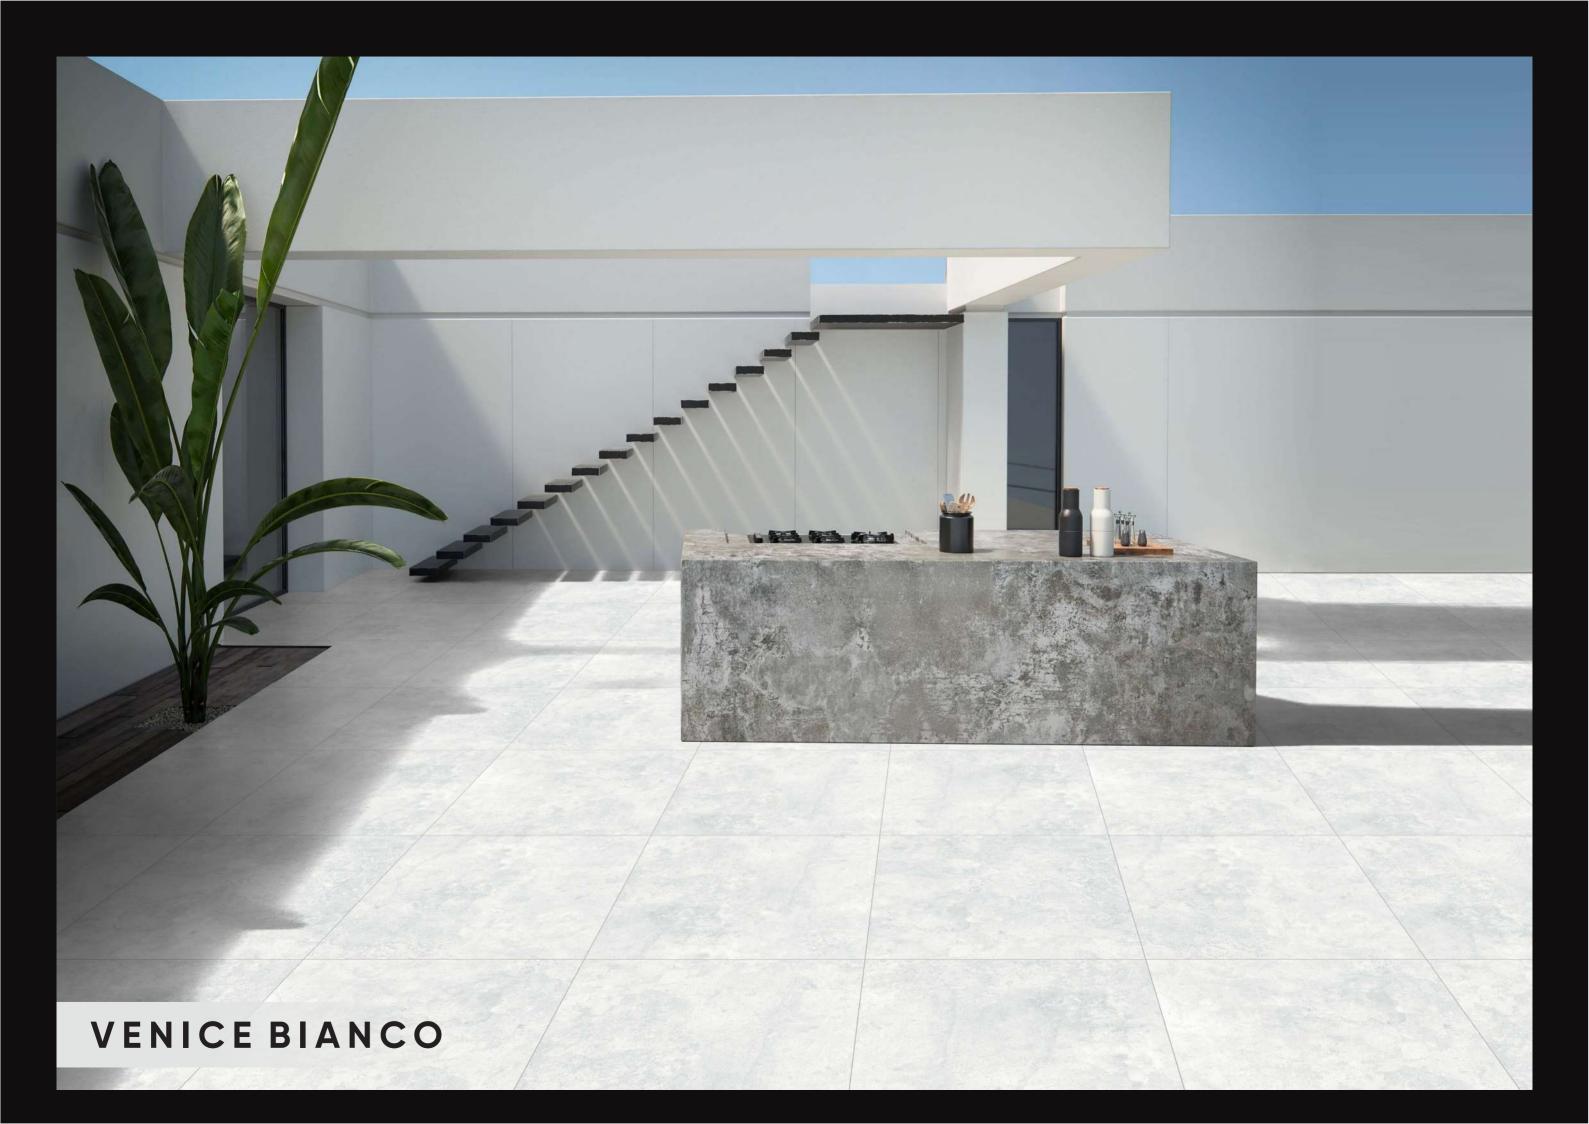

VENICE BLUE

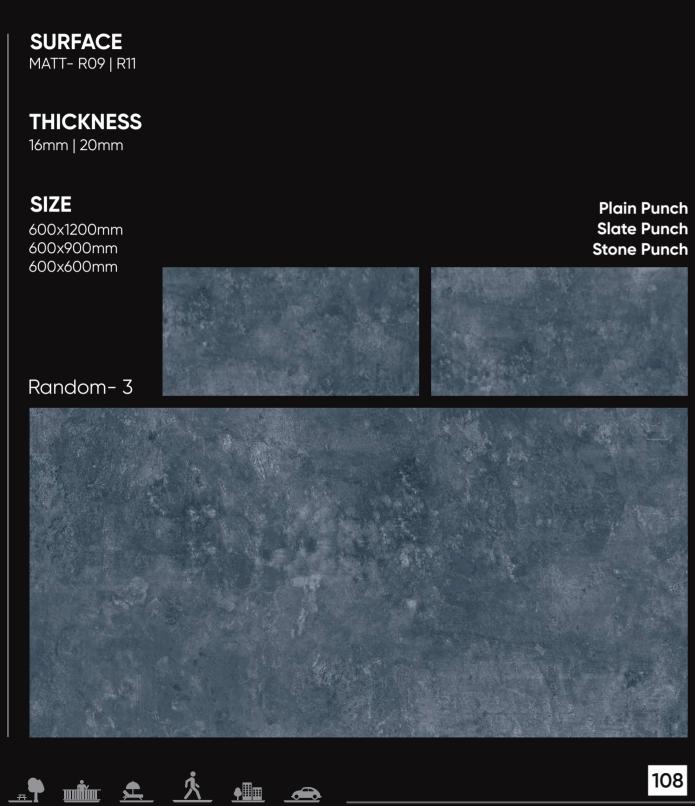

Creation Is The Power Of Art

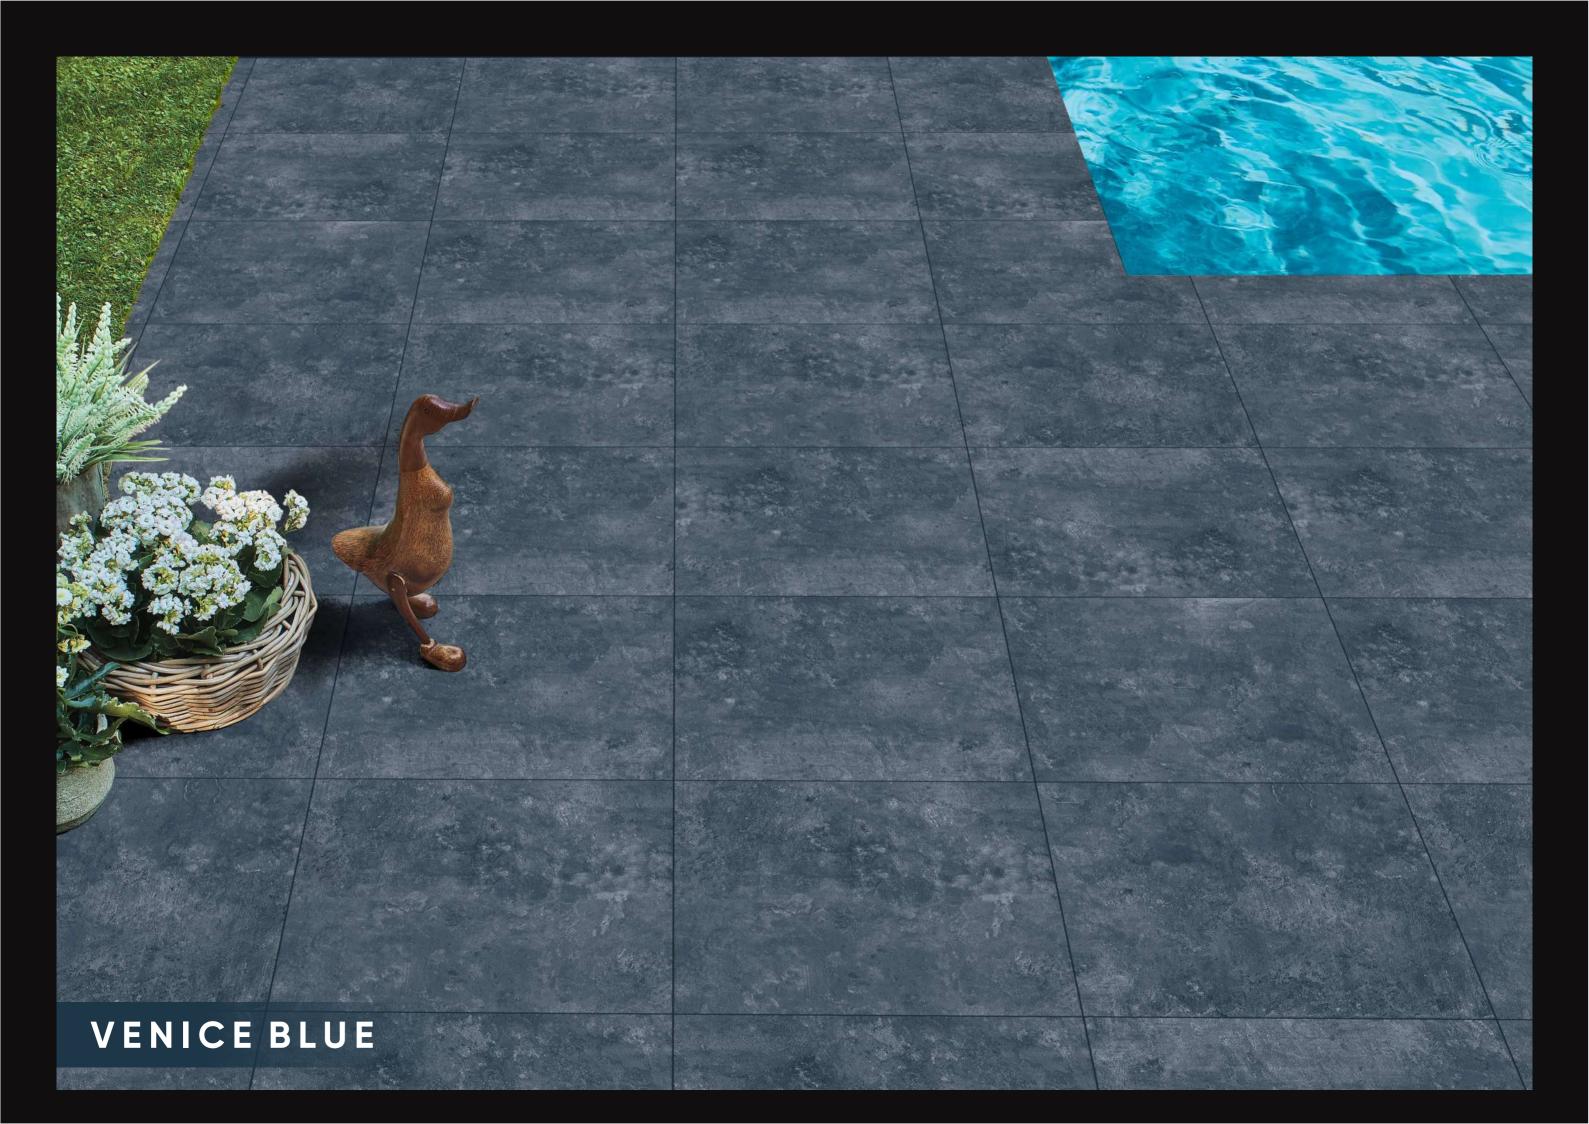

VENICE GREEN




Unique For Your Home



VENICE GREY




Class

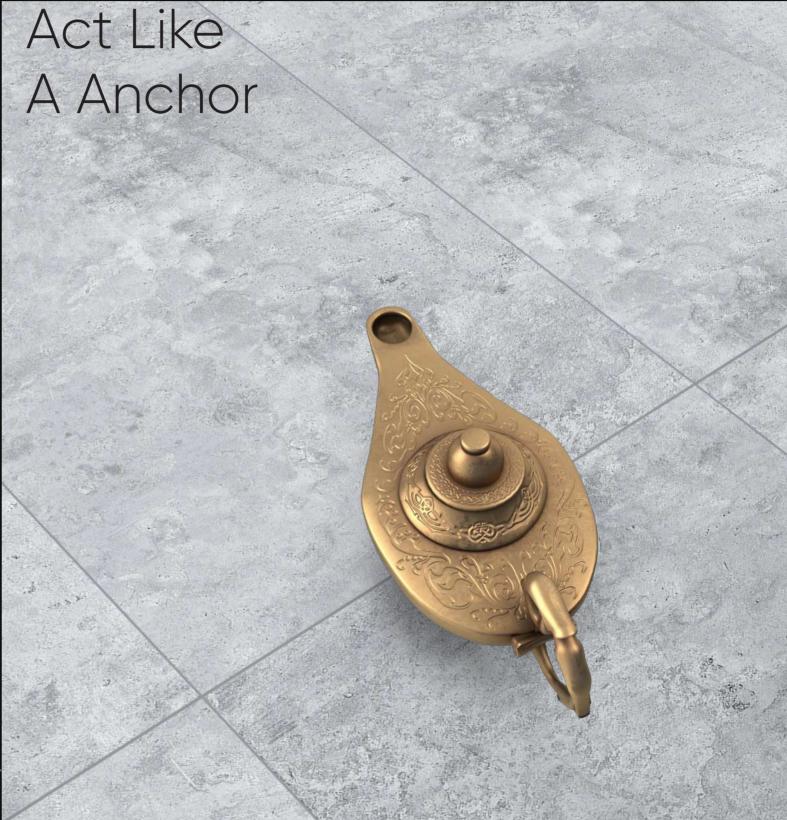




VIENNA SILK

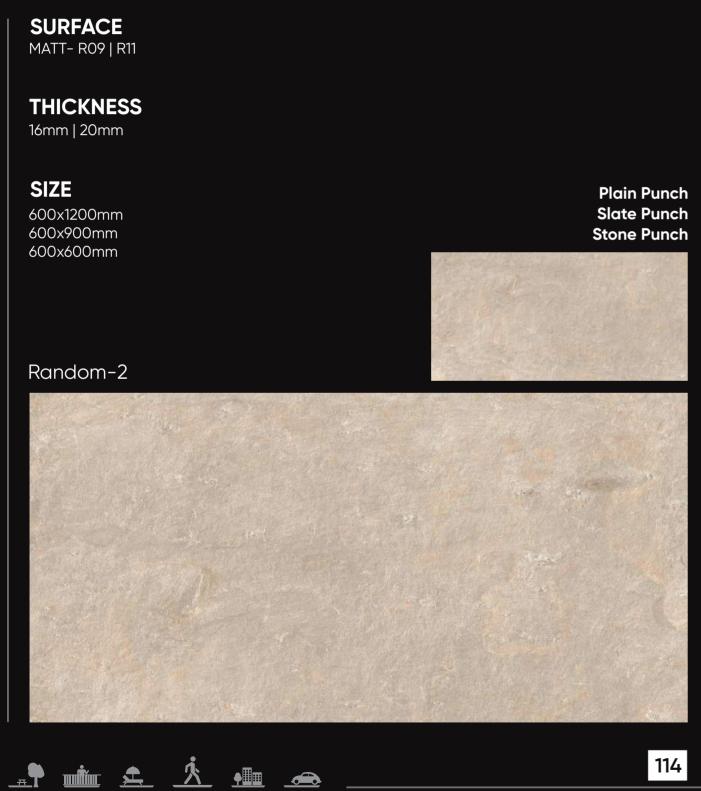

The Best

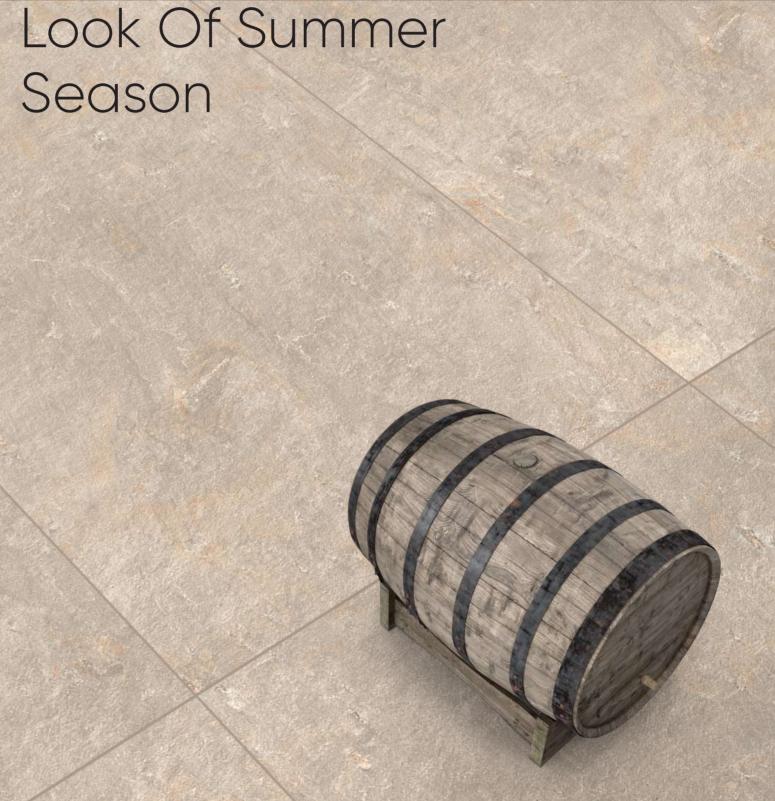



VOLGA BIANCO





VOLGA SILK




Stone





HAMMER STONE BEIGE

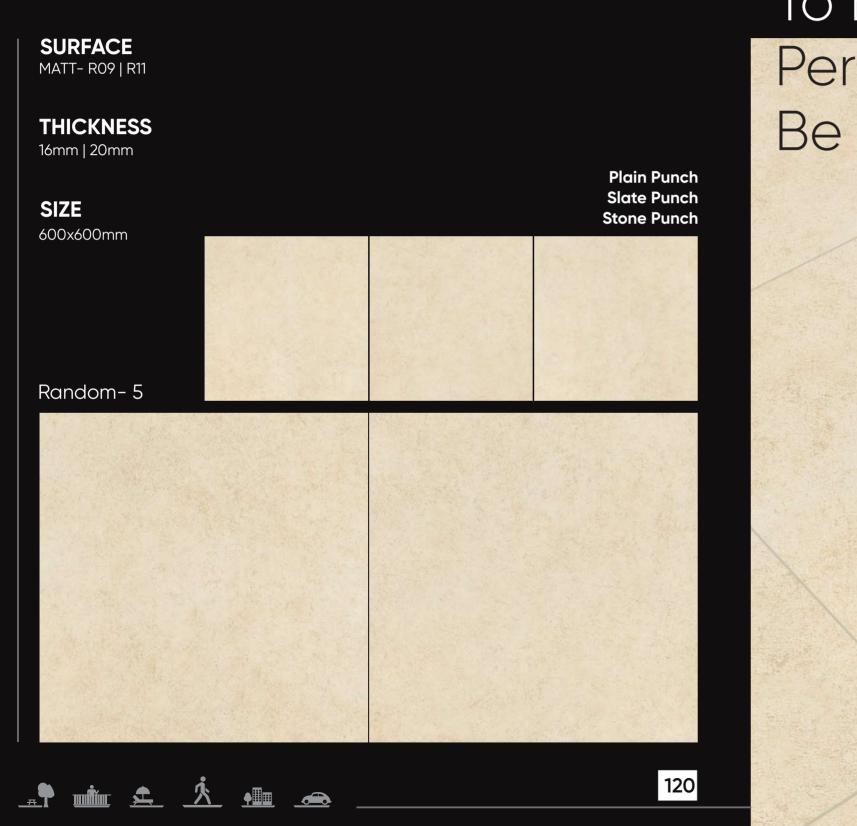




LAVA STONE





QUARTZ GREY

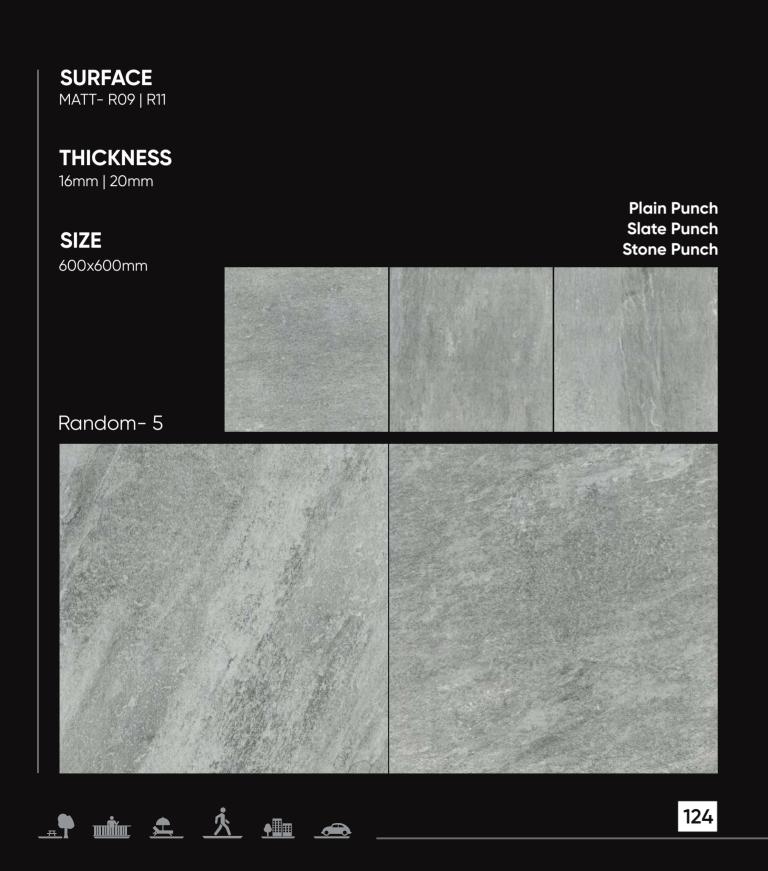


To Be





QUARTZ WHITE

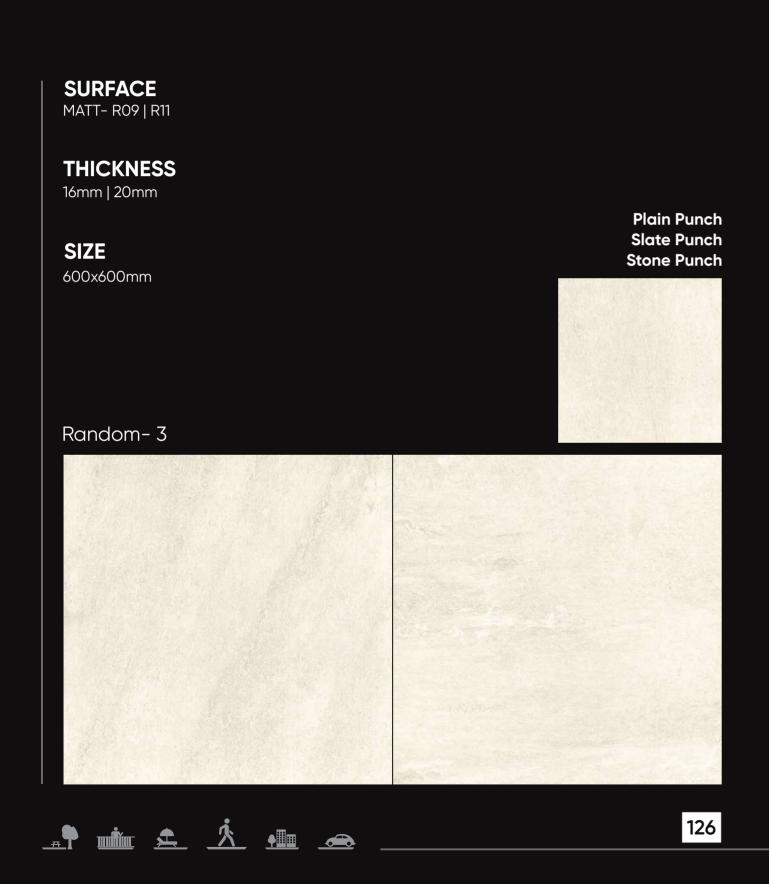



SHERPA BEIGE





SHERPA GREY





PORCELAIN TILES

PORCELAIN STONEWARE TILE 20MM FOR OUTDOOR FLOORING

20mm outdoor porcelain stoneware is the product with the highest technical performance, ideal for flooring in an outdoor environment without the risk of breakage and without interrupting the continuity between interior and exterior spaces. Resistant to frost and thermal

shock, it has intensified anti-slip characteristics and is easy to clean. The perfect union between high technical performance and aesthetics helps maintain the material and color unchanged over time, guaranteeing longlasting durability.

VERSATILE



Easy To Lay, Remove And Reuse



Stable Over Time



Indoor Flooring





Attention To Detail





Can Be Installed With Different Laying Systems

RESISTANT



Frost-Resistant



Fire-proof



Resistant To Stains, Chemical Agents



Resistant To Salt



Resistant To Salt

0 0 。。。



To Heavy Load



High Resistance To Thermal Shock

FUNCTIONAL



Non-slip Surfaces



Resistant To Vehicular Passage

If Applied To A Screed



ECO-FRIENDLY

ECO-FRIENDLY



Eco-friendly


Leed Compliant




PORCELAIN STONEWARE TILE 20MM FOR OUTDOOR FLOORING

Owing to the possibility of installing it dry (on grass, sand, gravel, and elevated floors) the 20mm porcelain outdoor tile collection is the most versatile solution for exterior floors in residential and public areas.

> **OUTDOOR PORCELAIN TILES**







(2) SWIMMING POOLS, SPAS AND ADJOINING AREAS



(3) URBAN FURNITURE **AND PUBLIC PLACES**



4 HIGH-TRAFFIC INDUSTRIAL ZONES





(6) TERRACES AND



(7) CAR PARKS AND DRIVEWAY AREAS



OTHER APPLICATION **SOLUTIONS**


PORCELAIN TILES

LAYING SOLUTIONS

Outdoor Porcelain 20mm Tiles Are An Innovative Solution That Is Very Versatile Due To The Numerous Laying Possibilities They Offer: Dry Installation On Grass, Gravel, Or Sand, Screed With Adhesive, And Elevated Floor Installation.

DRY INSTALLATION ON GRASS





Easy to lay, adjust, and move. An ideal solution for public parks and private gardens

INSTALLATION ON SCREED WITH ADHESIVE




Build resilient and durable outdoor spaces, pathways, driveways, and more with the installation of 20mm tiles on screed with adhesive.

DRY INSTALLATION ON GRAVEL / SAND



Easy to lay, adjust, and move. Boasts ideal aesthetic features to enhance contemporary buildings.

ELEVATED FLOOR INSTALLATION





Easily removable, inspectible, and reusable. Ideal to be applied with different kinds of support and is apt for concealing wiring pipes, and more with accessibility.

CAUTION

- When carrying out an elevated floor installation it is recommended to check the intended use and to follow the installation instructions.
- It is recommended that the designer/client always check the suitability of the installation system selected according to local regulations in force. Failure to follow the above recommendations may result in misuse of the product and cause injury to persons and/or damage to property.

DRY INSTALLATION ON GRASS

To create a pathway with stepping stones, first of all, it is important to determine the number of steps necessary for the entire path, making sure that the tiles are positioned equidistantly. So as to obtain maximum stability, it is recommended to dig out about 5/8cm from the soil, and then place a fine layer of gravel. Compact the substrate and then position the tile. To allow the turf to grow well, it is advisable to leave a gap of at least 10cm between one tile and another.

RESISTANT



SAFE AND STABLE



LONG-LASTING








It Is Good Practice To Lay The Surface Of The Tiles In Line With The Turf: This Way There Is No Risk Of Damaging The Lawn Mowers

EASY TO CLEAN

DRAINS

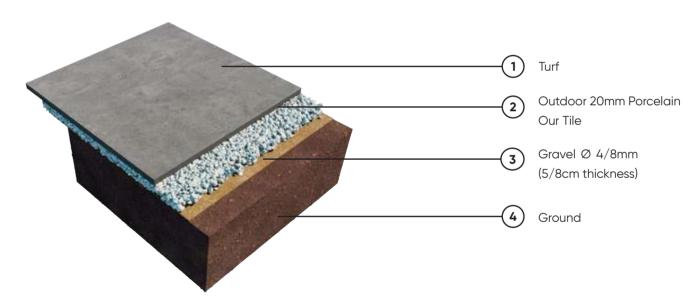








Remove the turf and dig out about 5cm of soil. Form $\boldsymbol{\alpha}$ stable and uniform substrate using fine gravel (grain size 4/8mm)



Lay the tile, so as to have an approximately 0.5cm level difference, between the tile and the ground. To simplify tile installation it is possible to use suitable tile installation handles. Knock the tile along the edges with a rubber hammer until it is at the same level as

CAUTION -


The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring.

CAUTION -

PORCELAIN TILES

DRY INSTALLATION ON GRAVEL / SAND

For installation on sand it is good to remember to place a geotextile on the gravel, on which to spread out a layer (from 2 to 5cm thick) of dry sand with a grain size of 0/2mm. It is necessary to compact the sand with a vibro-compacting plate before proceeding with the installation of the tiles. For particular uses and for stressful loads, it is advisable to consult a technician in order to calculate precisely the thicknesses of the various layers of the substrate.

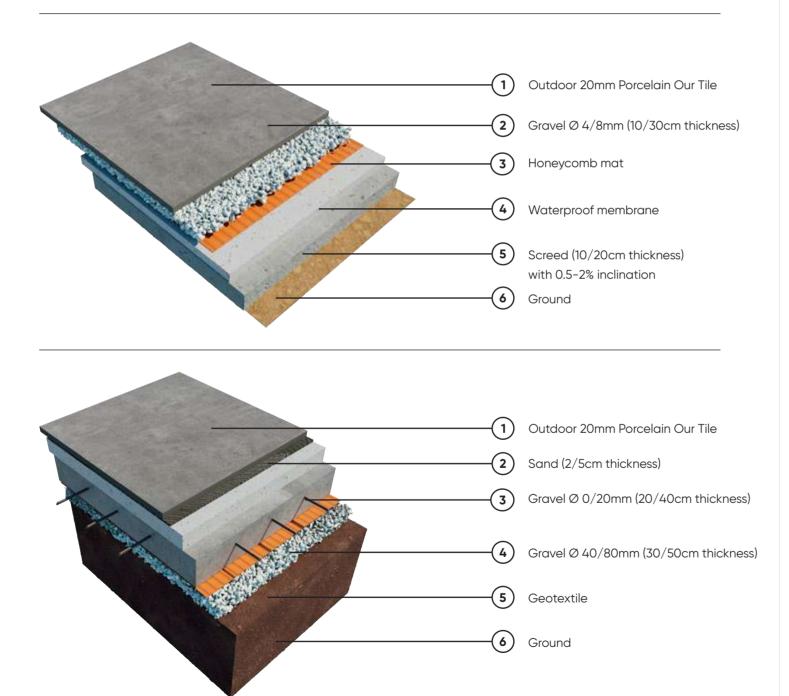

The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor.

DRY INSTALLATION ON GRAVEL / SAND


In Order To Avoid The Displacement Of The Substrate And Consequently The Tiles, The Substrate Must Be Partitioned With Containment Edges Or Perimeter Curbs.



Form a stable and uniform substrate using fine gravel or sand. Level the substrate with a metal straight edge.



Position the tile and then compact the edges in order to level the tile with the substrate. It is suggested to use a joint of at least 4mm to allow good water drainage.

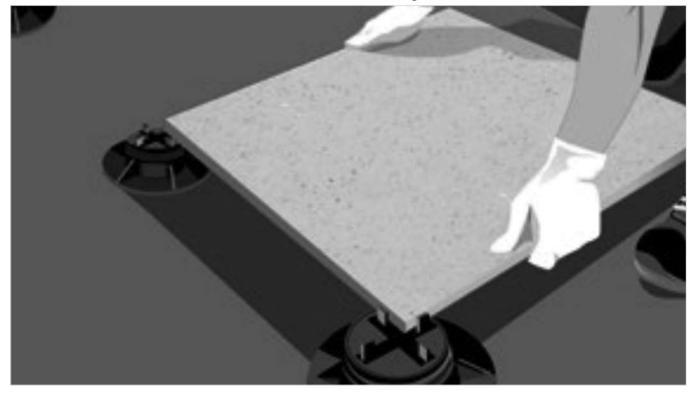


Spacers designed for laying tiles on sand or gravel are an extremely versatile and practical system despite their simplicity. The support is made up of a head with a spacer cross and a removable tip: the fins of the head cross help position the tiles and create the joint between them, ensuring that over time the flooring maintains its correct positioning. The tip is specific for application on sand: the elongated shape guarantees the anchorage and stability of the tiles, preventing them from slipping. For use on gravel, it is possible to remove the tip and place the spacer head directly on the gravel.

PORCELAIN TILES

ELEVATED FLOOR INSTALLATION

The elevated floor technology offers many specific and immediately perceivable advantages: it allows the passage of cables, pipes and necessary installations to be managed easily; it enables the underfloor to be inspected easily and guarantees an effective draining of Rainwater. Thanks to the presence of independent elements, elevated floors absorb expansion and structural movements, thus avoiding the formation of cracks on the waterproof embrane. The absence of the screed makes it possible to substantially reduce the weight that burdens the structures, while offering a high resistance to loads.

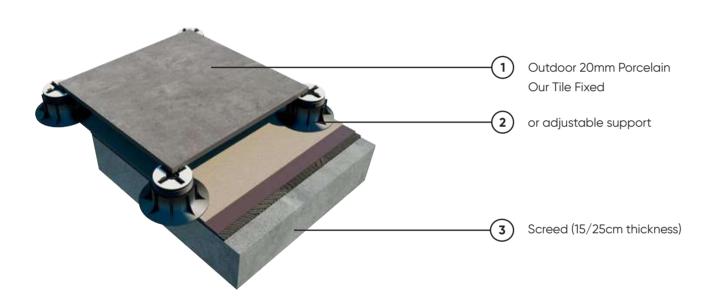

For The Optimal Drainage Of Rainwater, The Elevated Flooring Must Be Installed With A Slope Of Between 1.5% And 2%.



The installation on the plastic supports must only been done on perfectly waterproof substrates. Before proceeding with the installation clean the substrate thoroughly.



With regard to the number and position of the supports, as well as the type of reinforcement on the back of the slab, it is recommended to follow the instructions given in the following table, which are essential to evenly distribute the load.



With the use of the special adjustment key it is possible to obtain a perfectly stable surface and with the required slope for better water drainage.


CAUTION —

The application layers proposed are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor.

ELEVATED FLOOR INSTALLATION - SUPPORTS

Fixed supports and self-levelling adjustable supports

The structure of the supports consists of a base (which rests on the slab), a central screw adjustable in height and a head (on which the tile rests) which can be fixed or self-levelling with a self-adjustment system to alter inclination by up to 5° .

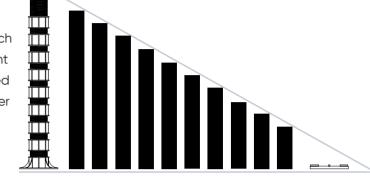



They are made entirely of recycled and recyclable material



Resistant to both acidic and alkaline solutions



Resistant to both acidic and alkaline solutions



Resistant to temperatures of between -30 °C and +120°C



Made of polypropylene



Resistant to the crushing test with a load superior to 1




Format 60x90cm


Noise reduction of up to 25dB




Possibility of using supports made with self-extinguishing material, which prevents the propagation of flames



Format 60x90cm






PORCELAIN TILES


SPECIAL ELEMENTS

In order to guarantee excellent aesthetics and functionality for the various possible applications, the 20mm outdoor porcelain Our tile collections have a rich set of step elements and special pieces.

- 1 Stair tile with straight edge
- (2) Stair tile with rounded edge
- (3) Stair tile with straight ribbed edge
- (4) Stair tile with rounded ribbed edge
- (5) Right corner piece with straight edge
- 6 Right corner grid
- (7) Left corner grid

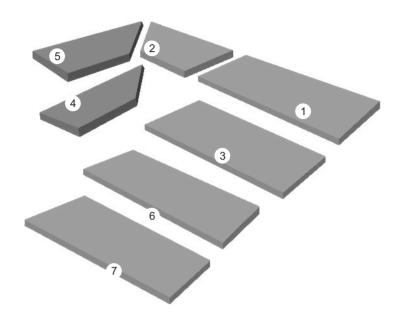


STAIR TILE WITH STRAIGHT EDGE




- 1 Stair tile with straight edge
- (2) Stair tile with rounded edge
- (3) Adhesiv
- (4) Screed
- 5 Flooring
- (6) Grid
- 7 Swimming pool covering

STAIR TILE WITH ROUNDED EDGE



SWIMMING POOL EDGE



CAUTION —

The images are to be taken as an indication, and have the sole purpose of showing how to obtain a correct flooring. It is recommended to always refer to the specific norms and regulations in each individual country and the instructions of the project supervisor.

TECHNICAL DETAILS

TEST DESCRIPTION	ISO-13006/EN176 GROUP BIA	MEAN VALUE OF OUR	TEST METHOD	
Length & width	±0.6 %	±0.3mm	Passed	
thickness	±5 %	±0.3mm	Passed	
Straightness of side	±0.5 %	±0.3 %	Passed	
Rectangularity	±0.6 %	±0.3 %	Passed	
Surface flatness	±0.5 %	+0.35mm to -0.1mm	Passed	
Surface quality	Minimum 95 %	Minimum 95 %	Passed	
Water absorption	< 0.5 %	< 0.04 %	Passed	
Breaking strength	> 1300N	> 1500N	Passed	
Flexural strength (Average)	> 35N/mm ²	> 40N/mm²	Passed	
Scratch hardess of surface (Moh's scale)	> 6	> 6	Passed	
Resistance to deep abrasion	<175mm ³	<144mm³	Passed	
Skid Resistance (Friction coefficient)	>0.4	>0.4	Passed	
Bulk Density, in (g/cc)	>2	>2	Passed	
Linear Thermal expansion	Max. 9.0 ⁻⁴ x K ⁻⁶ , Max	Max. 9.0 ⁻⁶ x K ⁻⁶ , Max	Passed	
Thermal shock resistance	No damage	No damage	Passed	
Frost resistance	Frost proof	Frost proof	Passed	
Resistance to Chemical	Resistance	Resistance	Passed	
Resistance to Stain	Resistant	Resistant	Passed	
Moisture expansion	Nil	Nil	Passed	
Colour resistance	Resistant	Resistant	Passed	
Glossiness (Polished)	-	-	Passed	

PACKING DETAILS (OUTDOOR):-

SIZE	BOX WEIGHT	PCS/BOX	SQM/BOX	SQFT/BOX	BOX/PALLET	PALLET/CTN	BOXES/CTN	TOTAL SQM/CTN	CTN WEIGHT (KG)
600x1200mm (20mm)	32.5	1	0.72	7.75	30	28	840	604.8	28000
600x900mm (20mm)	24.5	1	0.54	5.81	40	28	1120	604.8	28000
600X600 (20mm)	32	2	0.72	7.75	36	24	864	622.08	28000
600x1200mm (16mm)	25.5	1	0.72	7.75	70 & 34	12 & 7	1078	776.16	28000
600x900mm (16mm)	-	-	-	-	-	-	-	-	-
600X600mm (16mm)	25.5	2	0.72	7.75	40	27	1080	777.6	28000

The information contained in this catalogue is a accurate as possible, but cannot be considered as legally binging. The Company reserves the right to make ant modification that become necessary due to production requirements. Weight colors and dimensions are subject to the inevitable variation typical of the ceramic firing process. the colors are possible to the actual colors, within the limits allowed by the printing process. for technical printing reasons, the colors shown may slight differ from the actual tiles. VITRIFIED RESERVES THE RIGHT TO MODIFY THE TECHNICAL INFORMATION QUOTED IN THIS CATALOGUE.



Your Ceramica

contact@yourceramica.com www.yourceramica.com +919979604896